

SECTION

(Showing reinforcement clearances for slip forming and additional reinforcement bars)

GENERAL NOTES

which are to be revised as shown to provide additional clearance. Additional concrete needed to revise dimension A and B= 0.0165 cu. yds./ft. of parapet.


locations in lieu of cork joint filler.

Place aluminum sheet in curb portion at and near piers. Full thickness saw cut at all joint

All dimensions shall remain the same as shown on contract plans, except dimensions A and B

#3 (E) BAR

1'-0"

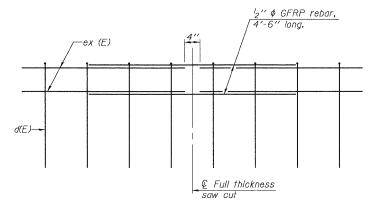

GFRP REBAR STIFFENING DETAIL

(Place as shown in parapet section at each parapet joint location.)

CONCRETE PARAPET SLIPFORMING OPTION SN 006-0172 (EB) & SN 006-0173 (WB)

F.A.I. RTE. Coombe-Bloxdorf P.C. SECTION COUNTY SHEET NO. 21 -STRUCTURAL ENGINEERS-LAND SURVEYORS-TC BUREAU 344 174 CONTRACT NO. 66908 LAND SURVEYORSDesign Firm License No. 184-002703 FED. ROAD DIST. NO. 7 | ILLINOIS | FED. AID PROJECT

DATE = 09/08/2009

NAME = ...@0060172_0173-66908

SCALE = 04.029397 '4" / IN.

NAME = CFC.

SFP-34

10-1-08

*06-[7BR & BR-1, 7VB-M, 6BR & 6, 7 RS-1 & I]