

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES


1. Reinforcement bars shall conform to the requirements of ASTM A 706 Gr 60. See Special Provisions.
2. Reinforcement bars designated (E) shall be epoxy coated.
3. The existing structural steel coating contains lead. The Contractor shall take appropriate precautions to deal with the presence of lead on this project.
4. Layout of slope protection system may be varied in the field to suit ground conditions as directed by the Engineer.
5. The Contractor shall drive test piles to 110% of the nominal required bearing specified in production locations at substructures specified or approved by the Engineer before ordering the remainder of piles.

INDEX OF SHEETS

- 1 General Plan
- 2 General Notes, Index of Sheets & Bill of Material
- 3 Offset Sketch and Footing Layout
- 4 Top of Slab Elevations Layout
- 5-6 Top of Slab Elevations - Eastbound
- 7-8 Top of Slab Elevations - Westbound
- 9 Top of Approach Slab Elevations (Eastbound)
- 10 Top of Approach Slab Elevations (Westbound)
- 11 Superstructure
- 12 Superstructure Details I
- 13 Superstructure Details II
- 14 Superstructure Details III
- 15 Concrete Parapet Slipforming Option
- 16-17 Bridge Approach Slab Details
- 18 Drainage Scupper, DS-II
- 19 Framing Plan
- 20 72" PPC Bulb-T Beam-Permanent Bracing & Moment Tables
- 21 72" PPC Bulb-T Beam - Spans 1 & 3
- 22 72" PPC Bulb-T Beam - Span 2
- 23 72" PPC Bulb-T Beam - Details
- 24 East Abutment - Eastbound
- 25 West Abutment - Eastbound
- 26 East Abutment - Westbound
- 27 West Abutment - Westbound
- 28 Pier 1 - Eastbound
- 29 Pier 2 - Eastbound
- 30 Pier 1 - Westbound
- 31 Pier 2 - Westbound
- 32 Bar Splicer (Coupler) Details
- 33 Steel H Pile Details
- 34-39 Boring Logs

TOTAL BILL OF MATERIAL

ITEM	UNIT	SN 006-0174 (EB)		SN 006-0175 (WB)		TOTAL
		SUPER	SUB	SUPER	SUB	
Porous Granular Embankment (Special)	CU YD		295		295	590
Stone Riprap, Class A4	SQ YD		1945		1945	3,890
Stone Riprap, Class A5	SQ YD		1264		1264	2,528
Filter Fabric	SQ YD		3342		3342	6,684
Removal of Existing Structures	EACH					2
Structure Excavation	CU YD		511		511	1,022
Concrete Structures	CU YD		311.9		310.2	622.1
Concrete Superstructure	CU YD	539.2		539.2		1,078.4
Bridge Deck Grooving	SQ YD	954		954		1,908
Concrete Encasement	CU YD		10		10	20
Protective Coat	SQ YD	1,188		1,188		2,376
Furnishing and Erecting Precast Prestressed Concrete Bulb-T Beams 72"	FOOT	1,304		1,304		2,608
Reinforcement Bars, Epoxy Coated	POUND	103,480	50,120	103,480	49,950	307,030
Bar Splicers	EACH	84		84		168
Furnishing Steel Pile, HP14x73	FOOT		3,325		3,261	6,586
Driving Piles	FOOT		3,325		3,261	6,586
Test Pile Steel HP14x73	EACH		4		4	8
Name Plates	EACH	1		1		2
Anchor Bolts, 1 1/2"	EACH		8		8	16
Geocomposite Wall Drain	SQ YD		92		92	184
Pipe Underdrain for Structures 4"	FOOT		128		128	256
Drainage Scuppers, DSII	EACH	5				5
Hot-Mix Asphalt Surface Removal (Asbestos)	SQ YD	783		783		1,566

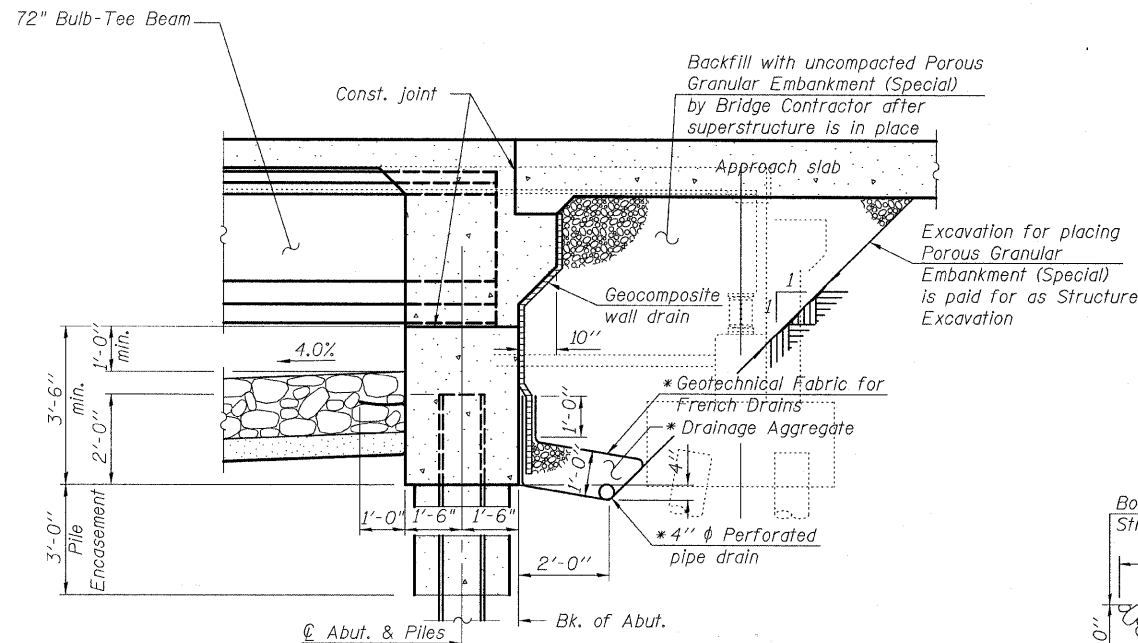


SECTION THRU INTEGRAL ABUTMENT
(Horiz. dim. @ Rt. L's)

* Included in the cost of Pipe Underdrains for Structures

All drainage system components shall extend 2'-0" from the end of each wingwall except an outlet pipe shall extend until intersecting with the side slopes. The pipes shall drain into concrete headwalls. (See Article 601.05 of the Standard Specifications and Highway Standard 601101)

DESIGNED	IM
CHECKED	PDF
DRAWN	IM
CHECKED	PDF

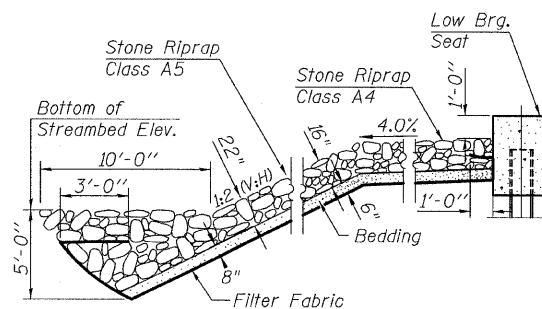


STONE RIPRAP ANCHOR DETAIL

STATION 3609+06.64
BUILT 201 BY
STATE OF ILLINOIS
F.A.I. RT. 80 SEC. 06-7BR-1
LOADING HS20 & ALT.
STR. NO. 006-0175

NAME PLATE WESTBOUND
See Std. 515001

STATION 3609+06.64
BUILT 201 BY
STATE OF ILLINOIS
F.A.I. RT. 80 SEC. 06-7BR-1
LOADING HS20 & ALT.
STR. NO. 006-0174

NAME PLATE EASTBOUND
See Std. 515001

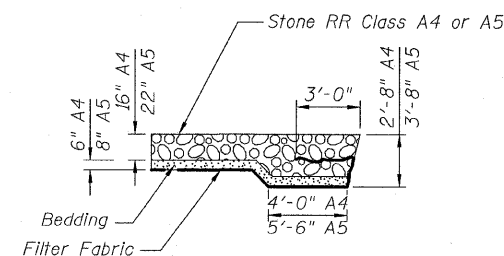

SECTION A-A

**GENERAL NOTES, INDEX OF SHEETS
& BILL OF MATERIAL**
STRUCTURE NO. 006-0174 (EB)
STRUCTURE NO. 006-0175 (WB)

SHEET NO. 2	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	80	*	BUREAU	394	200
39 SHEETS	CONTRACT NO. 66908				
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT		

TYLINTERNATIONAL

* 06-T7BR & BR-1,7VB-M, 6BR & 6, 7 RS-1 & II