



L	A	B
< 150	25'	-
> 150	50'	-
≥ 200	50'	150'

* TO BE DETERMINED BY GEOMETRICS AND SHOWN IN PLANS




BI-DIRECTIONAL TURN ARROW @ 200' O. C.


SPEED	CHANNELIZATION & GORES	OBJECTS	CONTINUOUS
< 30 MPH	15'	10'	50'
30-45 MPH	20'	15'	75'
> 45 MPH	30'	20'	150'

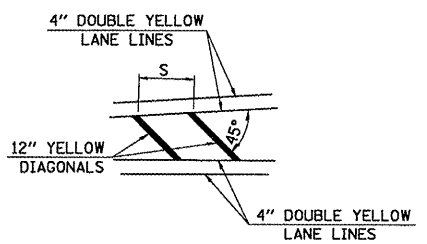


TYPICAL APPLICATION FOR MEDIAN STRIPING

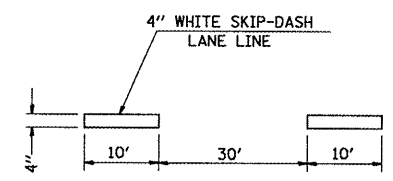


TYPICAL APPLICATION FOR WHITE SKIP-DASH LANE LINES

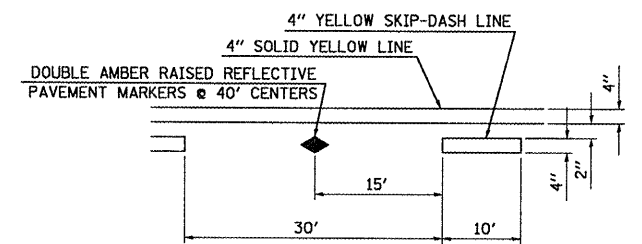


TYPICAL APPLICATION FOR BI-DIRECTIONAL TURN LANE WITH RAISED REFLECTIVE PAVEMENT MARKERS

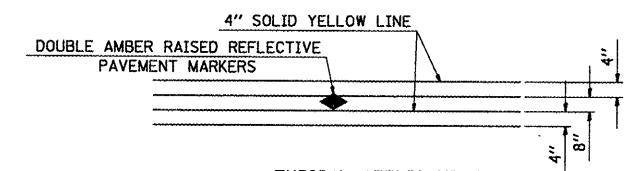

TYPICAL APPLICATION FOR DOUBLE YELLOW LANE LINES WITH RAISED REFLECTIVE PAVEMENT MARKERS

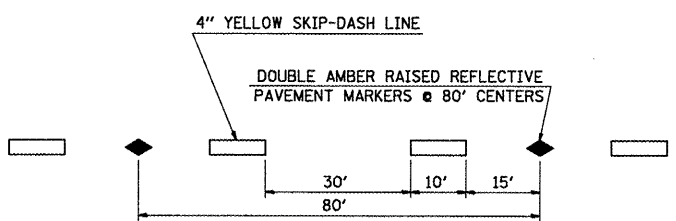

TYPICAL APPLICATION FOR YELLOW SKIP-DASH LINES WITH RAISED REFLECTIVE PAVEMENT MARKERS

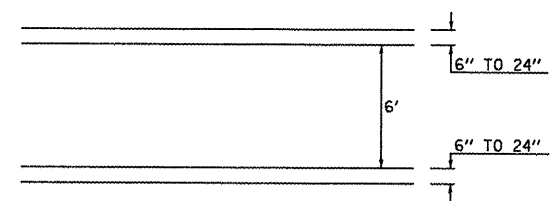

TYPICAL APPLICATION FOR PEDESTRIAN CROSSWALK