

## STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths					
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	Table 5
<i>3, 4</i>	1'-5''	1'-11''	2'-1''	2'-4''	2'-3"
5	1'-9''	2'-5"	2'-7''	2'-11''	2'-10''
6	2'-1''	2'-11''	3'-1''	3′-6′′	3'-4''
7	2'-9''	3′-10′′	4'-2"	4'-8''	4'-6''
8	3'-8''	5′-1′′	5′-5′′	6'-2"	5′-10′′
9	4'-7''	6′-5′′	6′-10′′	7′-9′′	7′-5′′

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C


Table 4: Epoxy bar, Top bar lap, 0.8 Class C

Table 5: Epoxy bar, Top bar lap, Class B

Threaded splicer bar length = min. lap length +  $1_2^{\prime\prime}$  + thread length

\* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.


	Location	Bar	No. assemblies	Table for minimum
L	Locarion	size	required	lap length
	SN 082-0152 Deck	#6	32	Table 3
	SN 082-0152 Hatch	#6	16	Table 3
	SN 082-0153 Deck	#6	32	Table 3
	SN 082-0153 Hatch	#6	16	Table 3



# INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt.
"B": Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E): Indicates epoxy coating.



## STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required	

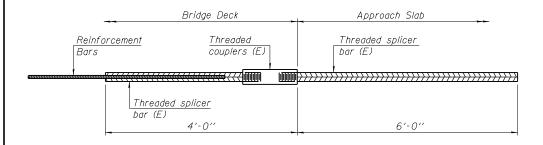

# BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

No, required =

# Abutment Approach slab Threaded couplers (E) BAR SPLICER ASSEMBLY FOR #5 BAR ON STUB ABUTMENTS No. required = Threaded splicer bar (E)

6′-0′′

# NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications. See special provision for Mechanical Splicers.

See approved list of bar splicer assemblies and mechanical splicers for alternatives.

# BSD-1 7-1-10 BENTON & ASSOCIATES, INC.

FILE NAME = P:\ 10e2166-2\ Design\	USER NAME =	DESIGNED - MBH	REVISED - 10/3/13		BAR SPLICER ASSEMBLY AND MECHANICAL SPI
Plans\ 082-0152 & 082-0153		CHECKED - SJH	REVISED	STATE OF ILLINOIS	
0820152-76D22-009-Splicer.don	PLOT SCALE =	DRAWN - MBH	REVISED	DEPARTMENT OF TRANSPORTATION	STRUCTURE NO. 082-0152 & 082-015
. ,	PLOT DATE =	CHECKED - SJH	REVISED		SHEET NO. 9 OF 9 SHEETS

R SPLICER ASSEMBLY AND MECHANICAL SPLICER DETAILS
STRUCTURE NO. 082-0152 & 082-0153

F.A.I. RTE. SECTION COUNTY TOTAL SHEETS NO. 64 82-1HB1-2 ST. CLAIR 208 137
CONTRACT NO. 76D22