



Designer Notes:
 1. Include STD# 604021 "BASE, FRAME & LIDS TYPE 5".
 2. Include STD# 606001 for c.c.&g. details.
 3. Include STD# 420001 for pavement joints.
 4. Frame and lid based upon NEENAH R-6040
 5. Include District Special Provision. Pay item includes transitional c.c.&g., inlet and frame and grate. All work within pay limits.

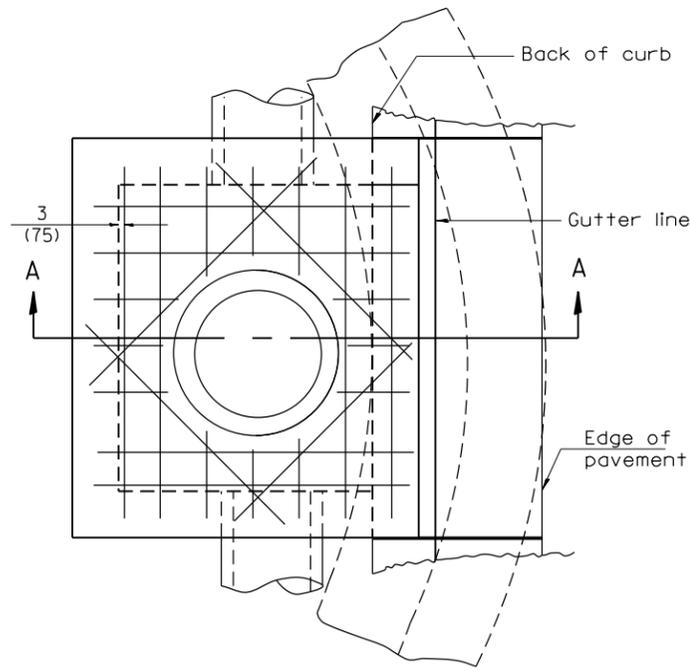


TOP VIEW

When inlet is constructed in return, the top slab shall conform to the radius of the return.

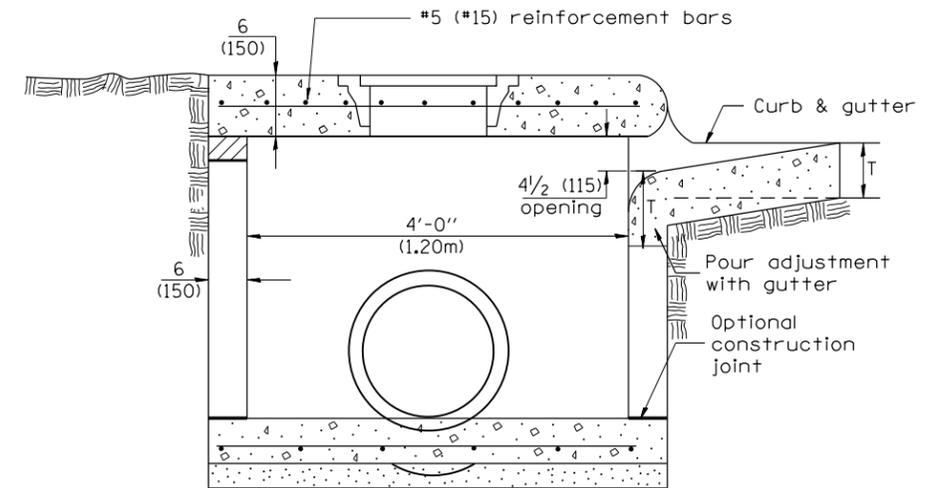


SECTION A-A

LIGHT WEIGHT MANHOLE CASTING

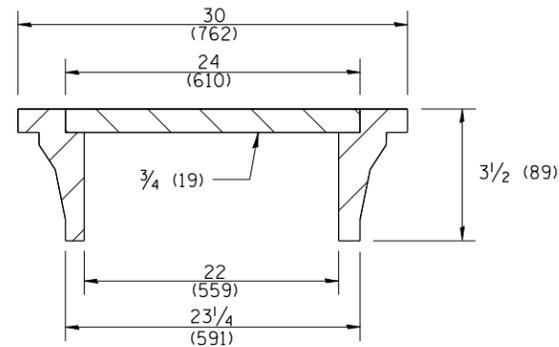

TYPE 5 MODIFIED FRAME, CLOSED LID

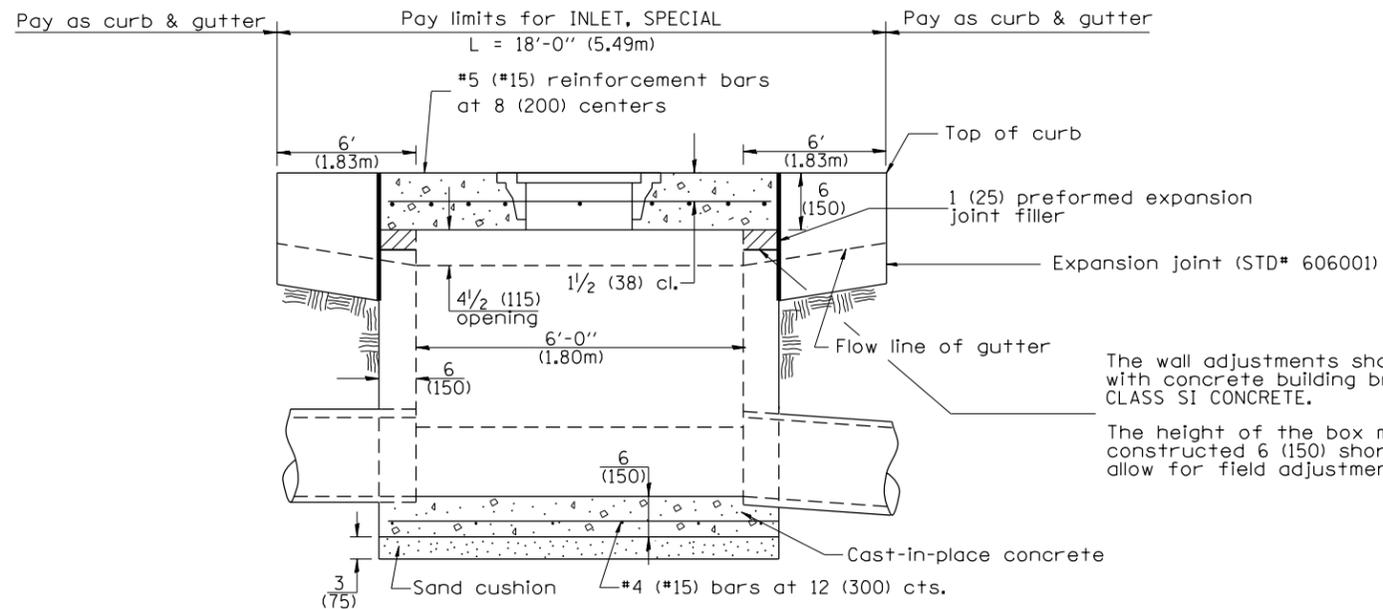

FRONT VIEW

The wall adjustments shall be made with concrete building brick or CLASS SI CONCRETE.
 The height of the box may be constructed 6 (150) short to allow for field adjustments.

NOTES

- The inlet shall be cast-in-place or precast. Except as noted herein INLET,SPECIAL shall be constructed in accordance with Section 602 of the Standard Specifications.

All dimensions are in inches (millimeters) unless otherwise noted.

01-01-97	RENUM. B-4.08, NEW REVISION BOX, REVISED	T.P.			
	FRAME DIMENSION				
10-16-06	REVISED TO 2007 SPEC.	M.A.			

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

INLETS, SPECIAL WITH TYPE 5 MODIFIED FRAME, CLOSED LID

NOT TO SCALE

CADD STD. 602301-D4

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
CONTRACT NO.				
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				