


DESIGNER NOTES:
1. COVERED BY SECTION 636 OF THE STANDARD SPECIFICATIONS.

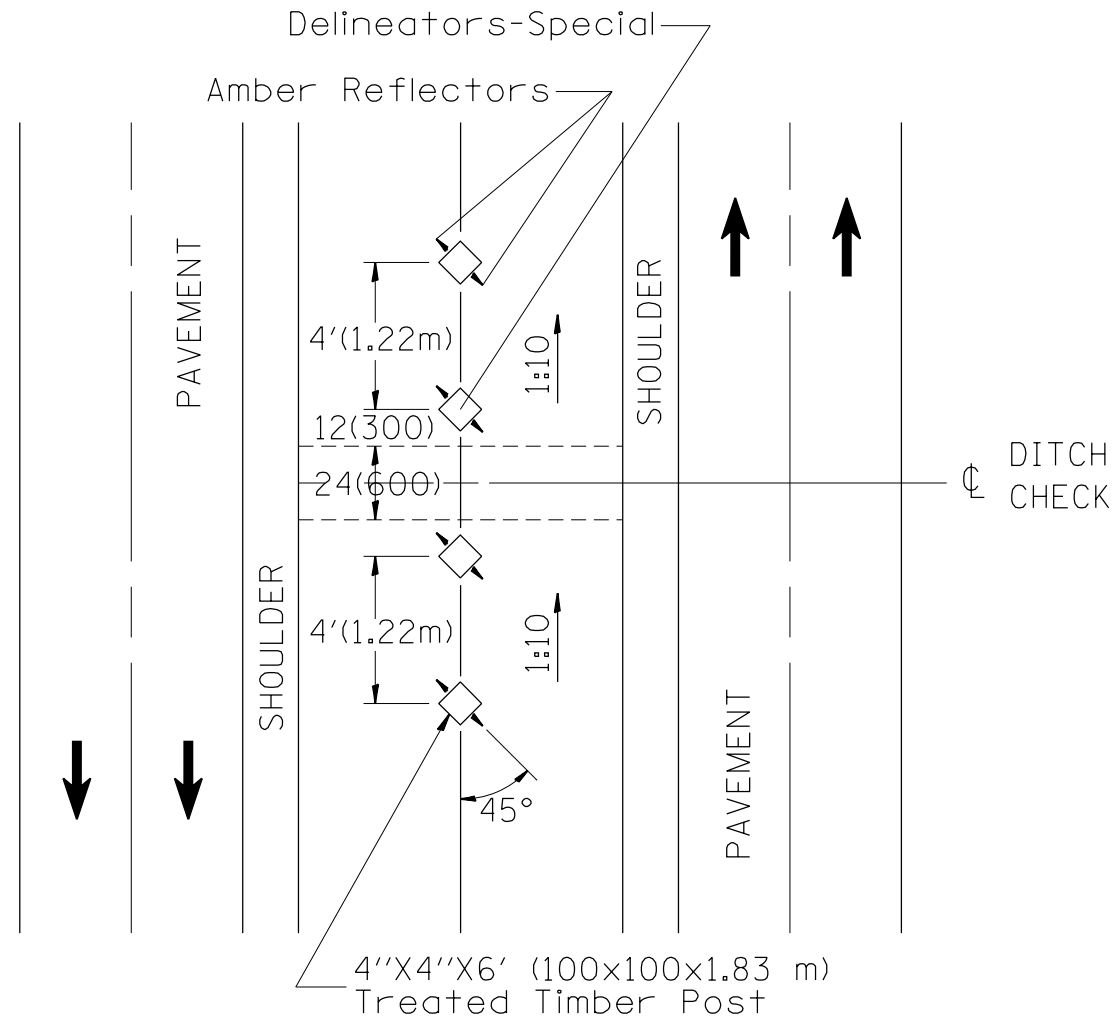

NOTES:

1. DELINEATORS, SPECIAL shall be constructed of 4" x 4" x 6' (100 x 100 x 1.83 m) treated timber.
2. Each post shall be buried a minimum of 36(900) deep.
3. Timber shall be treated in accordance with Article 1007.12 of the Standard Specifications. Waterborne Preservatives, ASA and CCA, shall have A 0.40 lbs/ft³(6.4 kg/m³) minimum retention.
4. Amber Reflectors shall meet the requirements of Article 1097.03 of the Standard Specifications.

All slope ratios are expressed as units of vertical displacement to units of horizontal displacement (V:H).
All dimensions are in inches (millimeters) unless otherwise noted.

01-01-97	RENUM. E-10.01, METRICS, NEW REVISION BOX, ADDED	T.P.	8-8-12	REVISED NOTES	R.D.	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DELINEATORS-SPECIAL	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
	DESIGNER NOTE, REVISED GENERAL NOTES, REVISED													
	TITLE BOX													
10-16-06	REVISED TO 2007 SPEC.	M.A.				NOT TO SCALE	CADD STD. 635001-D4	CONTRACT NO.						
								FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT						