

**SUMMARY OF QUANTITIES**


LOCATION OF WORK: TOWANDA STORAGE  
 MCLEAN COUNTY  
 URBAN

FUNDING BREAKOUT: 100% STATE

CONSTRUCTION TYPE CODE: 0005

CODE NO	ITEM	UNIT	TOTAL QUANTITY
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	690.0
40600300	AGGREGATE (PRIME COAT)	TON	14.0
40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	773.0
67100100	MOBILIZATION	L SUM	1.0

**PROPOSED TYPICAL CROSS SECTION**

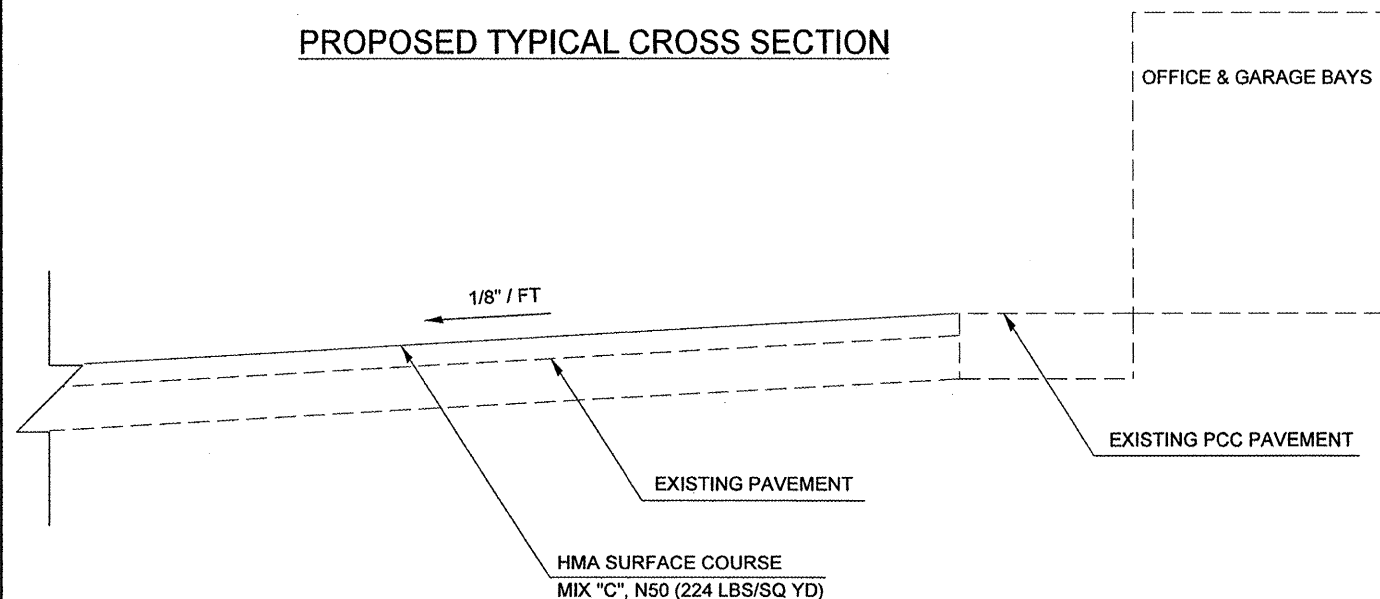

NOTES: TO MAINTAIN THE 1/8"/FT SLOPE THE PARKING LOT SHALL BE PAVED IN A DIRECTION THAT RUNS PARALLEL WITH THE GARAGE AND OFFICE.

ANY MILLING THAT IS NEEDED WILL BE DONE BY THE TOWANDA MAINTENANCE YARD PRIOR TO THE CONTRACT START DATE.

**SCHEDULE OF QUANTITIES**

LOCATION	AREA (SQ YD)	HMA SC THICKNESS (INCHES)	40600100 BIT MATLS		40600300 AGG PR CT		40603310 HMA SURF MIX "C", N50	
			PR CT (GAL)	AGG PR CT (TONS)	PR CT (TONS)	AGG PR CT (TONS)		
1	450.0	2.0	45.0	0.90	50.4			
2	472.2	2.0	47.2	0.94	52.9			
3	1388.9	2.0	138.9	2.78	155.6			
4	888.9	2.0	88.9	1.78	99.6			
5	2166.7	2.0	216.7	4.33	242.7			
6	1166.7	2.0	116.7	2.33	130.7			
7	361.1	2.0	36.1	0.72	40.4			
TOTAL=			689.5	13.8	772.3			
USE=			690.0	14.0	773.0			