


*Alternate with existing vertical reinforcement and epoxy grout into 3/4"φ x 9" drilled holes located as shown in Section A-A. See Section 584 of the Standard Specifications
 **Epoxy grout bars into 1/2"φ x 9" drilled holes located as shown in Section A-A. See Section 584 of the Standard Specifications
 ***See Sheet 22 of 27 for Field Cutting Diagram

MINIMUM BAR LAP


#5 Bar = 3'-3"

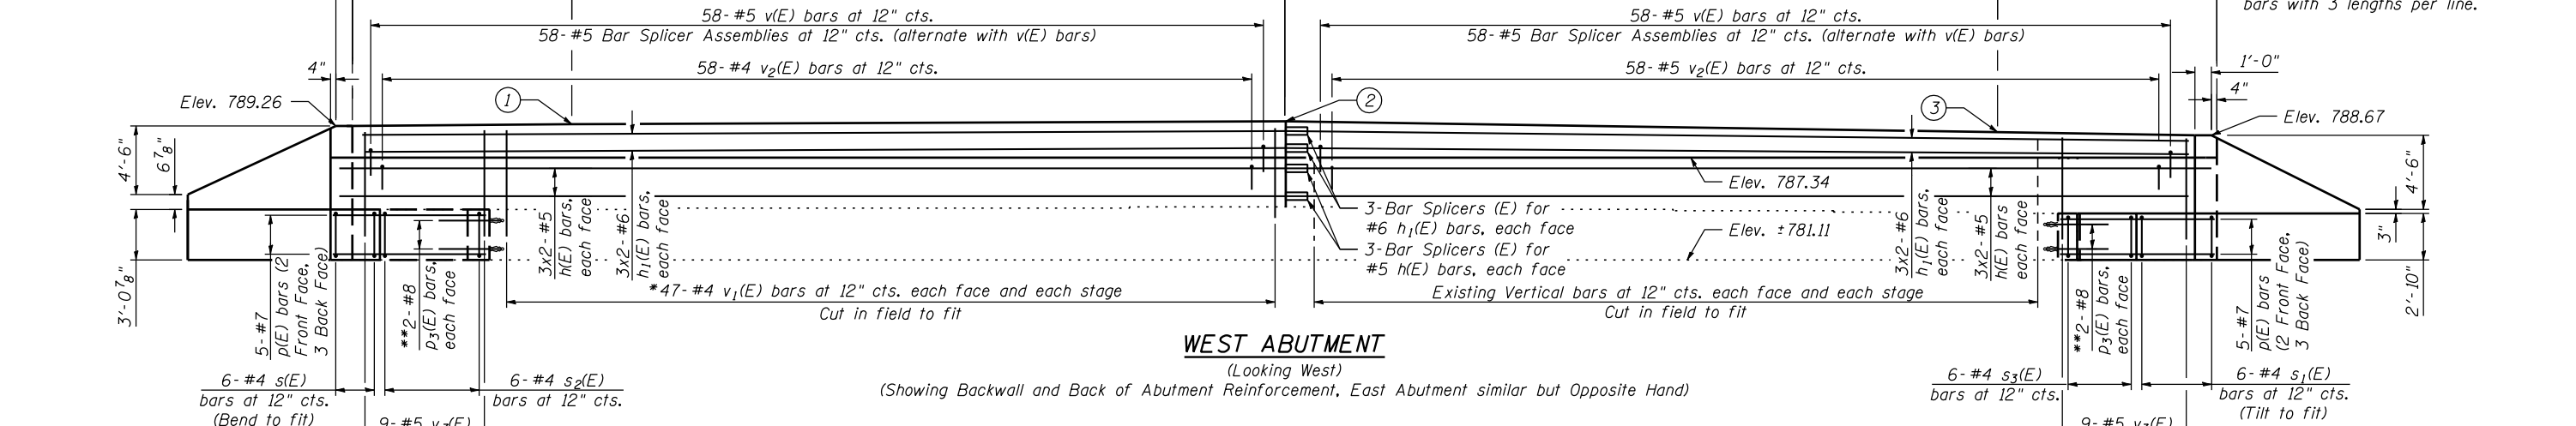

Notes:
 See Sheet 22 of 27 for Section A-A, Section B-B, Section C-C, Bar Details and Bill of Material.
 Bars indicated thus 20 x 3-#5 etc. indicates 20 lines of bars with 3 lengths per line.

- ① South Edge of Eastbound Pavement Elev. 789.37
- ② Crown Point Elev. 789.49
- ③ North Edge of Westbound Pavement Elev. 788.89

- ④ North Edge of Westbound Pavement Elev. 789.34
- ⑤ Crown Point Elev. 789.12
- ⑥ South Edge of Eastbound Pavement Elev. 788.50

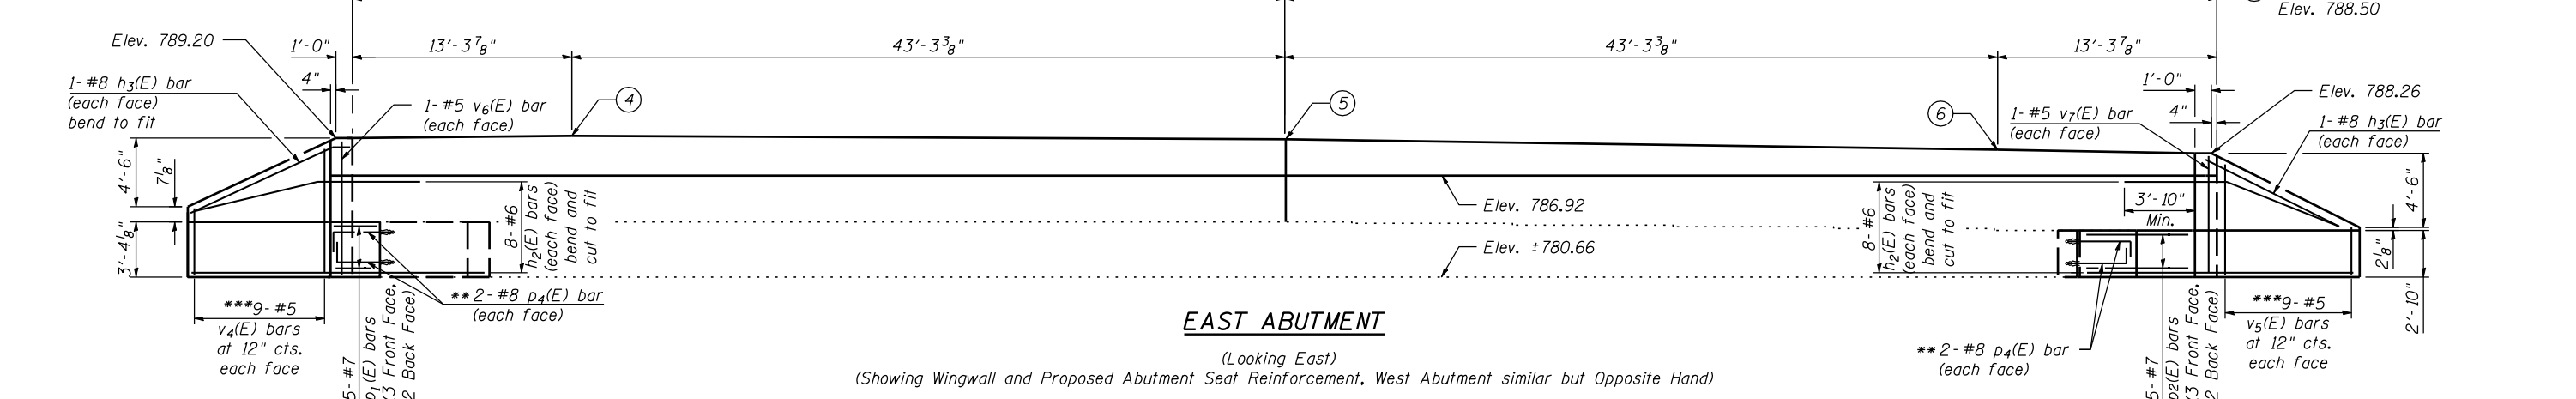

FILE NAME = s:\p1\6380--6395\6346\025\micro\cadd sheets\structural\plans\089-0007-64E76-020-ABUT.dgn

USER NAME = brianf	DESIGNED KDH	REVISED -
PLOT SCALE =	CHECKED AJS	REVISED -
PLOT DATE = 8/6/2012	DRAWN BJF	REVISED -
	CHECKED RRD	REVISED -

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
5	(19VB-1D)	STEPHENSON	73	52
CONTRACT NO. 64E76				
ILLINOIS FED. AID PROJECT				