

| ROUTE | SECTION | COUNTY | TOT. SHTS. | SHT. |
|--------------------------------|----------------|-----------|------------|------|
| FAS 2830 | 05-00189-00-RS | JEFFERSON | 2 | 1 |
| JEFFERSON COUNTY ROAD DISTRICT | | | | |

CONTRACT 99444

STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION

DIVISION OF HIGHWAYS

PLANS FOR PROPOSED FEDERAL AID SECONDARY PROJECT

F.A.S. 2830 C.H. 13
SECTION 05-00189-00-RS
JEFFERSON COUNTY
PROJECT # RS-2830(101)
JOB # C-99-585-06

INDEX OF SHEETS


1. COVER SHEET, LOCATION MAP
2. GENERAL NOTES, TYPICAL EXISTING AND PROPOSED CROSS-SECTIONS, SUMMARY OF QUANTITIES, BITUMINOUS MIXTURE BREAKDOWN, STRIPING, DETAILS OF SIDE ROADS, PRIVATE ENTRANCES, AND MAILBOX TURN-OUTS

STANDARDS

- 000001-06
- 701006-03
- 701306-03
- 701311-03
- 701901-01
- 780001-02
- BLR 21-8
- BLR 22-6

| SUMMARY OF QUANTITIES | | | |
|-----------------------|-------------------------------------------------|--------|----------|
| Code Number | Item | Unit | Quantity |
| XX003140 | SHORT-TERM PAVEMENT MARKING REMOVAL | FOOT | 637 |
| 40200800 | AGGREGATE SURFACE COURSE TYPE B | TON | 225 |
| 40600100 | BITUMINOUS MATERIALS (PRIME COAT) | GALLON | 1298 |
| 40600625 | LEVELING BINDER (MACHINE METHOD) N50 | TON | 763 |
| 40600990 | TEMPORARY RAMP | SQ YD | 15 |
| 40603310 | HOT MIX ASPHALT SURFACE COURSE MIX "C" N50 | TON | 1599 |
| X4401198 | HOT MIX ASPHALT SURFACE REMOVAL VARIABLE DEPTH | SQ YD | 92 |
| 44300100 | AREA REFLECTIVE CRACK CONTROL TREATMENT | SQ YD | 12654 |
| 48101200 | AGGREGATE SHOULDERS, TYPE B | TON | 411 |
| 67100100 | MOBILIZATION | L SUM | 1 |
| 70100460 | TRAFFIC CONTROL AND PROTECTION, STANDARD 701306 | L SUM | 1 |
| 70300100 | SHORT-TERM PAVEMENT MARKING | FOOT | 1274 |
| * 78000200 | THERMOPLASTIC PAVEMENT MARKING-LINE 4" | FOOT | 16515 |

* SPECIALTY ITEMS

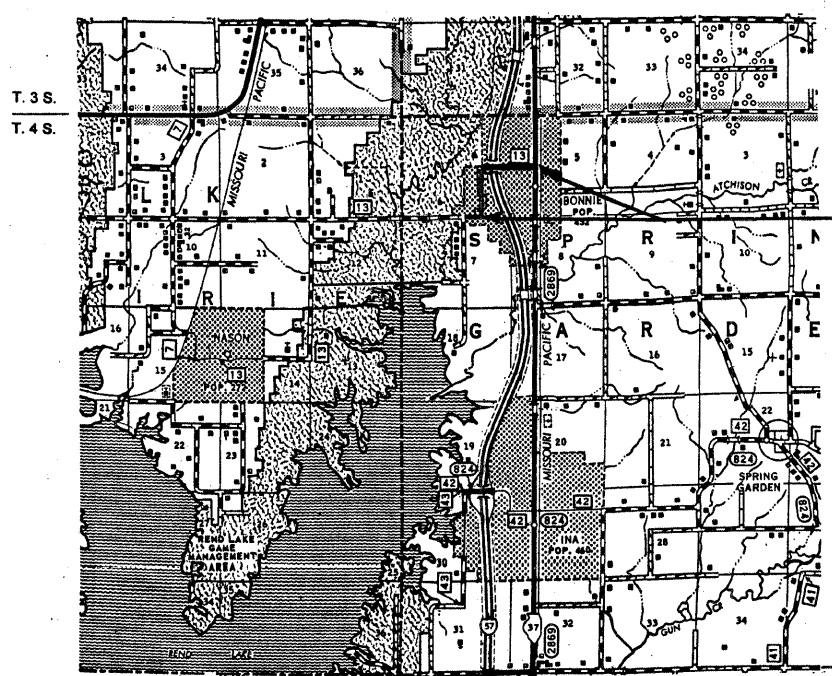

SECTION 05-00189-00-RS
BEGINS STA. 0+00 ENDS STA. 63+27

JEFFERSON CO. T. 4 S.
FRANKLIN CO. T. 5 S.

J. U. L. I. E.
JOINT UTILITY LOCATING
INFORMATION FOR EXCAVATION
1-800-892-0123
WWW.ILLINOIS1CALL.COM

TOTAL SECTION LENGTH = 6,327' = 1.198 MILES
OMISSION = 223' = 0.042 MILES
NET SECTION LENGTH = 6,104' = 1.158 MILES

FUNCTIONAL CLASSIFICATION = MAJOR COLLECTOR
DESIGN SPEED = 35 MPH

APPROVED 12-15 2010

S. SCHNA
REGISTERED PROFESSIONAL ENGINEER
COUNTY ENGINEER
JEFFERSON COUNTY HIGHWAY DEPT.
750 ELD FAIRFIELD RD.
MT. VERNON, IL 62864
PH. (618)244-8031
LICENSE EXP. 11-30-2011

PASSED 12/7 2010

Dennis W. Hille
DISTRICT NINE ENGINEER OF
LOCAL ROADS AND STREETS

Releasing for
limited review 12/7 2010

Mary C. Lamic
DEPUTY DIRECTOR OF HIGHWAYS
REGION FIVE ENGINEER

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION