

NOTES:



1. THE CONTRACTOR SHALL PATCH FIRST BEFORE MILLING FROM STA. 12+17 TO STA. 56+08.
2. THE CONTRACTOR SHALL MILL FIRST BEFORE PATCHING FROM STA. 56+08 TO STA. 118+57.

EXISTING CONDITIONS:

- (A) HOT-MIX ASPHALT SURFACE AND BINDER COURSE, 3" & VARIES
- (A1) HOT-MIX ASPHALT SURFACE AND BINDER COURSE, 6", 7" & VARIES
- (B) PCC BASE COURSE, 9"
- (B1) PCC BASE COURSE, 8"
- (C) COMBINATION CONCRETE CURB AND GUTTER TYPE B-6.12
- (D) ABANDONED STREETCAR TRACKS (RAIL, WOODEN TIES, PAVERS)
- (E) CONCRETE MEDIAN, CONCRETE BARRIER WALL
- (F) TIE BARS

PROPOSED IMPROVEMENTS:

- (1) HOT-MIX ASPHALT SURFACE REMOVAL, 2 1/2"
- (2) POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 1 3/4"
- (3) POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4"
- (4) COMB. CONC. CURB AND GUTTER REMOVAL AND REPLACEMENT (AS DETERMINED BY THE ENGINEER)

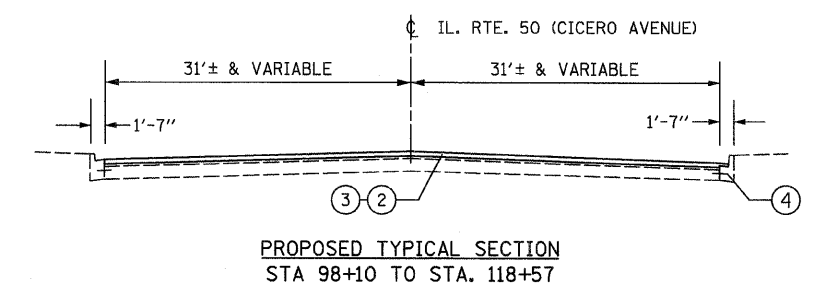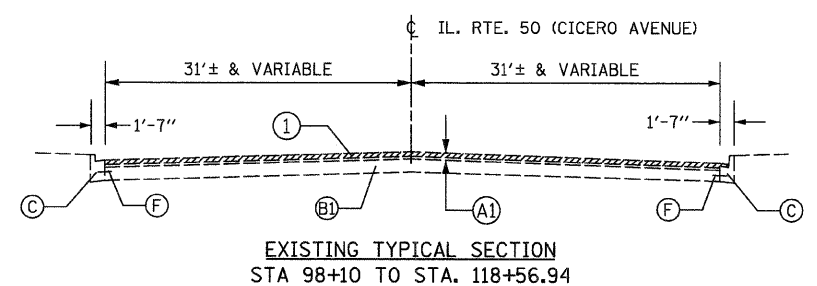

* NOTE: CONTRACTOR SHALL MAINTAIN EXISTING MINIMUM VERTICAL CLEARANCE AS SHOWN ON PLANS.

FILE NAME = D160A50-shr-typical.dgn
PLOT DATE = 1/8/2009

CR CHRISTIAN-ROGE & ASSOCIATES, INC.
ENGINEERS-PLANNERS-SURVEYORS
211 WEST WACKER DRIVE
CHICAGO, ILLINOIS 60606
PHONE: (312)372-2023 FAX: (312)372-5274

DESIGNED - D.L.
DRAWN - B.K.
CHECKED - M.P.
DATE - DECEMBER 1, 2008

REVISED -
REVISED -
REVISED -
REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**TYPICAL SECTIONS
IL. RTE. 50 (CICERO AVENUE) SOUTH OF IL. RTE. 19 TO EDENS EXPY.**

F.A.P. RTE. 350	SECTION 2005-060 RS	COUNTY COOK	TOTAL SHEETS 30	SHEET NO. 5
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT			CONTRACT NO. 60A50	

SCALE: NONE SHEET NO. 2 OF 2 SHEETS STA. 53+75 TO STA. 118+57