



LEGEND

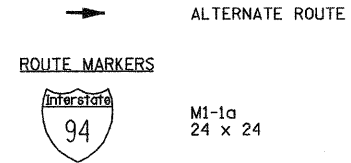

ARROW SIGNS

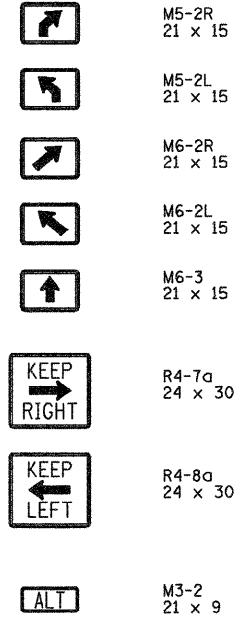

ALTERNATE ROUTE NOTES

1. THIS WORK SHALL CONSIST OF THE FURNISHING, INSTALLATION, MAINTENANCE, RELOCATION AND REMOVAL OF SIGNS AND SUPPORTS FOR THE ALTERNATE ROUTE. THIS WORK SHALL BE PERFORMED ACCORDING TO SECTION 701 OF THE STANDARD SPECIFICATIONS, THE SPECIAL PROVISIONS, IDOT STANDARDS, DISTRICT DETAILS AND THE ALTERNATE ROUTE PLANS CONTAINED HEREIN.
2. ALL TRAFFIC CONTROL DEVICES PER THE ALTERNATE ROUTE PLAN WILL BE IN PLACE BEFORE MILLING AND RESURFACING ON I-94 CAN BEGIN.
3. THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS AND TRAFFIC CONTROL DEVICES MAY BE ADJUSTED TO FIT FIELD CONDITIONS AS DIRECTED BY THE ENGINEER.
4. THE I-94 ALTERNATE ROUTE WILL BE PAID FOR AT THE CONTRACT LUMP SUM PRICE FOR TRAFFIC CONTROL AND PROTECTION FOR ALTERNATE ROUTE SIGNING.

FILE NAME = D169C08-869-STAGE DETOUR NOTES.dgn	USER NAME = dwoznierski	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BISHOP FORD EXPRESSWAY (I-94) ALTERNATE ROUTE NOTES AND LEGEND		F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE = N/A	CHECKED -	REVISED -				94	10312-708W, ETC. & 1315RS-4	COOK	167	69
PLOT DATE = 2/7/2009	DATE - 2/7/2009	REVISED -	REVISED -		SCALE: N/A	SHEET NO. 1 OF 1 SHEETS	STA. TO STA.	FED. ROAD DIST. NO. [ILLINOIS] FED. AID PROJECT			
							CONTRACT NO. 60C08				