

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
804	25R.TS	CHAMPAIGN	19	16


CONTRACT NO. 70476

PUSH
BUTTON
TO
CROSS
NEIL
STREET

PUSH
BUTTON
TO
CROSS
WINDSOR
ROAD

NOTE: PEDESTRIAN PUSH-BUTTON SIGNS SHALL BE MOUNTED ABOVE THE PEDESTRIAN PUSH-BUTTONS. THE SIGNS SHALL BE BOLTED TO THE POSTS. THE SIGNS SHALL BE CONSIDERED AS INCLUDED IN THE COST OF PEDESTRIAN PUSH-BUTTONS IN ACCORDANCE WITH SECTION 888 OF THE STANDARD SPECIFICATIONS.

PEDESTRIAN PUSH-BUTTON SIGN DETAIL

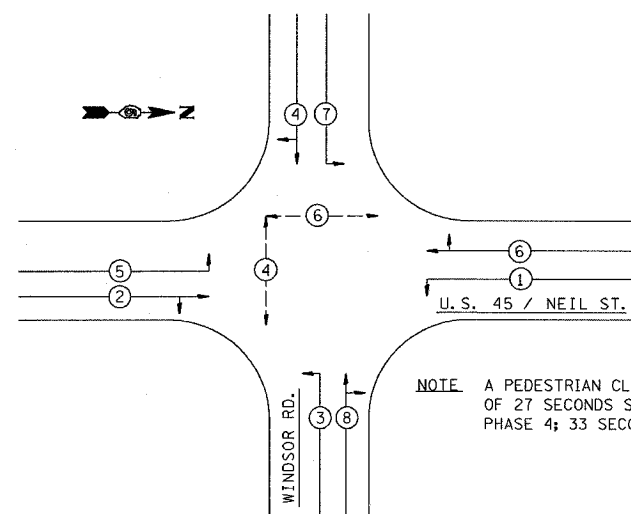

NOTE: A PEDESTRIAN CLEARANCE INTERVAL OF 27 SECONDS SHALL BE USED FOR PHASE 4; 33 SECONDS FOR PHASE 6.

PHASE DESIGNATION DIAGRAM

ITEMS TO BE RETURNED TO THE CITY OF CHAMPAIGN

ITEM	QUANTITY
CONTROLLER CABINET	1 EACH
CONTROLLER	1 EACH
TRAFFIC SIGNAL POST & BASE	5 EACH

GENERAL NOTES

- THE CONTROLLER SHALL BE SET TO MINIMUM RECALL U.S. 45/NEIL ST.
- THE FINAL LOCATIONS OF ALL TRAFFIC CONTROL ITEMS SHALL BE VERIFIED BY THE ENGINEER IN THE FIELD.
- COMBINATION MAST ARM ASSEMBLIES SHALL BE FURNISHED WITH 15 FT. LUMINAIRE TRUSS ARMS WITH A MOUNTED LUMINAIRE HEIGHT OF 40 FT.
- TIMINGS SHOWN ARE FOR INITIAL OPERATION AND MAY BE ADJUSTED TO REFLECT SITE CONDITIONS PER APPROVAL OF THE TRAFFIC OPERATIONS ENGINEER.
- SIGNAL FACES FOR THE NORTH APPROACH ARE NOTED AS "A", "B" FOR THE SOUTH APPROACH, "C" FOR THE WEST APPROACH, AND "D" FOR THE EAST APPROACH.
- ITEMS REMOVED WILL BECOME THE PROPERTY OF THE CONTRACTOR UNLESS OTHERWISE NOTED ON THE PLANS.
- ALL PAVEMENT MARKING QUANTITIES WILL BE INCLUDED IN THE DESIGN PLANS.
- A NO. 6 1/C XLP CABLE HAS BEEN FURNISHED TO PROVIDE A BONDED GROUND TO CONNECT ALL TRAFFIC SIGNAL POSTS, POLES, CABINETS, EXPOSED METAL CONDUITS AND HANDHOLES. THE BONDED GROUND SHALL BE CONNECTED AT THE SERVICE INSTALLATION.
- ALL TRAFFIC SIGNAL MAST ARM ASSEMBLIES MUST BE DESIGNED FOR THE LOADINGS SHOWN ON THE HIGHWAY STANDARDS OR THESE SIGNAL PLANS, WHICHEVER IS GREATER.
- THE INTERNALLY ILLUMINATED STREET NAME SIGNS SHALL OPERATE VIA A NO. 14 3/C SPLICED INTO THE NO. 10 1/C LUMINAIRE CABLE. SEE SPECIAL PROVISIONS.

BILL OF MATERIALS
FAP 804 (U.S. ROUTE 45) & WINDSOR RD.

ITEM	UNIT	QUANTITY
SERVICE INSTALLATION, TYPE B (MODIFIED)	EACH	1
CONDUIT IN TRENCH, 1" DIA., PVC	FOOT	146
CONDUIT IN TRENCH, 2" DIA., PVC	FOOT	36
CONDUIT IN TRENCH, 2 1/2" DIA., PVC	FOOT	49
CONDUIT SPLICE	EACH	3
HANDHOLE	EACH	1
TRENCH AND BACKFILL FOR ELECTRICAL WORK	FOOT	85
ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO. 10	FOOT	1504
FULL-ACTUATED CONTROLLER AND TYPE IV CABINET	EACH	1
GULFBOX JUNCTION REMOVAL	EACH	1
ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 2C	FOOT	392
ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 3C	FOOT	1427
ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 4C	FOOT	787
ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 5C	FOOT	1172
ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 7C	FOOT	3600
ELECTRIC CABLE IN CONDUIT, LEAD-IN, NO. 18 3 PAIR	FOOT	5178
TRAFFIC SIGNAL POST, ALUMINUM 14 FT.	EACH	1
TRAFFIC SIGNAL POST, ALUMINUM 16 FT.	EACH	3
PEDESTRIAN PUSH-BUTTON POST, GALVANIZED STEEL, TYPE I	EACH	1
STEEL MAST ARM ASSEMBLY AND POLE, 46 FT.	EACH	1
STEEL COMBINATION MAST ARM ASSEMBLY AND POLE 44 FT.	EACH	1
STEEL COMBINATION MAST ARM ASSEMBLY AND POLE 46 FT.	EACH	1
STEEL COMBINATION MAST ARM ASSEMBLY AND POLE 48 FT.	EACH	1
CONCRETE FOUNDATION, TYPE A	FOOT	3.1
CONCRETE FOUNDATION, TYPE E 36-INCH DIAMETER	FOOT	52
DRILL EXISTING HANDHOLE	EACH	12
INDUCTIVE LOOP DETECTOR	EACH	17
DETECTOR LOOP, TYPE I	FOOT	628
PEDESTRIAN PUSH-BUTTON	EACH	4
TEMPORARY TRAFFIC SIGNAL INSTALLATION	EACH	1
REMOVE ELECTRIC CABLE FROM CONDUIT	FOOT	9762
REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT	EACH	1
REMOVE EXISTING HANDHOLE	EACH	1
REMOVE EXISTING CONCRETE FOUNDATION	EACH	6
UNINTERRUPTIBLE POWER SUPPLY	EACH	1
RELOCATE EXISTING SIGNS	EACH	4
ELECTRIC CABLE IN CONDUIT, GROUNDING, NO. 6 1C	FOOT	777
ELECTRIC CABLE IN CONDUIT NO. 20 3/C, TWISTED, SHIELDED	FOOT	1002
SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, 3-SECTION, MAST ARM MOUNTED	EACH	8
SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, 5-SECTION, MAST ARM MOUNTED	EACH	4
SIGNAL HEAD, POLYCARBONATE, LED, 2-FACE, 5-SECTION, BRACKET MOUNTED	EACH	4
PEDESTRIAN SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, BRACKET MOUNTED	EACH	4
LUMINAIRE, HIGH PRESSURE SODIUM, SPECIAL	EACH	3
RELOCATE EXISTING EMERGENCY VEHICLE PRIORITY SYSTEM, COMPLETE	EACH	1
STREET NAME SIGN MAST ARM MOUNTED (INSTALL ONLY)	EACH	4
TRAFFIC SIGNAL BACKPLATE	EACH	12

GENERAL NOTES

- THE FOLLOWING SIGNAL HEADS SHALL BE WIRED IN PARALLEL AT THE MAST POLE HANDHOLE: (A3, A4), (B3, B4), (C3, C4), (D3, D4) - EACH MAST ARM MOUNTED SIGNAL HEAD SHALL HAVE ITS OWN INDIVIDUAL CABLE FROM THE MAST POLE HANDHOLE TO THE SIGNAL HEAD.
- THE ACTUAL LOCATION OF ALL SIGNAL FOUNDATIONS, HANDHOLES, AND TRAFFIC CONTROLLER WILL BE DETERMINED IN THE FIELD BY THE ENGINEER.
- POST MOUNTED SIGNALS SHALL BE INSTALLED SO THAT NO PART OF THE SIGNAL HEAD IS WITHIN 2 FT. OF THE FACE OF CURB.
- ALL MAST ARM POLES SHALL BE A MINIMUM OF 6 FT. FROM THE CENTER OF THE POLE TO THE FACE OF CURB (ON THE MAST ARM SIDE) OR AS SHOWN ON THE PLANS.
- ALIGN ADJACENT RED INDICATIONS TO SAME HEIGHT ABOVE PAVEMENT.
- THE BASE FOR A TRAFFIC SIGNAL POST SHALL BE SITUATED SUCH THAT THE HANDHOLE IS LOCATED ON A SIDE AWAY FROM A TRAVELED LANE.
- PEDESTRIAN PUSHBUTTON SIGNAL SIGNS SHALL BE MOUNTED ABOVE THE APPROPRIATE PEDESTRIAN PUSHBUTTON.
- THE ANTI-BACKUP FEATURE SHALL BE HARDWIRED ON THE BACKPANEL OF THE CONTROLLER CABINET.