F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	2021.1B-R	COOK	101	081
STA.	TO STA.			
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 62532

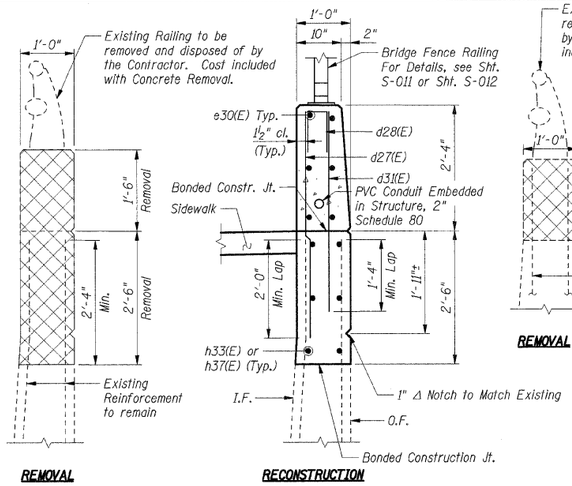

SECTION G-G

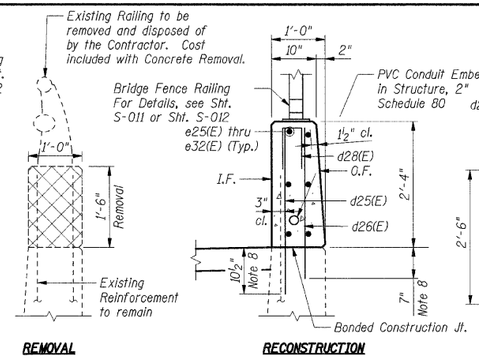

SECTION H-H

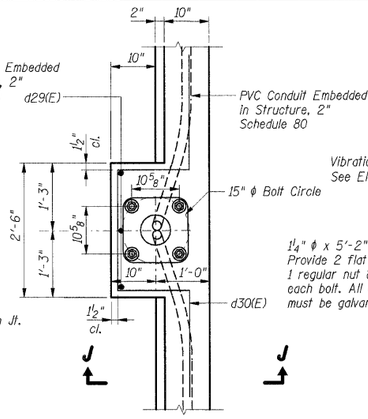

LIGHT & COMBINATION POLE FOUNDATION PLAN

(1 Thus Light Pole Foundation)
(1 Thus Combination Pole Foundation)

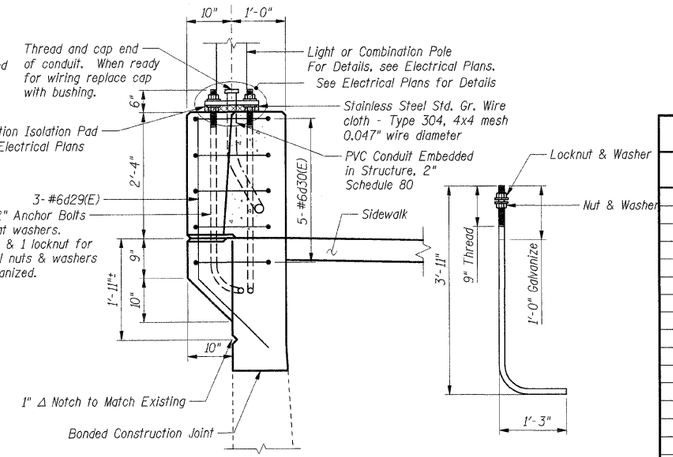

SECTION J-J

1¼" ANCHOR BOLT

(ASTM F 1554 Grade 105)

* Dimensions related to existing conditions have been developed from record plan data and should be field verified according to Note 4 on Sht. S-002.

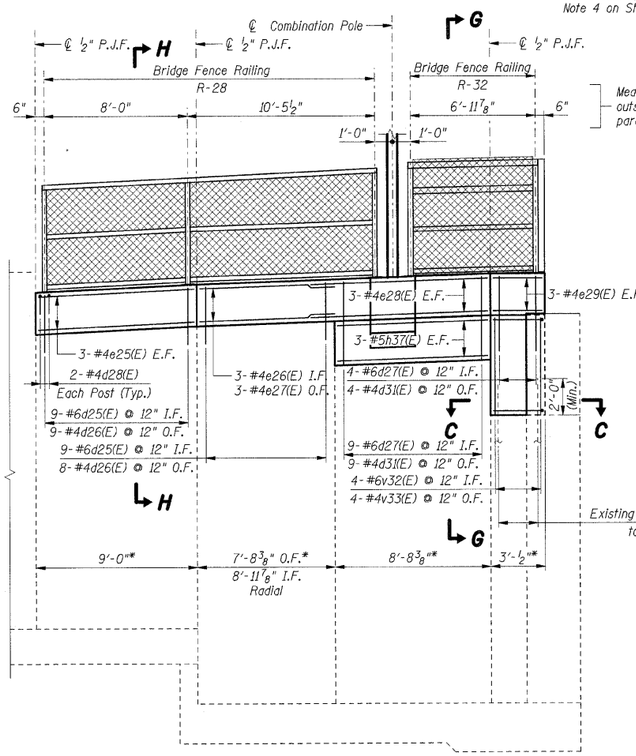

DEVELOPED ELEVATION SOUTHWEST RETAINING WALL

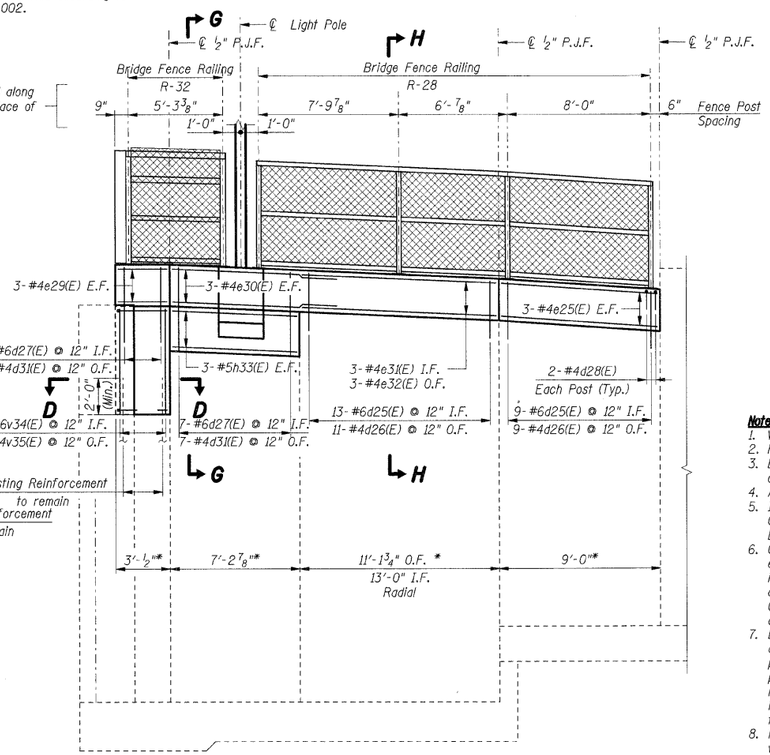

DEVELOPED ELEVATION NORTHWEST RETAINING WALL



Bar d30(E)



Bars h29(E) & h30(E)



Bars h31(E) & h32(E)



Bar v26(E)



Bar d29(E)



Bar v30(E)



Bar h27(E)

Bar	A	B
e26(E)	6'-9"	8'-6"
e27(E)	6'-4"	8'-0"
e31(E)	6'-9"	12'-5"
e32(E)	6'-4"	11'-7"



Bars e26(E), e27(E), e31(E) & e32(E)



Bars d28(E)

LAP LENGTHS	
Bar Size	Min. Lap
#4	1'-11"
#5	1'-8"
#6	2'-0"

Notes:

1. Work this sheet with Sht. S-016.
2. Reinforcement bars designated (E) shall be epoxy coated.
3. Bars indicated thus 30 x 2-#5 etc. indicates 30 lines of bars with 2 lengths per line.
4. All edges shall have standard ¾" chamfers except as noted.
5. I.F. indicates Inside Face
   O.F. indicates Outside Face
   B.F. indicates Back Face
6. Quantities indicated with a double asterisk (**) are estimated quantities to be determined by the Engineer in the field. Adjustment to the quantities shall not be cause for additional compensation; however the Contractor will be paid for the quantity of work performed at the unit price bid for the work.
7. Existing reinforcement bars to remain shall be cleaned and incorporated into new construction with a minimum projection length as shown. Bars with insufficient projection or with 10% or more section loss shall be removed flush to the concrete removal line and replaced in kind by drilling and grouting new bars of equivalent size, the cost of which is included with Concrete Removal.
8. Reinforcement bars shall be epoxy grouted in accordance with Section 584 of the Standard Specifications. The grout and method of application shall be approved by the Department. Cost included with Reinforcement Bars, Epoxy Coated.

BAR LIST

Bar	No.	Size	Length	Shape
d25(E)	40	#6	3'-1"	
d26(E)	37	#4	2'-9"	
d27(E)	24	#6	4'-4"	
d28(E)	22	#4	2'-6"	
d29(E)	6	#6	4'-9"	
d30(E)	10	#6	8'-11"	
d31(E)	24	#4	3'-8"	
e25(E)	12	#4	8'-8"	
e26(E)	3	#4	8'-6"	
e27(E)	3	#4	8'-0"	
e28(E)	6	#4	10'-5"	
e29(E)	12	#4	2'-9"	
e30(E)	6	#4	9'-0"	
e31(E)	3	#4	12'-5"	
e32(E)	3	#4	11'-7"	
h25(E)	8	#5	44'-4"	
h26(E)	4	#6	44'-6"	
h27(E)	4	#5	2'-3"	
h28(E)	4	#6	8'-4"	
h29(E)	6	#5	5'-2"	
h30(E)	6	#5	5'-11"	
h31(E)	6	#5	5'-0"	
h32(E)	6	#5	5'-4"	
h33(E)	6	#5	7'-0"	
h35(E)	4	#5	36'-1"	
h36(E)	4	#5	11'-1"	
h37(E)	6	#5	8'-5"	
v25(E)	16	#4	3'-5"	
v26(E)	69	#4	3'-3"	
v27(E)	69	#4	5'-2"	
v28(E)	32	#4	5'-5"	
v29(E)	69	#5	3'-2"	
v30(E)	69	#4	3'-4"	
v32(E)	4	#6	5'-6"	
v33(E)	4	#4	5'-6"	
v34(E)	4	#6	5'-11"	
v35(E)	4	#4	5'-11"	

BILL OF MATERIAL

Item	Unit	Total
Porous Granular Embankment, Special	Cu Yd	90
Concrete Removal	Cu Yd	18.1
Structure Excavation	Cu Yd	90
Concrete Structures	Cu Yd	21.6
Reinforcement Bars, Epoxy Coated	lbs	3,080
Bar Splicers	Each	69
Concrete Sealer	Sq Ft	167
Structural Repair of Concrete, Depth Equal to or Less Than 5" **	Sq Ft	341
Epoxy Crack Injection**	Ft	46

LEGEND

Concrete Removal

SHT. S-017

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
F.A.I. ROUTE 57 (INTERSTATE 57)
111TH STREET BRIDGE DECK REPLACEMENT
111th STREET OVER I-57
SN 016-0989 STA. 556+99.89
COOK COUNTY

WEST ABUTMENT
DETAILS AND BILL OF MATERIAL

DRAWN BY: TMH
CHECKED BY: JLR
DATE: 01/16/09

TENG

TENG & ASSOCIATES, INC.
ENGINEERS/ARCHITECTS/PLANNERS
205 N. MICHIGAN AVE., CHICAGO, IL 60601
TELEPHONE: 312.616.0000

..\BRBORDER.DGN, ..\ABTGGN85.DGN, ..\ABTGGN85.DGN, ..\ABTGGN85.DGN, ..\ABTGGN85.DGN, ..\ABTGGN85.DGN
M6-2009, 14:52:05 I:\DOCUMENT\053086\STRUCT\DGN\ABTGGNKP.DGN RITCHUL
pen tables: N/A color tables: K:\STANDARDS\TENG\DATA\COLORTABLE.TBL