



# TEMPORARY DITCH CHECKS

PLACEMENT OF TEMPORARY  
DITCH CHECK IN DRAINAGE WAY

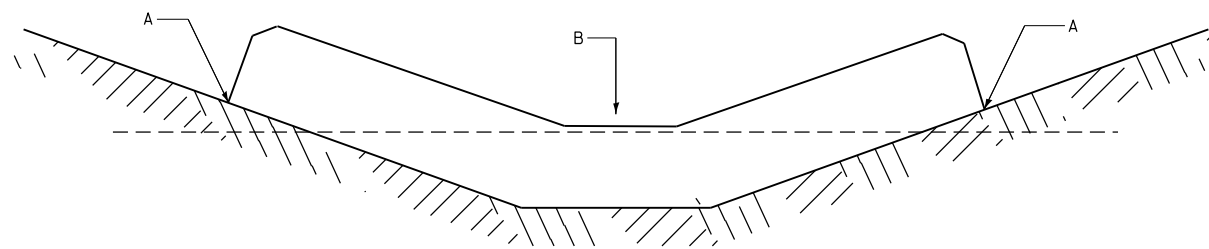

POINTS A SHOULD BE HIGHER THAN POINT B

SPACING BETWEEN TEMPORARY DITCH CHECKS

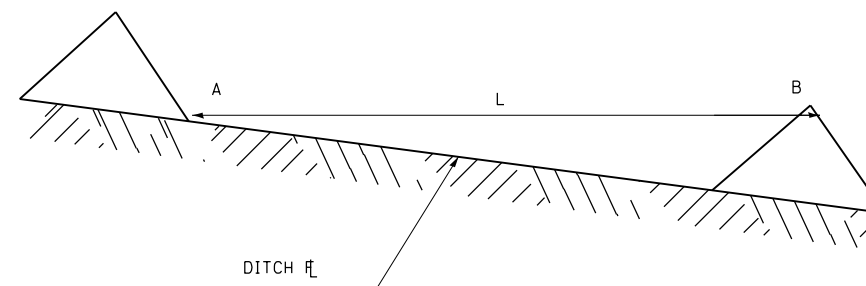

L = THE DISTANCE SUCH THAT POINTS  
A AND B ARE OF EQUAL ELEVATION

B = THE LOW POINT  
IN CENTER OF CHECK

REVISIONS

DRAWN	9-01-99
REVISED	10-3-01
RESIZED	5-8-08
REVISED	05-04-10

STD. 9-108

FILE NAME = D978231-sht-detail.dgn  
 MODEL = Default  
 PLOT DRIVER = 100T\_PDF.plt



USER NAME = twalker	DESIGNED -	REVISED -
FILE NAME = D978231-sht-detail.dgn	DRAWN -	REVISED -
PLOT SCALE = 40.0000' / in.	CHECKED -	REVISED -
PLOT DATE = 7/8/2014	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**TEMPORARY DITCH CHECK DETAIL**

SCALE: NONE    SHEET NO. 1 OF 1 SHEETS    STA.    TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
877	100B-1	WHITE	54	19
CONTRACT NO. 78231				
ILLINOIS FED. AID PROJECT				