
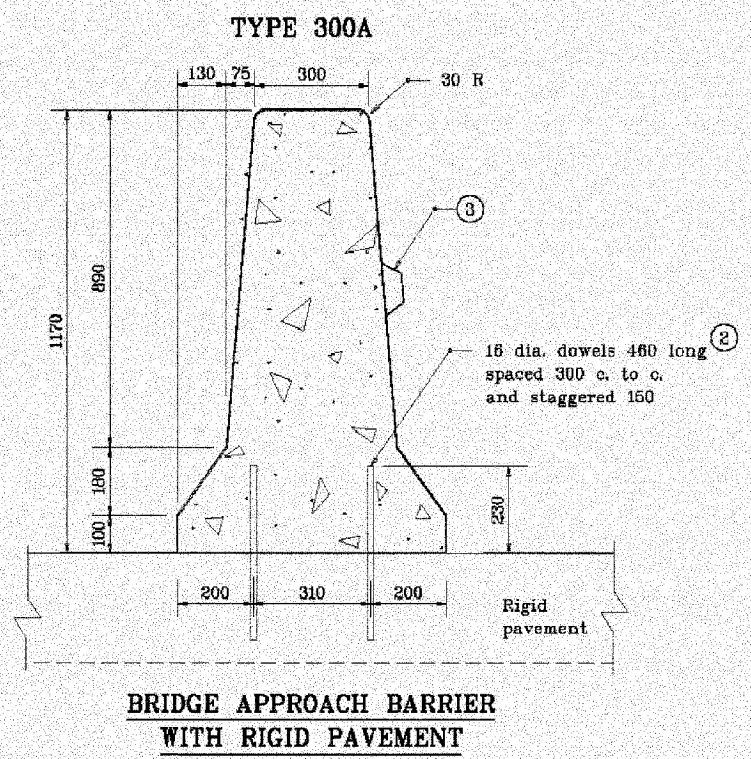
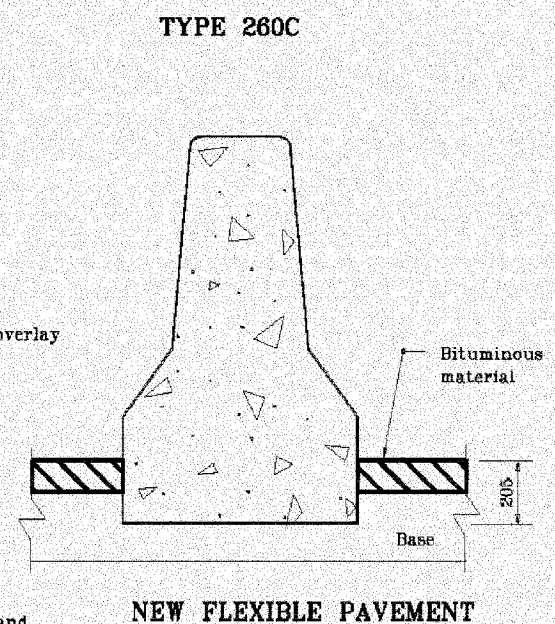
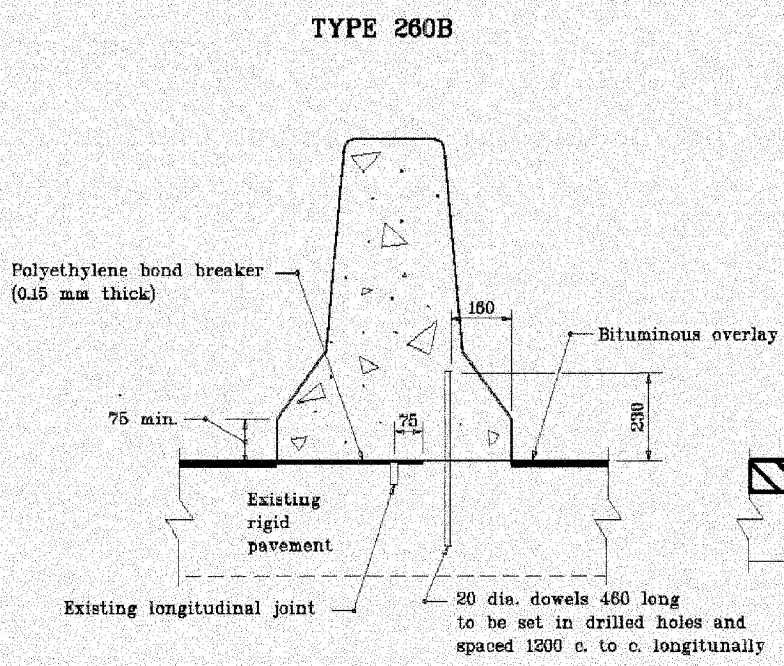


602-R-388d
2 of 5

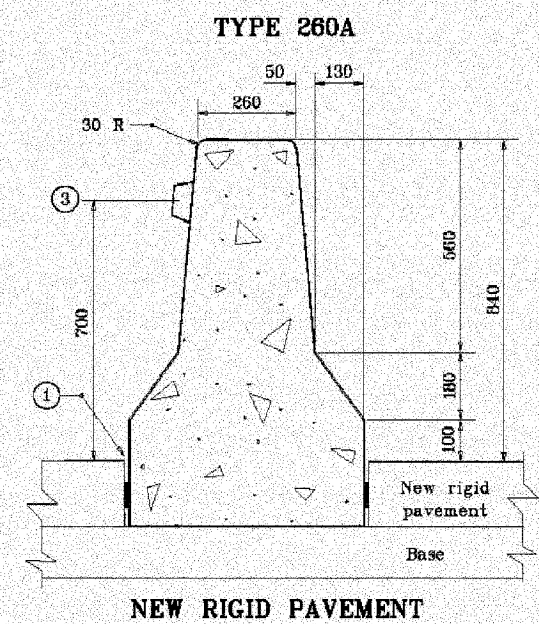

NEW BITUMINOUS OVERLAY OVER EXISTING RIGID PAVEMENT

NOTES:

- ① If concrete pavement or concrete shoulder abuts the concrete median barrier, a 6 mm preformed joint filler shall be placed between the barrier and the pavement.
- ② Dowels shall be either drilled and grouted or driven on existing rigid pavement.
- ③ Reflectors on concrete median barrier shall be spaced at a minimum of 12 m and shall be centered 700 above the surface of adjacent pavement or shoulder on both sides if traffic is on both sides.

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION
CONCRETE MEDIAN BARRIER
11/15/00