
WITH INTERSECTION TRAFFIC SIGNALS


WITH NEAR-SIDE TRAFFIC SIGNALS

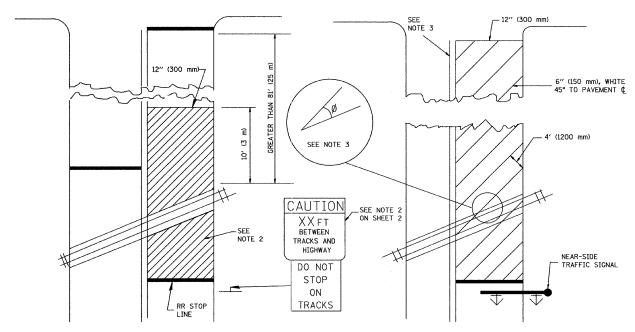

NOTES

- PAVEMENT MARKINGS TO BE INSTALLED ONLY ON APPROACHES TO INTERSECTIONS CONTROLLED BY TRAFFIC SIGNALS
 WHICH ARE INTERCONNECTED WITH THE RAILROAD WARNING SIGNALS.
- 2. WHERE NEAR-SIDE TRAFFIC SIGNALS ARE USED, THE PAVEMENT MARKINGS EXTENDS TO THE INTERSECTION.
- 3. WHERE THE ANGLE BETWEEN THE DIAGONAL STRIFES AND THE TRACK (Ø) WOULD BE LESS THAN APPROXIMATELY 20°, THE STRIPES SHOULD BE SLOPED IN THE OPPOSITE DIRECTION FROM THAT SHOWN.

WITH NONSIGNALIZED INTERSECTION 81' (25 m) OR LESS TO CLOSEST RAIL

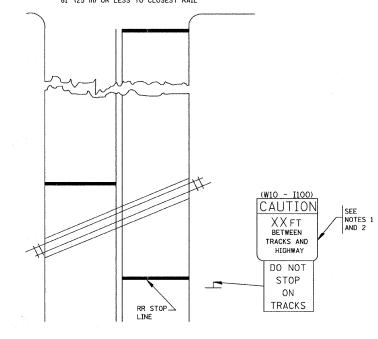

NOTE

SCALE:

- 1. DISTANCE TO BE SHOWN ON SIGN MEASURED FROM A POINT 6 FEET (1.8 m) FROM THE RAIL CLOSEST TO THE INTERSECTION TO THE STOP LINE OR CROSSWALK, WHICHEVER IS CLOSEST, ROUNDED DOWN TO THE NEAREST 5 FEET (1.5 m), WHERE THERE IS NO STOP LINE, MEASURE TO POINT WHERE THE DRIVER HAS A VIEW OF APPROACHING TRAFFIC.
- 2. THE CLEARANCE SIGN IS ALSO TO BE USED AS AN INTERIM MEASURE AT LOCATIONS WITH INTERCONNECTED INTERSECTION TRAFFIC SIGNALS WHERE IT IS PLANNED TO CHANGE THEM TO NEAR-SIDE SIGNALS AT A FUTURE TIME. IN THIS CASE, THE DISTANCE TO BE SHOWN ON THE SIGN IS MEASURED FROM THE EDGE OF THE STRIPED-OUT AREA INSTEAD OF 6-FEET FROM THE RAIL. THE SIGN IS OF THE NEAR SIDE SIGNALS ARE INSTALLED AND THE PAVEMENT MARKINGS EXTEND TO THE INSTALLED AND THE PAVEMENT MARKINGS EXTEND TO THE INTERSECTION.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

COUNTY TOTAL SHEET NO.
COOK 18 17

CONTRACT NO. 63314

FILE NAME = 06173_01-DTLS-08 - TC-23	USER NAME = gaglianobt	DESIGNED —	REVISED 01-01-07
		CHECKED	REVISED —
	PLOT SCALE = 50.000 '/ IN.	DRAWN	REVISED
	PLOT DATE = 1/4/2008	CHECKED	BEVISED

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TYPICAL SUPPLEMENTAL SIGNING AND PAVEMENT MARKING TREATMENT FOR RAILROAD CROSSINGS		SECTION
		09-00225-00-RS
		TC-23
CHEET NO 17 OF 10 CHEETS CTA TO CTA	FFD 00	AD DIOT NO. 4 THE MICHOLD