
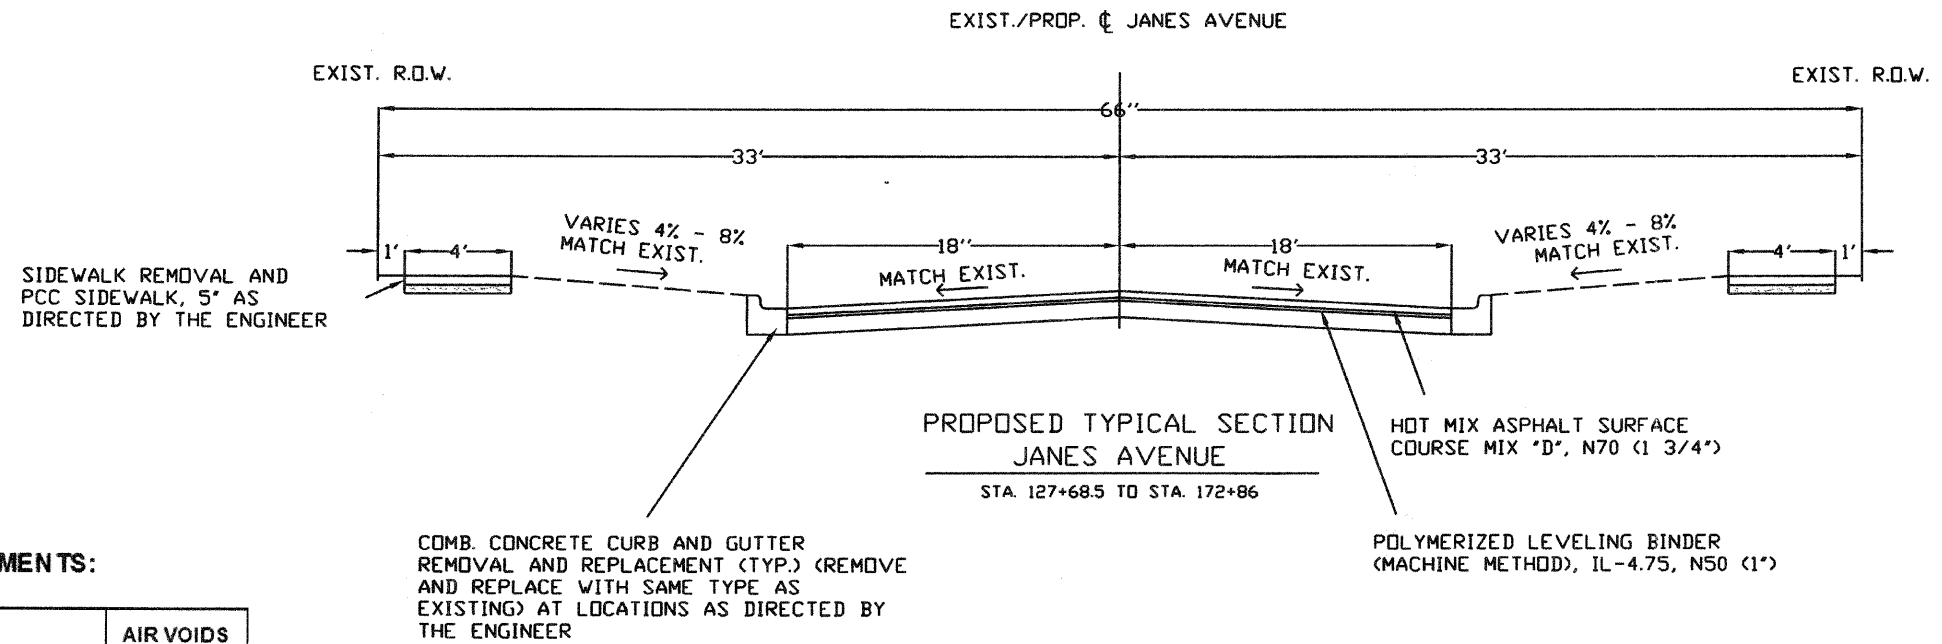


CONTRACT NO. 63347

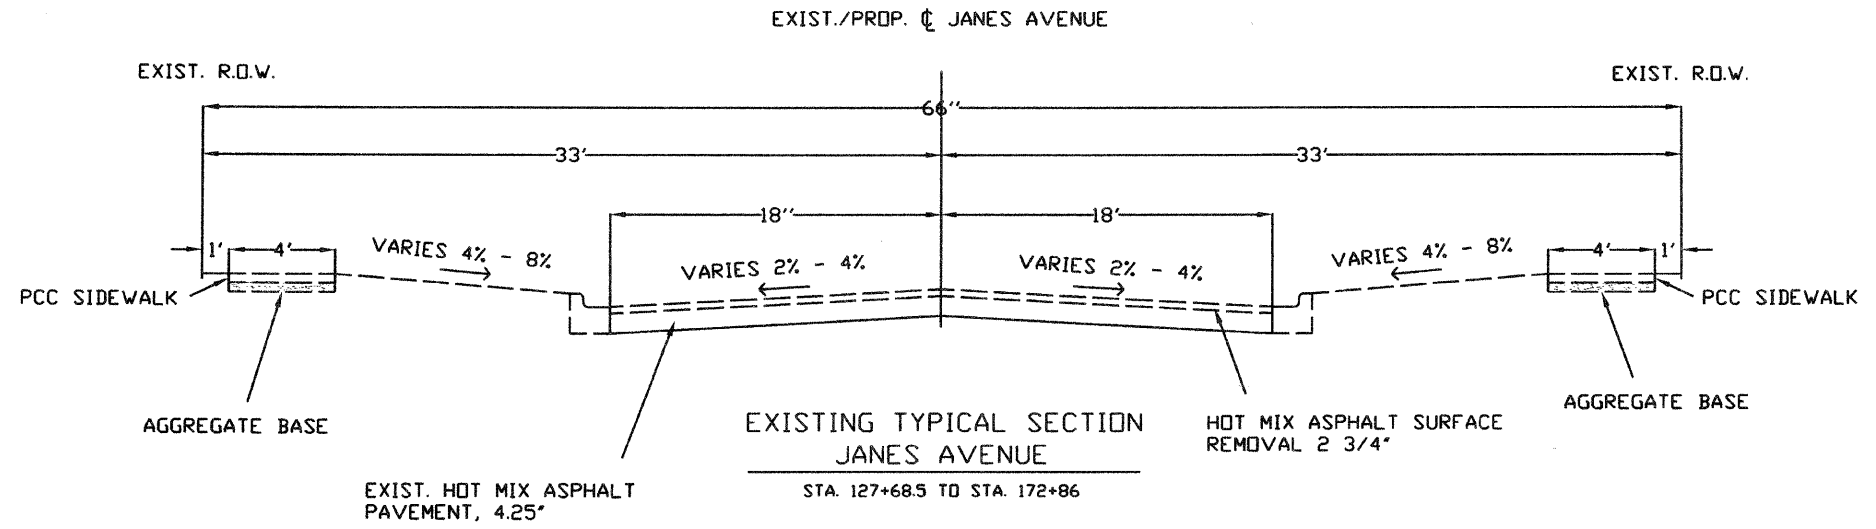

CONTRACTOR SHALL MILL BEFORE PATCHING

HOT-MIX ASPHALT MIXTURE REQUIREMENTS:

MIXTURE TYPE	AIR VOIDS @Ndes
ROADWAY HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70 (IL 9.5mm) 1 3/4"	4% @ 70 Gyr.
POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50 1"	4% @ 50 Gyr.
PATCHING CLASS D PATCHES (HMA BINDER IL-19mm) 5"	4% @ 70 Gyr.

THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LBS/SQ YD/M.

THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 70 -22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64 -22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS.

FOR "PERCENT OF RAP" SEE DISTRICT ONE SPECIAL PROVISIONS.

CROSS SECTIONS ARE NOT TO SCALE

VILLAGE OF WOODRIDGE PUBLIC WORKS
 1 Plaza Drive, Woodridge IL 60517 (630) 719-4753

**JANES AVENUE
 REHABILITATION PROJECT**

TYPICAL CROSS SECTIONS

DRAWN BY: AF CHECKED BY: SM