


BREAK AWAY GROUND MOUNT SIGNAGE LAYOUT VERMILION & CHAMPAIGN COUNTIES

Location No.	Structure No.	Mounting OFFSET to the rear edge of sign	Mounting HEIGHT to the bottom edge of sign	Sign Size W x h ft	Sign Width W ft	0.2W a ft	0.6W b ft	0.2W c ft	Clear Height CH ft	Sign Height h ft	leg 1 l1 ft	leg 2 l2 ft	main post 1 m1 ft	main post 2 m2 ft	stub post s ft	Total post 1 t1 ft	Total post 2 t2 ft	Post Type	Nominal wt. lbs/ft	Total Weight (both posts) lbs	Total Concrete cu. yds.
GM-1	5 C 092 S001 L027.48	Center between back of guardrail and chain link fence	7 feet from the top of curb	9.0' x 3.0'	9.0	1.8	5.4	1.8	7.0	3.0	7.0	7.0	10.0	10.0	2.5	12.5	12.5	W6 x 15	15.0	375.0	1.40
GM-2	5 C 092 S001 L027.44	6 feet from the back of curb	10 feet from the top of curb	14.0' x 10.0'	14.0	2.8	8.4	2.8	10.5	10.0	10.0	10.5	20.0	20.5	3.0	23.0	23.5	W10 x 26	26.0	1200.0	2.54
GM-3	5 C 092 S001 L027.25	6 feet from the back of curb	10 feet from the top of curb	12.5' x 7.5'	12.5	2.5	7.5	2.5	10.5	7.5	10.0	10.5	17.5	18.0	3.0	20.5	21.0	W10 x 22	22.0	913.0	2.36
GM-4	5 C 092 S001 R027.23	4 feet from the back of curb	10 feet from the top of curb	10.0' x 5.0'	10.0	2.0	6.0	2.0	10.0	5.0	10.0	10.0	15.0	15.0	2.5	17.5	17.5	W6 x 15	15.0	525.0	1.40
GM-5	5 C 092 S001 R027.03	4 feet from the back of curb	10 feet from the top of curb	14.0' x 7.5'	14.0	2.8	8.4	2.8	10.5	7.5	10.0	10.5	17.5	18.0	3.0	20.5	21.0	W10 x 22	22.0	913.0	2.36
GM-6	5 C 092 I074 R209.90	7.5' from E.O.S. = center fdn's around 30" pipe	8 feet from white stripe / edge of pavement	16.5' x 13.0'	16.5	3.3	9.9	3.3	7.0	13.0	7.0	2.75	20.0	15.75	3.5	23.5	19.25	W14 x 38	38.0	1624.5	4.18
GM-7	5 C 092 I074 L213.60	4 feet from the back of curb	7 feet from the top of curb	12.5' x 5.5'	12.5	2.5	7.5	2.5	7.5	5.5	7.5	7.0	13.0	12.5	2.5	15.5	15.0	W6 x 15	15.0	457.5	1.40
GM-8	5 C 092 I074 R213.70	4 feet from the back of curb	7 feet from the top of curb	13.5' x 5.5'	13.5	2.7	8.1	2.7	7.5	5.5	7.5	7.0	13.0	12.5	2.5	15.5	15.0	W6 x 15	15.0	457.5	1.40
GM-9	5 C 092 I074 L213.79	4 feet from edge of shoulder	7 feet from white stripe / edge of pavement	12.0' x 9.5'	12.0	2.4	7.2	2.4	10.0	9.5	8.5	10.0	18.0	19.5	3.0	21.0	22.5	W10 x 22	22.0	957.0	2.36
GM-10	5 C 010 I074 R000.05	4 feet from the back of curb to the left edge of sign	7 feet above the top of curb	14.0' x 11.0'	14.0	2.8	8.4	2.8	7.5	11.0	7.0	7.5	18.0	18.5	3.0	21.0	21.5	W10 x 26	26.0	1105.0	2.54
GM-11	5 C 010 I074 R000.13	6 feet from the back of curb to the left edge of sign	10 feet above the top of curb	14.5' x 5.5'	14.5	2.9	8.7	2.9	10.5	5.5	10.0	10.5	15.5	16.0	2.5	18.0	18.5	W8 x 18	18.0	657.0	1.40
GM-12	5 C 010 I074 R000.19	4 feet from the back of curb to the left edge of sign	10 feet above the top of curb	11.0' x 5.5'	11.0	2.2	6.6	2.2	10.5	5.5	10.5	10.5	16.0	16.0	2.5	18.5	18.5	W6 x 15	15.0	555.0	1.40
GM-13	5 C 010 I074 L000.29	6 feet from the back of curb to the left edge of sign	7 feet above the top of curb	13.5' x 11.0'	13.5	2.7	8.1	2.7	10.0	11.0	7.5	10.0	18.5	21.0	3.0	21.5	24.0	W10 x 26	26.0	1183.0	2.54

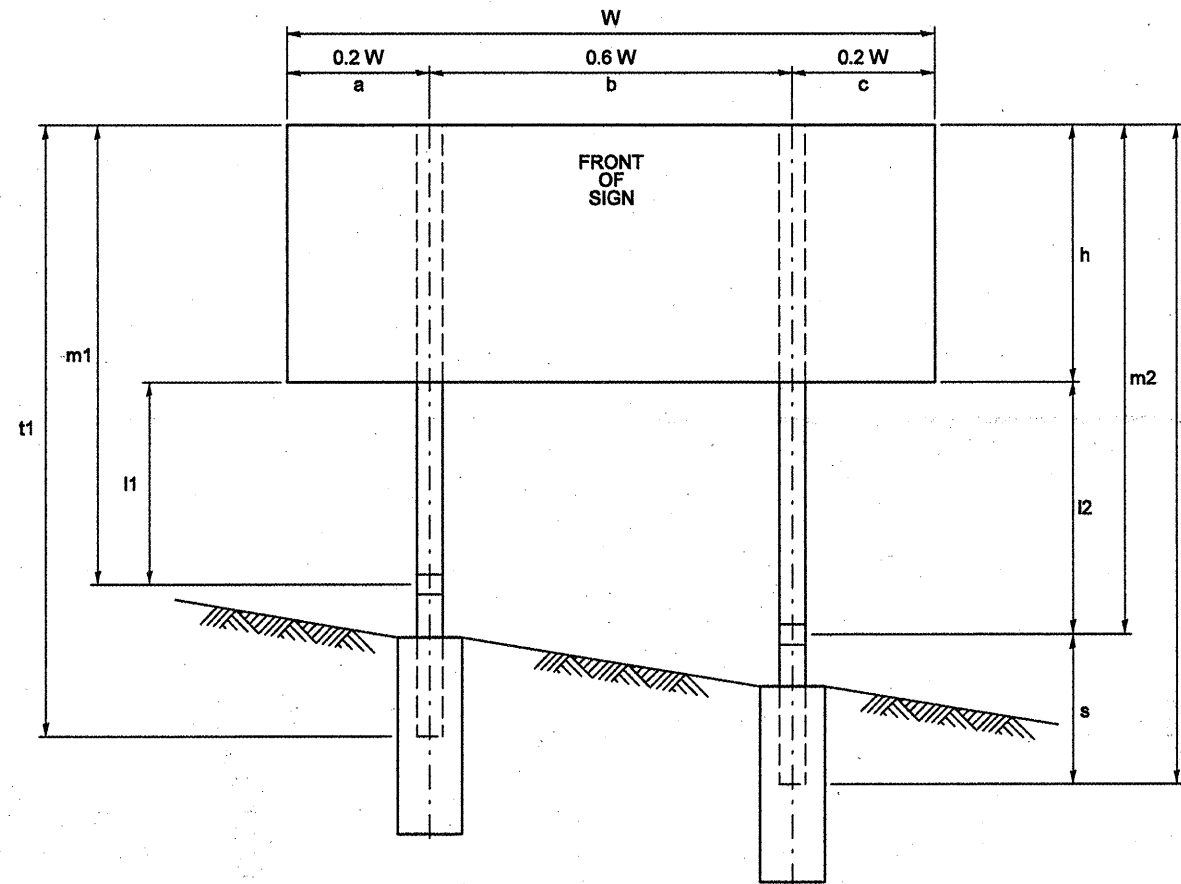

CH = Clear Height = the greater of l1 or l2

FILE NAME =	USER NAME = craige	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BREAK AWAY GROUND MOUNT SIGNAGE LAYOUT VERMILION & CHAMPAIGN COUNTIES	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
es:\pw_work\pwsdot\craige\48180151\054618	0-shr-schedule.dgn	DRAWN -	REVISED -			• 0-5 OSS REPL 2010-46	Various	77	64	
PLOT SCALE = 48.0000' / IN.	CHECKED -	REVISED -	• Various			CONTRACT NO. 46110				
PLOT DATE = 2/4/2010	DATE -	REVISED -	ILLINOIS FED. AID PROJECT							
					SCALE:	SHEET NO. OF SHEETS STA. TO STA.				