


DETECTOR LOOP INSTALLED IN TRENCH

INSTALLATION IS TO BE DONE IN CONFORMANCE WITH THE REQUIREMENTS OF THE PLANS AND SECTION 886 OF THE STANDARD SPECIFICATIONS WITH THE FOLLOWING EXCEPTIONS:

1. SLOTS ARE TO BE TRENCHED INSTEAD OF SAWED.
2. THIS WORK SHALL NOT BE PAID FOR SEPERATELY BUT SHALL BE INCLUDED IN THE COST OF "TEMPORARY BRIDGE TRAFFIC SIGNALS (STATE FURNISHED CONTROLLER)" - 1 EACH.
3. THE SIZE SHALL BE MEASURED AS 6' X 6'.

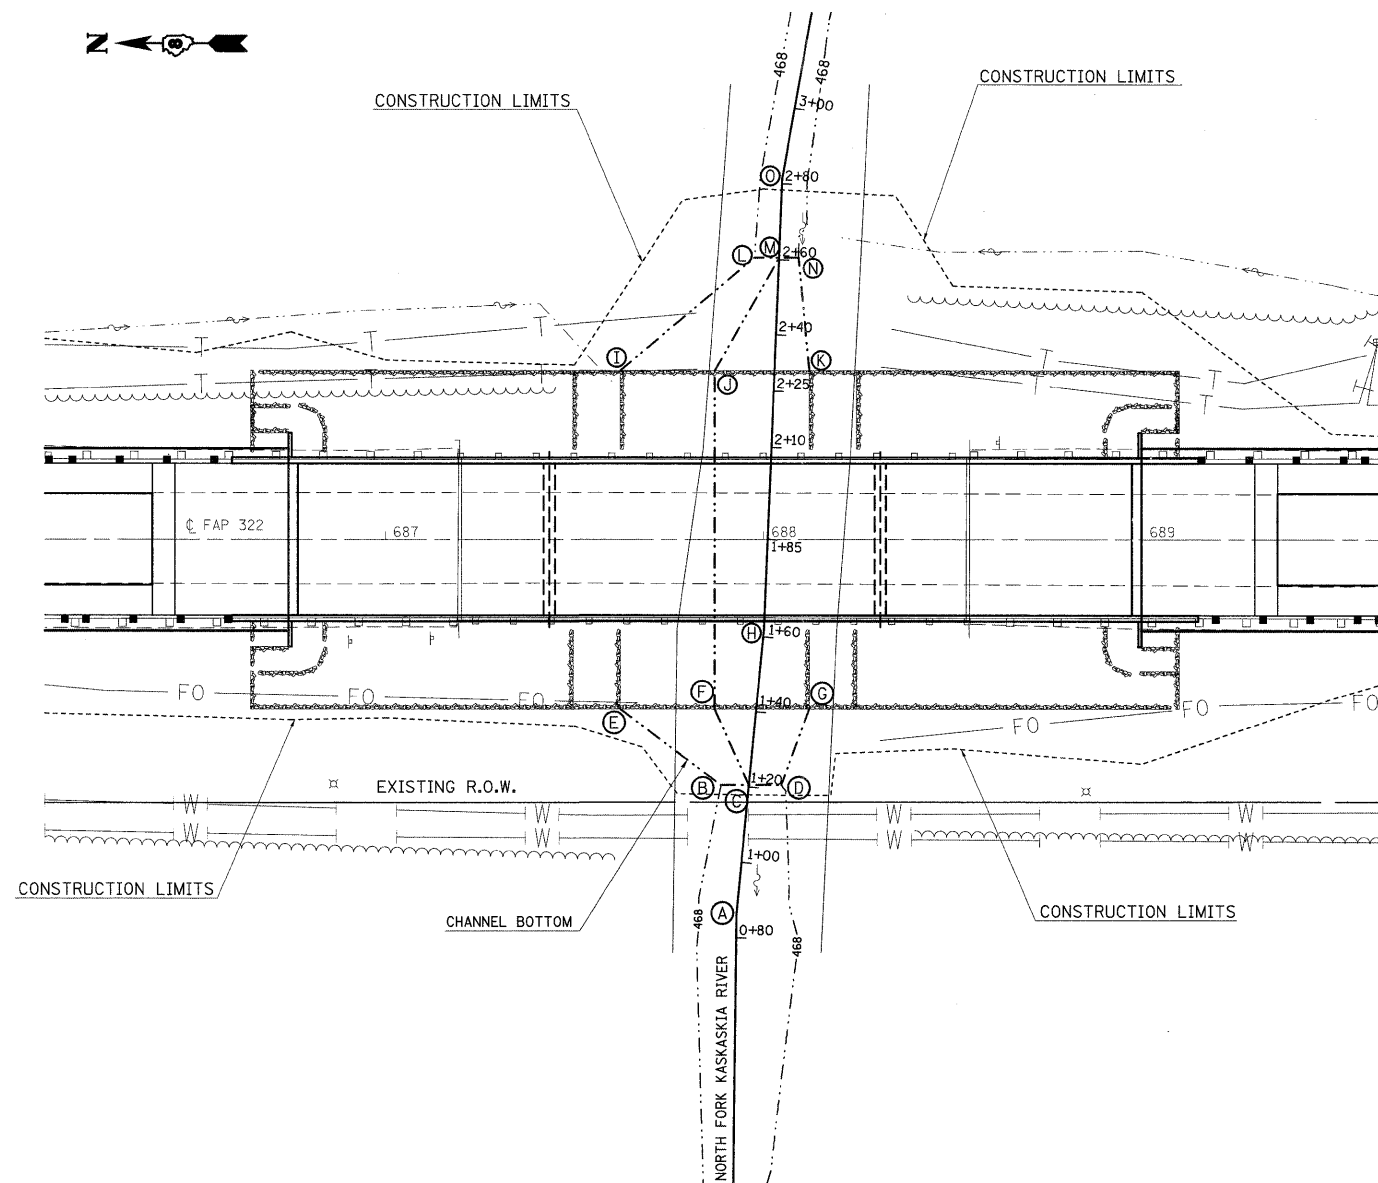

LOCATION	ROADWAY		CHANNEL	
	STA.	OFFSET	STA.	OFFSET
A	687+92.85	99.13	0+86.18	0
B	687+88.77	64.94	1+19.82	7.34
C	687+96.14	64.94	1+20.53	0
D	688+04.71	64.94	1+21.35	8.53
E	687+62.10	44.77	1+37.35	35.81
F	687+87.10	44.77	1+39.74	10.92
G	688+12.10	44.77	1+42.13	13.96
H	688+00.11	23.54	1+62.12	0
I	687+62.10	44.77	2+28.87	40.73
J	687+87.10	44.77	2+29.86	15.75
K	688+12.10	44.77	2+30.85	9.23
L	687+97.49	74.79	2+60.26	6.56
M	688+04.05	74.79	2+60.52	0
N	688+09.21	74.79	2+60.72	5.16
O	688+04.87	95.43	2+81.18	0

