



STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

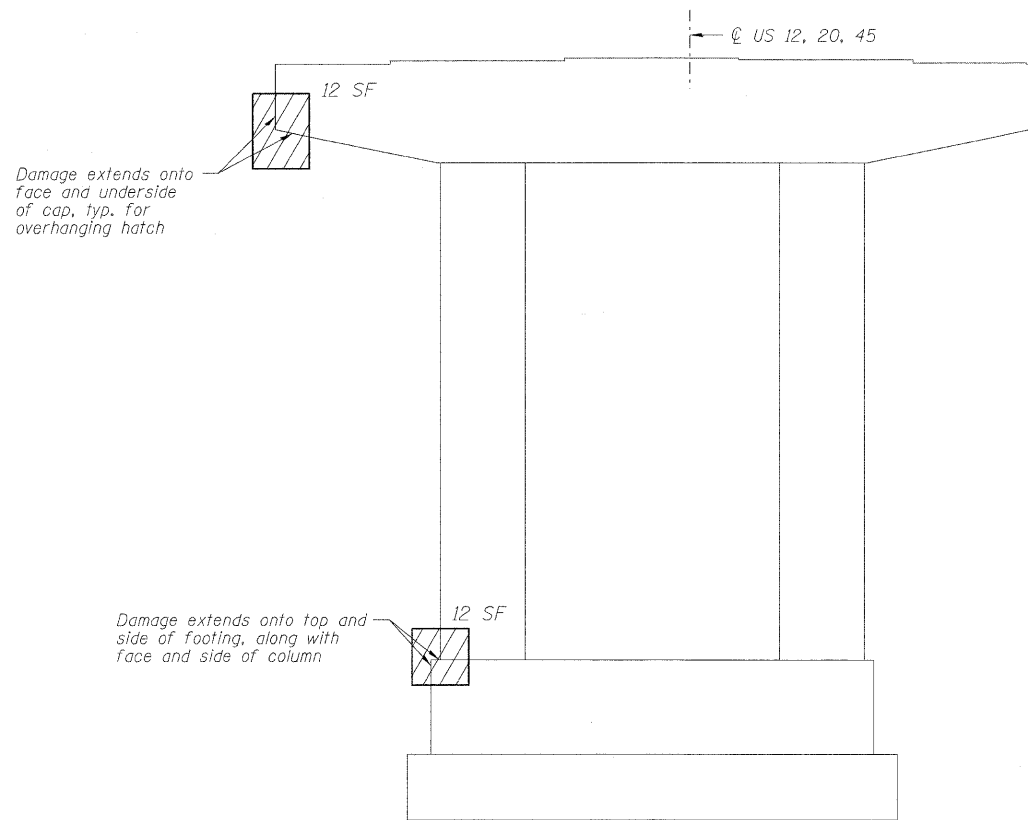

**PIER 7 SOUTH FACE (Looking North)**

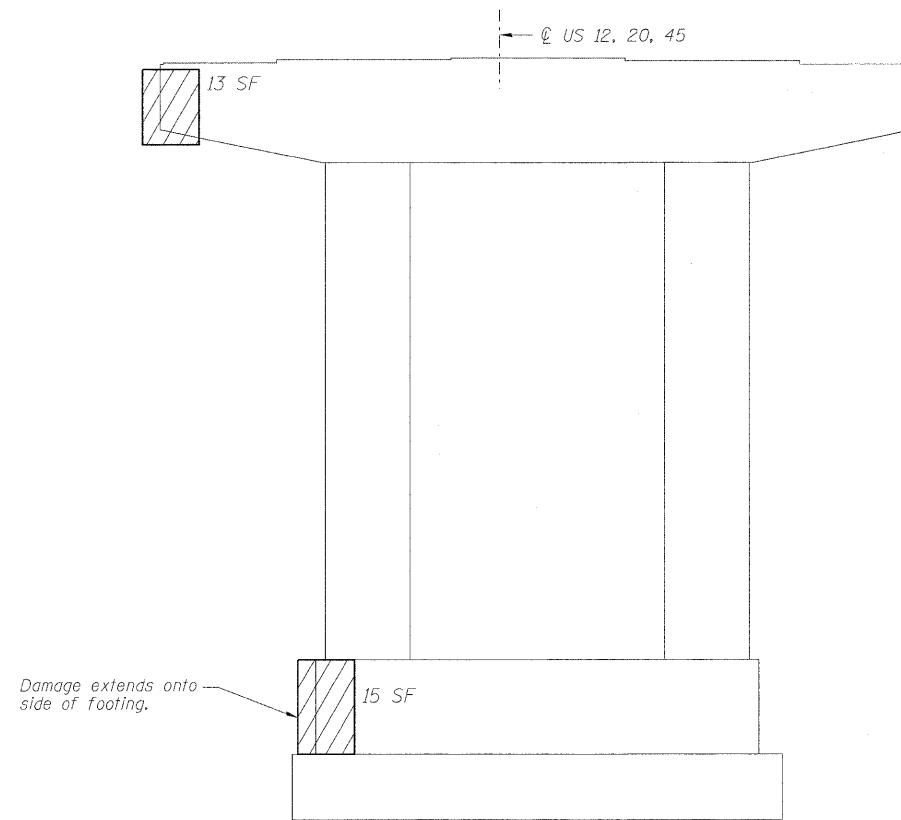

**PIER 7 NORTH FACE (Looking South)**

**ELEVATION - REMOVAL AND REPAIR**

**LEGEND**

Structural Repair of Concrete (Depth <= 5")

**BILL OF MATERIAL**

Item	Unit	Total
Structural Repair of Concrete (Depth less than equal to 5")	Sq. Ft.	52

The quantities shown are for estimating purposes only. The area to be repaired will be determined by the Engineer at the time of Construction. Actual repair locations shall be shown on the as-built plans.

**NOTES**

Temporary Shoring and Cribbing required to complete bearing replacement and/or Structural Repair of Concrete (Depth Equal to or Less Than 5 inches) shall not be paid for separately but shall be included in the cost of Jack and Remove Existing Bearings. When doing the pier repair and bearing replacement at the same time, the structure shall not be jacked up from the pier, the weight must be taken off of the pier, in the area of the repair of the pier. Concrete must be cured to minimum strength for the repair before bearing can be replaced and weight put back on the pier, according to special provisions.

DESIGNED	SLV
CHECKED	DJB
DRAWN	SLV
CHECKED	DJB

**LONGO, INC.**  
CONSULTING ENGINEERS  
1560 WALL ST, SUITE 222  
NAPERVILLE, ILLINOIS 60563 PH: (630) 577-9100

**PIER 7 REPAIR  
STRUCTURE NO. 016-2406**

SHEET NO. 16 OF 18 SHEETS	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	330	462 X-B-I-1	COOK	41	32
D-91-228-10			CONTRACT NO. 60J38		
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT					