
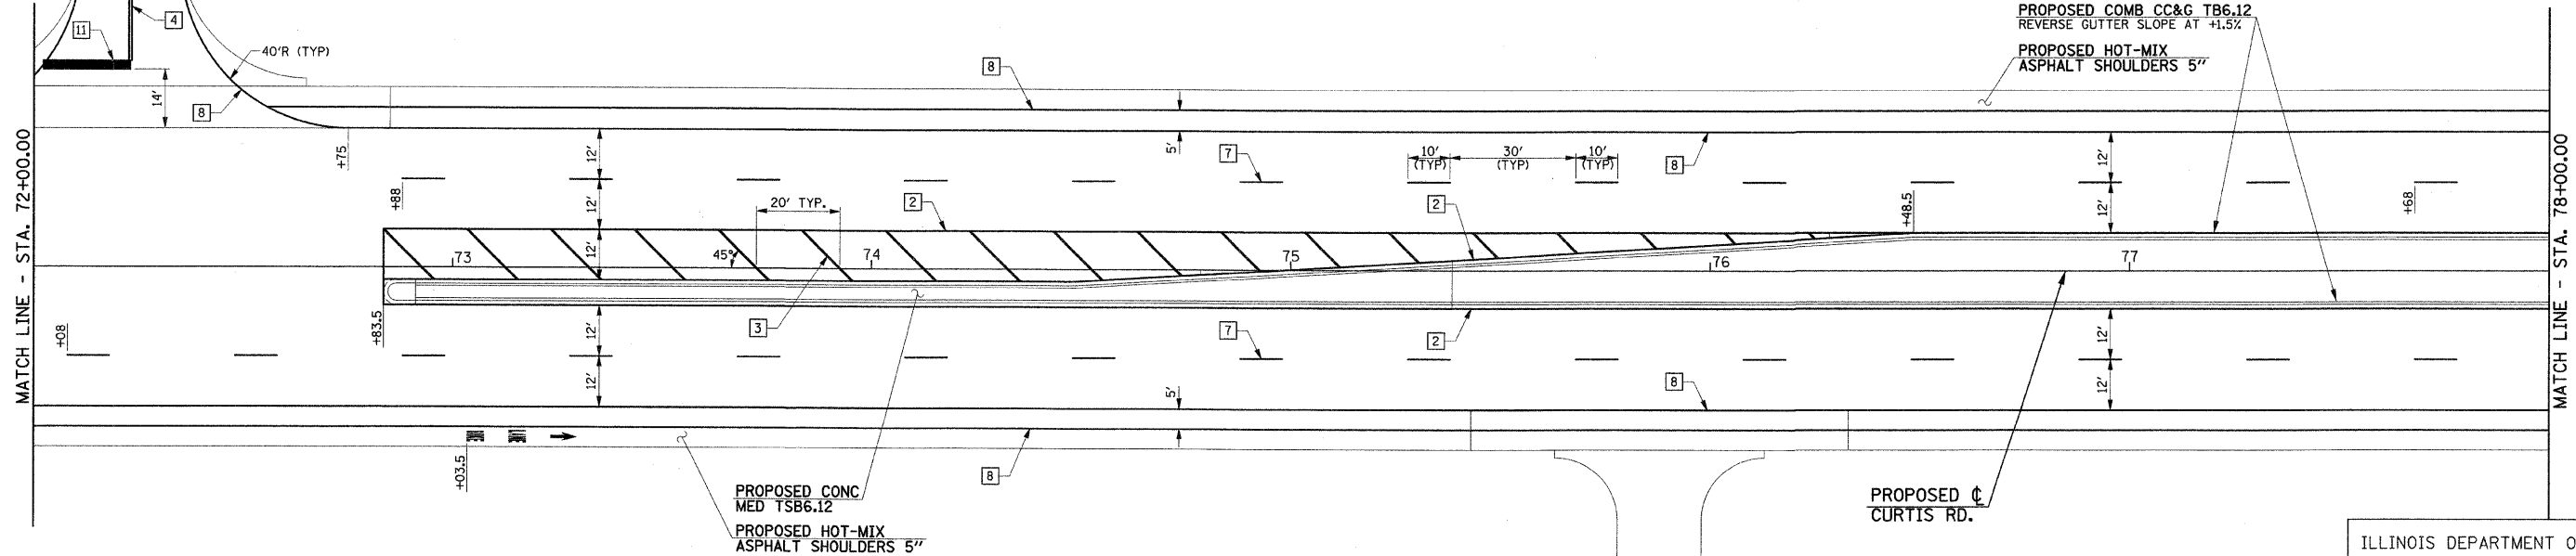


PROPOSED  $\phi$   
CURTIS RD.  
CURVE DATA  
P.I. STA. 67+00.29  
 $\Delta = 4^{\circ}38'59''$   
 $D = 0^{\circ}53'13''$   
 $T = 262.27'$   
 $R = 6460.00'$   
 $L = 524.24'$   
 $E = 5.32'$   
P.R.C. STA. 64+38.03  
P.T. STA. 69+62.27  
S.E. = NONE

TYPICAL PAVEMENT MARKING LEGEND			
1	4" SKIP-DASH (YELLOW)	8	4" SOLID (WHITE)
2	4" SOLID (YELLOW)	9	12" DIAGONAL (WHITE)
3	12" DIAGONAL (YELLOW)	10	6" CROSSWALK (WHITE)
4	4" DOUBLE YELLOW (NARROW)	11	24" STOP BAR (WHITE)
5	4" DOUBLE YELLOW (WIDE) N/A	12	8" SOLID (WHITE) N/A
6	6" DIAGONAL (YELLOW) N/A	13	4" LANE LINE EXTENSIONS (WHITE)
7	4" SKIP-DASH (WHITE)	14	RESERVED

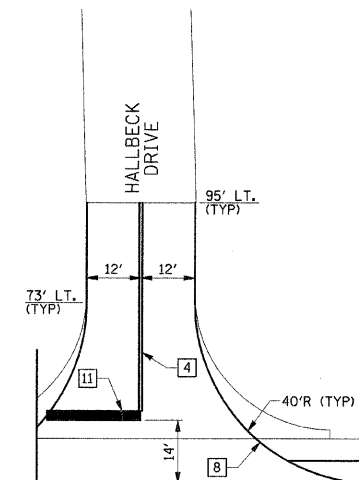

NOTE  
POLYUREA PAVEMENT MARKINGS SHALL BE USED ON ALL P.C. CONCRETE SURFACES. THERMOPLASTIC PAVEMENT MARKINGS SHALL BE USED ON ALL HOT-MIX ASPHALT SURFACES. SEE PAVEMENT MARKING SCHEDULE OF QUANTITIES FOR LOCATIONS OF EACH MATERIAL TYPE.

ILLINOIS DEPARTMENT OF TRANSPORTATION  
**CURTIS ROAD  
PAVEMENT MARKING PLANS**  
DATE : 10-08  
DRAWN BY : J.L.B.  
CHECKED BY : R.L.H.  
SCALE : 1"=20'