


<b>PROPOSED <math>\dot{C}</math> CURTIS RD. CURVE DATA</b>	<b>PROPOSED <math>\dot{C}</math> CURTIS RD. CURVE DATA</b>
P.I. STA. 125+25.18	P.I. STA. 129+69.15
$\Delta = 3^{\circ}56'16''$	$\Delta = 3^{\circ}56'16''$
D = 0 $^{\circ}53'13''$	D = 0 $^{\circ}53'13''$
T = 222.07'	T = 222.07'
R = 6460.00'	R = 6460.00'
L = 443.97'	L = 443.97'
E = 3.82'	E = 3.82'
P.C. STA. 123+03.11	P.R.C. STA. 127+47.08
P.R.C. STA. 127+47.08	P.T. STA. 131+91.04
S.E. = NONE	S.E. = NONE

TYPICAL PAVEMENT MARKING LEGEND			
1	4" SKIP-DASH (YELLOW)	8	4" SOLID (WHITE)
2	4" SOLID (YELLOW)	9	12" DIAGONAL (WHITE)
3	12" DIAGONAL (YELLOW)	10	6" CROSSWALK (WHITE)
4	4" DOUBLE YELLOW (NARROW)	11	24" STOP BAR (WHITE)
5	4" DOUBLE YELLOW (WIDE) N/A	12	8" SOLID (WHITE) N/A
6	6" DIAGONAL (YELLOW) N/A	13	4" LANE LINE EXTENSIONS (WHITE)
7	4" SKIP-DASH (WHITE)	14	RESERVED

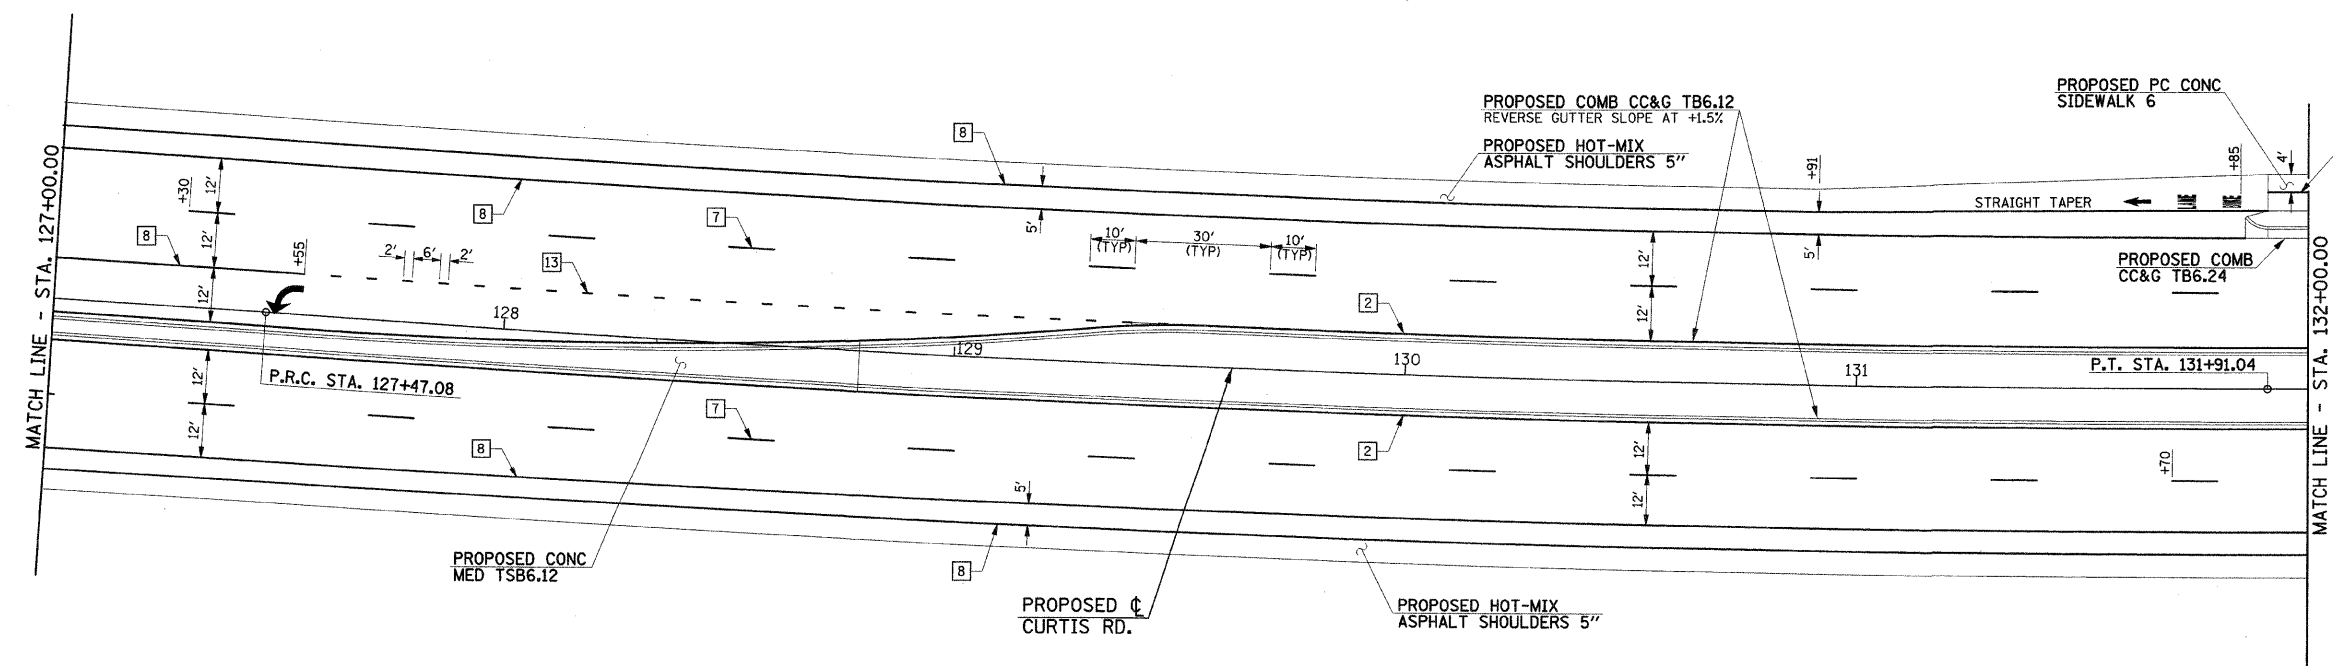

**NOTE**  
 POLYUREA PAVEMENT MARKINGS SHALL BE USED ON ALL P.C. CONCRETE SURFACES. THERMOPLASTIC PAVEMENT MARKINGS SHALL BE USED ON ALL HOT-MIX ASPHALT SURFACES. SEE PAVEMENT MARKING SCHEDULE OF QUANTITIES FOR LOCATIONS OF EACH MATERIAL TYPE.

ILLINOIS DEPARTMENT OF TRANSPORTATION  
**CURTIS ROAD  
 PAVEMENT MARKING PLANS**

DATE : 10-08  
 DRAWN BY : J.L.B.  
 CHECKED BY : R.L.H.