

STA. 146+46.70 (C CURTIS RD.) =
STA. 800+00.00 (C WESLEY AVE./REGENCY DR.)


PROPOSED C CURTIS RD. CURVE DATA
P.I. STA. 149+19.91
Δ = 2°31'45"
D = 1°07'13"
T = 112.91'
R = 5114.73'
L = 225.78'
E = 1.25'
P.C. STA. 148+07.00
P.R.C. STA. 150+32.78
S.E. = NONE

PROPOSED C CURTIS RD. CURVE DATA
P.I. STA. 151+46.48
Δ = 2°31'45"
D = 1°06'45"
T = 113.70'
R = 5150.73'
L = 227.37'
E = 1.25'
P.R.C. STA. 150+32.78
P.T. STA. 152+60.15
S.E. = NONE

TYPICAL PAVEMENT MARKING LEGEND			
1	4" SKIP-DASH (YELLOW)	8	4" SOLID (WHITE)
2	4" SOLID (YELLOW)	9	12" DIAGONAL (WHITE)
3	12" DIAGONAL (YELLOW)	10	6" CROSSWALK (WHITE)
4	4" DOUBLE YELLOW (NARROW)	11	24" STOP BAR (WHITE)
5	4" DOUBLE YELLOW (WIDE) N/A	12	8" SOLID (WHITE) N/A
6	6" DIAGONAL (YELLOW) N/A	13	4" LANE LINE EXTENSIONS (WHITE)
7	4" SKIP-DASH (WHITE)	14	RESERVED

← LIMITS OF THERMOPLASTIC PAVEMENT MARKING (EXCEPT FOR SIDEWALK PAVEMENT MARKINGS - SEE NOTE) →

END PROJECT END IMPROVEMENTS CURTIS ROAD STA. 152+65.00

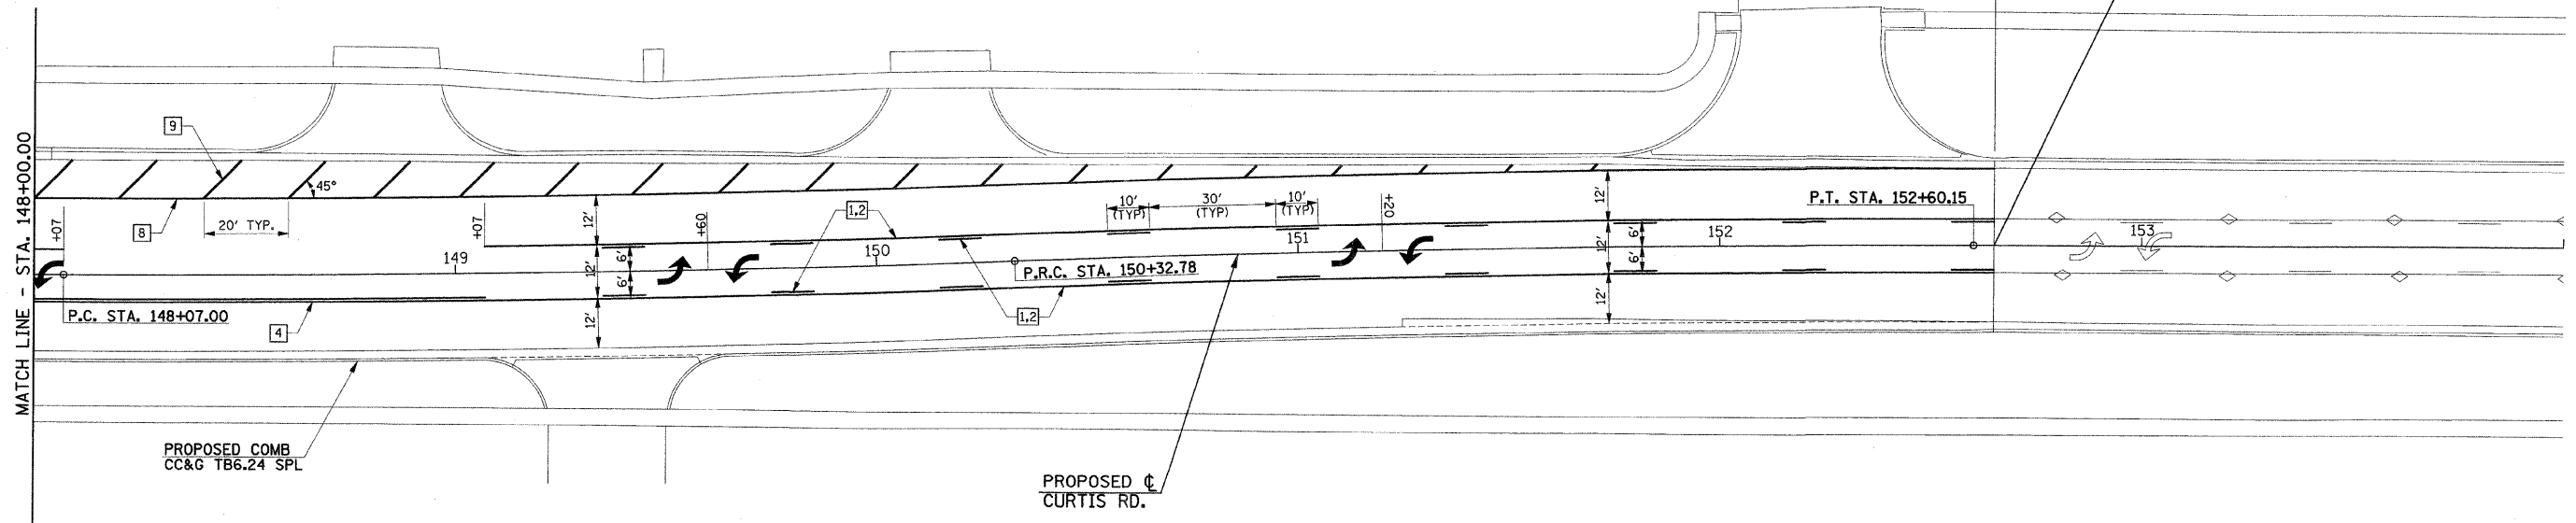

NOTE
POLYUREA PAVEMENT MARKINGS SHALL BE USED ON ALL P.C. CONCRETE SURFACES; THERMOPLASTIC PAVEMENT MARKINGS SHALL BE USED ON ALL HOT-MIX ASPHALT SURFACES. SEE PAVEMENT MARKING SCHEDULE OF QUANTITIES FOR LOCATIONS OF EACH MATERIAL TYPE.

ILLINOIS DEPARTMENT OF TRANSPORTATION
CURTIS ROAD PAVEMENT MARKING PLANS
DATE : 10-08
DRAWN BY : J.L.B.
CHECKED BY : R.L.H.
SCALE : 1"=20'
SHEET 117 OF 242 SHEETS C01401