

ALUMINUM TUBE



FIBERGLASS PIPE



TOP PLAN



TOP PLAN
(Showing aluminum tube)

FLOOR DRAIN DETAILS

Notes:
Fiberglass pipe shall conform to ASTM D2996, with short-time rupture strength hoop tensile stress of 30,000 p.s.i. minimum.
The exterior surfaces of the floor drains shall be coated or pigmented by the manufacturer with a color that matches the concrete.

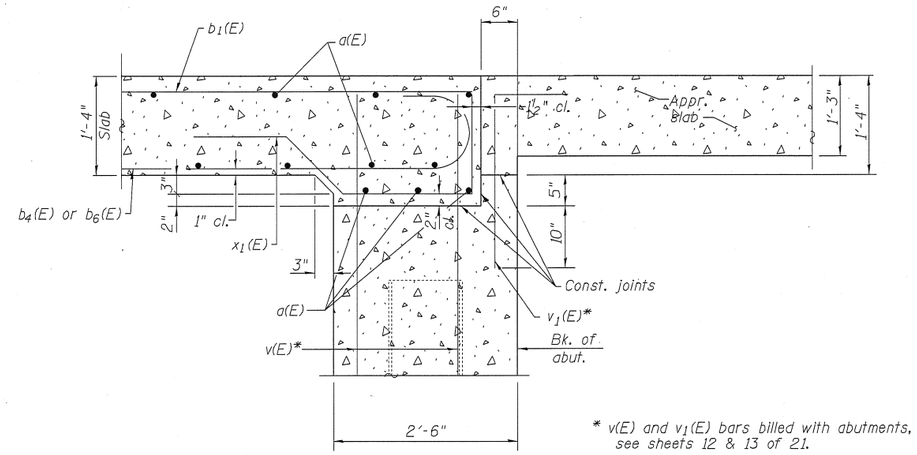

* v(E) and v_1(E) bars billed with abutments, see sheets 12 & 13 of 21.

SECTION A-A

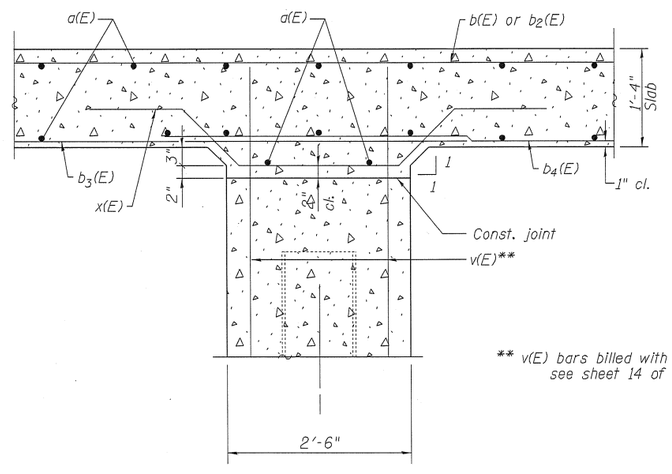

** v(E) bars billed with piers, see sheet 14 of 21.

SECTION B-B

FILE NAME = $FILE$	USER NAME = $USER$	DESIGNED - ELH 09/10	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUPERSTRUCTURE DETAILS STRUCTURE NO. 093-0026	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	ESCA JOB NO. 933.12	CHECKED - MJW/RDP 09/10	REVISED -			332	(103B)B-1	WABASH	53	24
	PLOT SCALE = $SCALE$	DRAWN - DWH/KAH 08/11	REVISED -					CONTRACT NO. 74220		
	PLOT DATE = $DATE$ $TIME$	CHECKED - ELH 08/11	REVISED -		SHEET NO. 9 OF 21 SHEETS			ILLINOIS FED. AID PROJECT		