

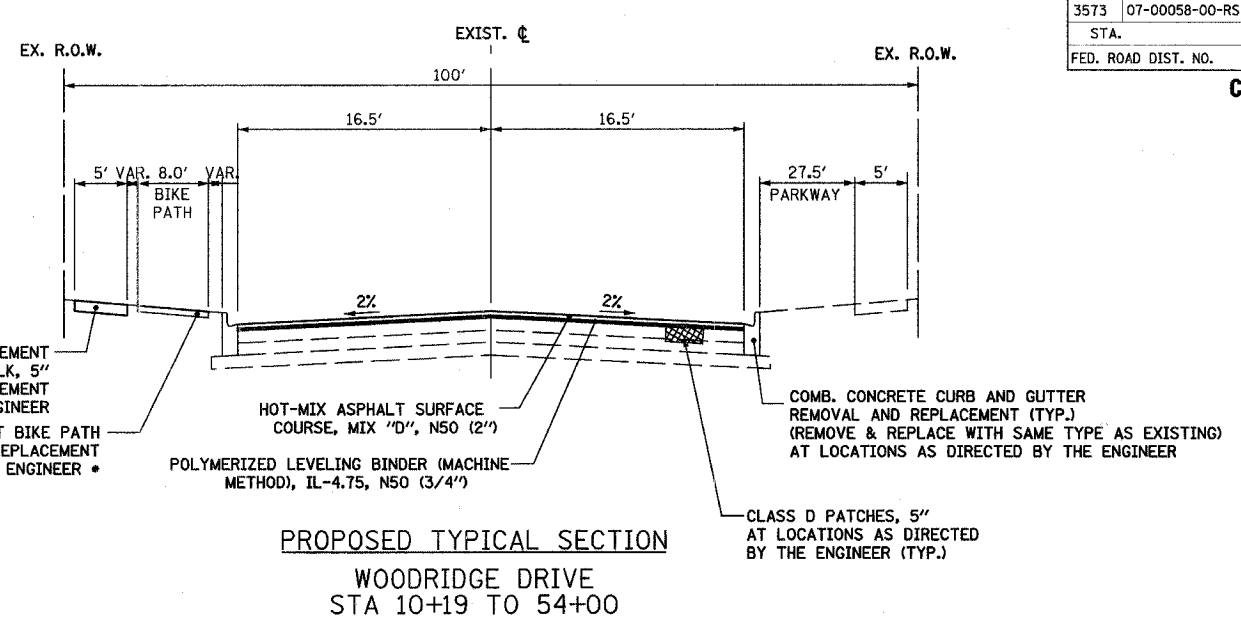
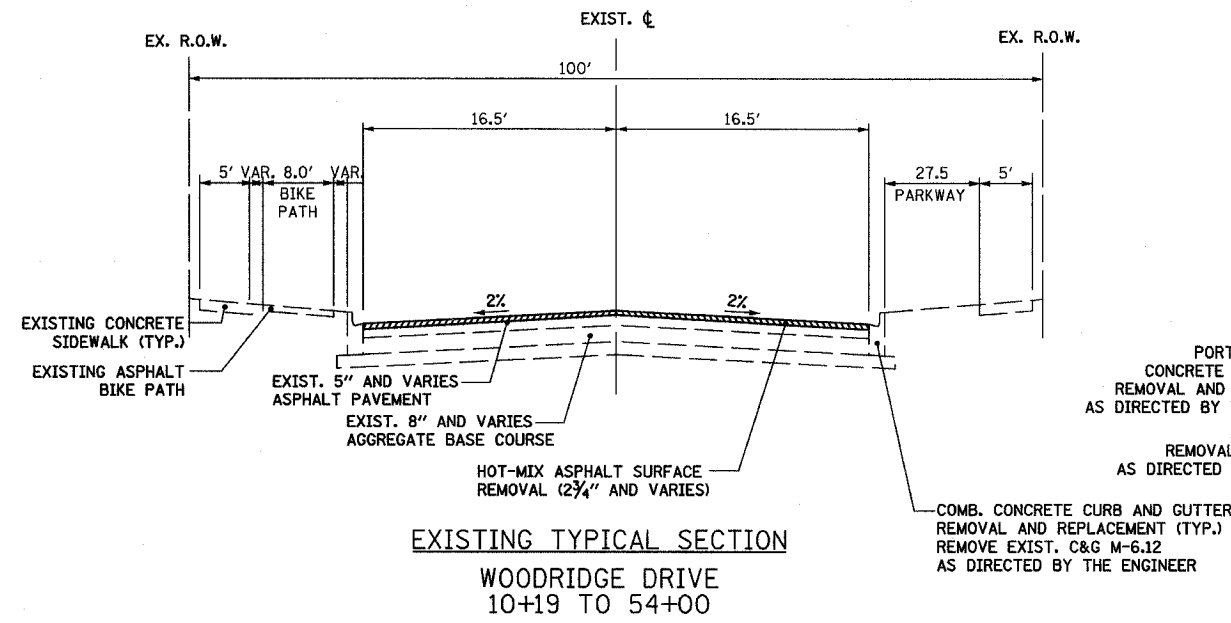


F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
3573	07-00058-00-RS	DUPAGE	21	4
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

CONTRACT NO. 83976

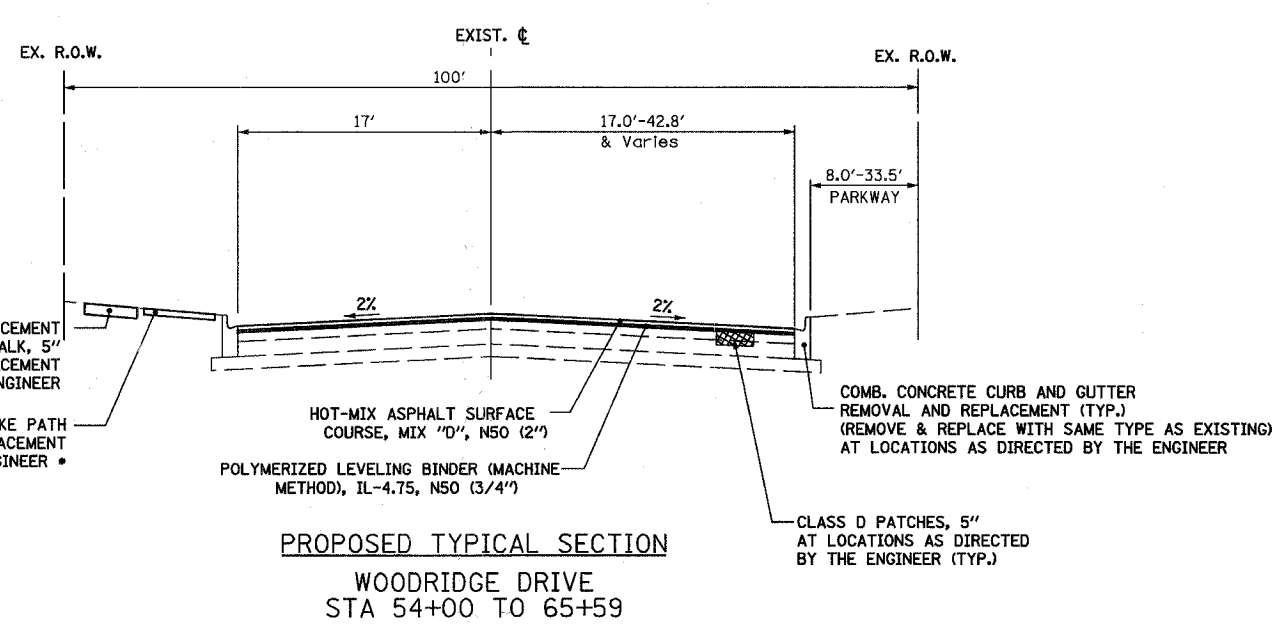

• REMOVAL PAID FOR AS SIDEWALK REMOVAL
 REPLACEMENT PID FOR AS HMA SURFACE COURSE, MIX "D", N50 (2") (STONE BASE REPLACEMENT SHALL BE INCLUDED IN THE HMA SURFACE COURSE PAY ITEM)

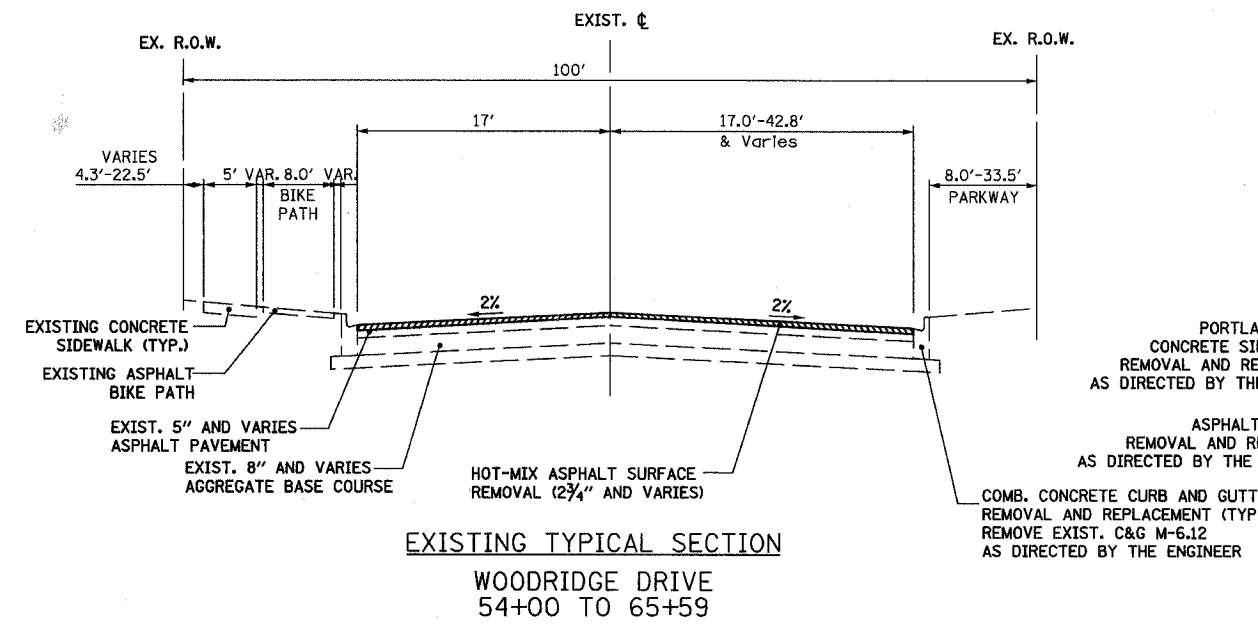

RESURFACING

MAINLINE PAVEMENT
 --WOODRIDGE DRIVE--
 83RD STREET TO 75TH STREET
 HOT-MIX ASPHALT MIXTURE REQUIREMENTS

ITEM	AC TYPE	VOIDS
ROADWAY HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50 (IL9.5MM) 2"	PG 64-22	4% @ 50 Gyr.
POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50 3/4"	SBS/SBR PG 76-28/-22	4% @ 50 Gyr.
PATCHING CLASS D PATCHES, (HMA BINDER IL-19MM) 5"	PG 64-22 *	4% @ 70 Gyr.
HMA REPLACEMENT OVER PATCHES (HMA BINDER IL-19MM)	PG 64-22 *	4% @ 70 Gyr.

THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURES IS 112 LBS/ SQ YD/IN

• WHEN RAP EXCEEDS 20%, THE NEW ASPHALT BINDER IN THE MIX SHALL BE PG 58-22

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
 WOODRIDGE DRIVE
 TYPICAL SECTIONS

DRAWN BY: LLM

DATE: OCTOBER 12, 2007

CHECKED BY: JRP