

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
VARIOUS	2012-076BP	COOK	34	4

Contract 60V86

GENERAL NOTES FOR PAINT

CLEANING AND PAINTING OF THE EXISTING STRUCTURAL STEEL SHALL BE AS SPECIFIED IN THE SPECIAL PROVISION FOR "CLEANING AND PAINTING EXISTING STEEL STRUCTURES".

A MINIMUM OF TWO (2) AIR MONITORS WILL BE REQUIRED AT LOCATION #3 (SN 016-0610) AND A MINIMUM OF ONE (1) AIR MONITOR WILL BE REQUIRED AT ALL OTHER LOCATIONS, TO MONITOR ABRASIVE BLASTING OPERATIONS. SEE SPECIAL PROVISION FOR "CONTAINMENT AND DISPOSAL OF LEAD PAINT CLEANING RESIDUE."

THE AREAS DESIGNATED TO BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10 SHALL BE PAINTED ACCORDING TO THE REQUIREMENTS OF PAINT SYSTEM 1 - OZ/E/U. THE COLOR OF THE FINAL FINISH COAT FOR ALL INTERIOR STEEL SURFACES SHALL BE GRAY, MUNSELL NO 5B 7/11. FOR LOCATIONS 2 AND 3, THE COLOR OF THE FINAL FINISH COAT FOR ALL HANDRAILS AND FENCES SHALL BE GRAY, MUNSELL NO 5B 7/11. THE COLOR OF THE FINAL FINISH COAT FOR THE EXTERIOR AND BOTTOM FLANGE OF THE FASCIA BEAMS SHALL BE REDDISH BROWN, MUNSELL NO 2.5YR 3/4.

ALL ITEMS (SUCH AS, BUT NOT LIMITED TO: CONDUITS, BRACKETS AND DECK DRAINS) ATTACHED TO THE OUTSIDE OF THE FASCIA BEAMS SHOULD BE CLEANED AND PAINTED.

LOC's 1 (SN 016-0961) & 5 (SN 016-0478)

ALL BEAMS, BEARINGS AND OTHER STRUCTURAL STEEL WITHIN FIVE (5) FT., (MEASURED ALONG THE BEAM) OF EITHER SIDE OF ALL DECK JOINTS, SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE EXTERIOR SURFACES AND TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE FASCIA BEAMS (SEE FIGURE 1) SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

LOC 2 (SN 016-2039)


ALL EXISTING STEEL HANDRAILS AND FENCE POSTS ON BRIDGE AND WINGWALLS SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

LOC 3 (SN 016-0610)

ALL EXISTING STEEL HANDRAILS AND FENCE POSTS ON ADJACENT RETAINING WALLS AT NORTHEAST QUADRANT SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

LOC 4 (SN 016-0460)

FOR BENT "J" ALL STRUCTURAL STEEL INCLUDING COLUMNS WITHIN FIVE (5) FT., (MEASURED PERPENDICULAR TO THE BENT) OF EITHER SIDE OF THE BENTS, SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. FOR BENT "G" ALL STRUCTURAL STEEL INCLUDING COLUMNS WITHIN FIVE (5) FT. TO THE EAST AND TEN (10) FT. TO THE WEST, (MEASURED PERPENDICULAR TO THE BENT) SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. STRUCTURAL STEEL FROM PIER "D" TO FIVE (5) FT. EAST OF BENT "F" SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

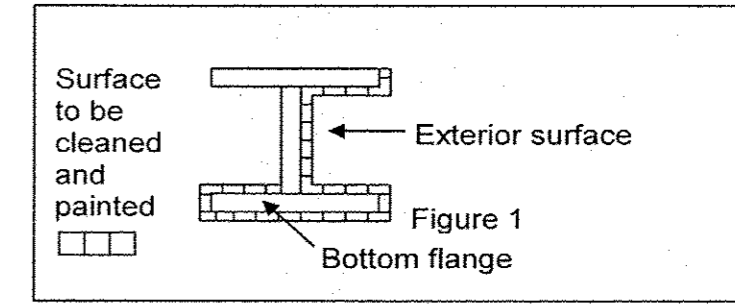

FASCIA BEAM PAINTING DETAIL
FIGURE 1