

Stainless steel standard grade wire cloth,  
6x6 (1/4") mesh or less with #16 gauge  
(0.062") diameter or heavier wire.

Attach with 1/2" stainless steel banding  
or tie back onitself with stainless steel wire ties.  
Finished installation must prevent rodent entry.

# WIRING DETAIL

NO SCALE


## GENERAL NOTES

All taped splices shall use 2 layers of electrical tape  
over 3 layers of rubber tape as required by the  
Standard Specifications. Coat the finished taped  
splice with bonding compound.

All cable splices shall be taped unless another method  
has been specifically approved by the Engineer.

For example purposes the pole is shown on an anchor base.  
If the pole is required to be set on a breakaway base,  
consult the Standard Specifications.

All dimensions are in millimeters (Inches)  
unless otherwise shown.

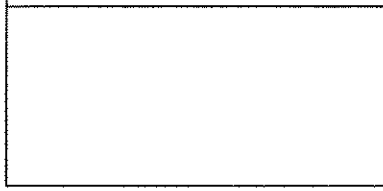

DATE	REVISIONS	POLE HANDHOLE WIRING				
7/31/08	Updated	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		**	(RS),2(RS),S(RS-6)	SANGAMON	116	113A
					CONTRACT NO. 72F23	
		ILLINOIS FED. AID PROJECT				

LGTO08A.DGN