

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
326	(109)DM	KENDALL	3	1
ILLINOIS		CONTRACT NO. 66A11		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
**PROPOSED
HIGHWAY PLANS**

FAP ROUTE 326 (IL 47)
SECTION (109)DM



**REMOVAL OF TWO BUILDINGS
IN YORKVILLE
KENDALL COUNTY**
C-93-086-10

INDEX OF SHEETS

- 1 COVER SHEET
- 2 GENERAL NOTES & SUMMARY OF QUANTITIES
- 3 PLAN VIEW

STANDARDS

- 000001-05 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 701001-02 OFF-ROAD OPERATIONS 2L, 2W, MORE THAN 15' (4.5 m) AWAY
- 701006-03 OFF-ROAD OPERATIONS 2L, 2W, 15' (4.5 m) TO 24" (600 mm) FROM PAVEMENT EDGE
- 701301-03 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
- 701901-01 TRAFFIC CONTROL DEVICES

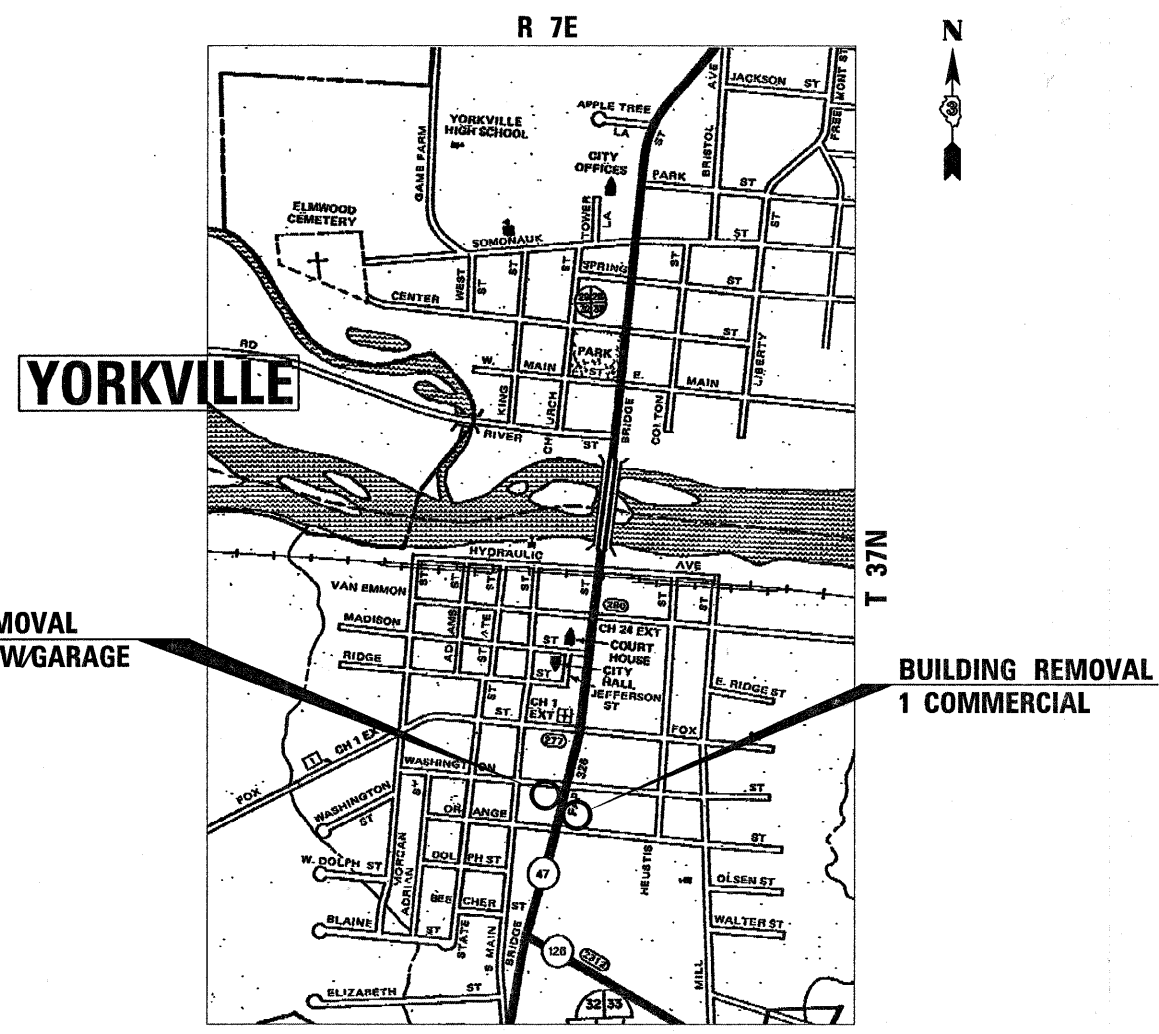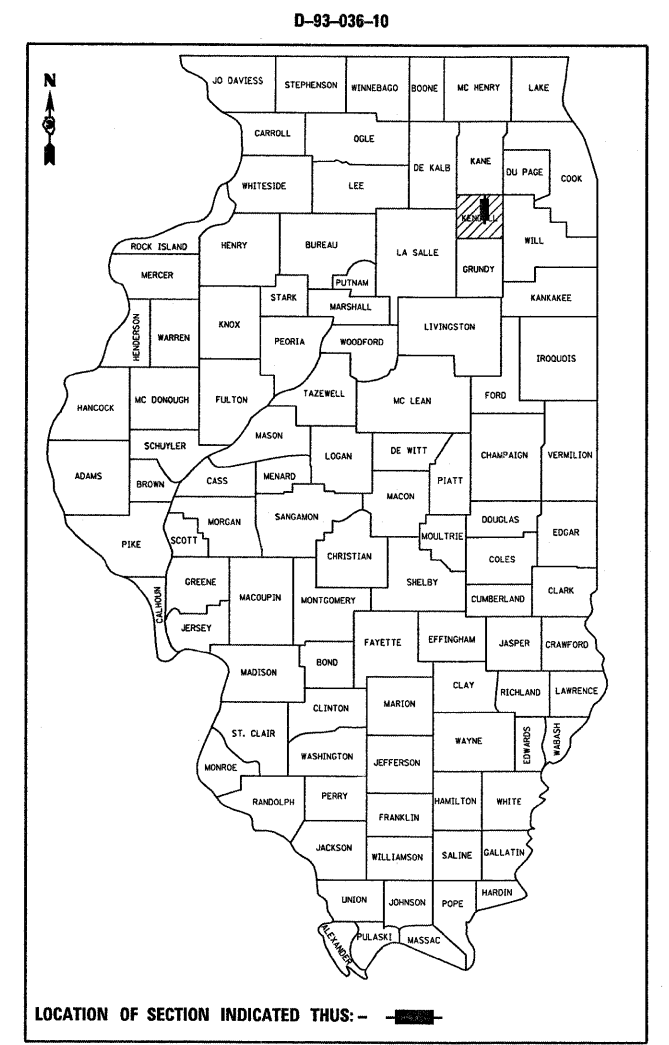

**BUILDING REMOVAL
1 RESIDENCE W/GARAGE**

**BUILDING REMOVAL
1 COMMERCIAL**

LOCATION MAP
NOT TO SCALE

MICROFILMED _____
REEL NUMBER _____
AWARDED _____
RESIDENT ENGINEER _____
AS BUILT CHANGES WERE MADE
ON THE FOLLOWING SHEETS _____

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

**PROJECT ENGINEER: CRAIG REED
UNIT CHIEF: BRAD DUNCAN
TOWNSHIP: BRISTOL**

CONTRACT NO. 66A11

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED January 28, 2010
George Ryan
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

March 19, 2010
Scott E. Stiel, P.E.
acting ENGINEER OF DESIGN AND ENVIRONMENT

March 19, 2010
Christine M. Reed
DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**

GENERAL NOTES

SEEDING SHALL NOT BE PERMITTED AT ANY TIME WHEN THE GROUND IS FROZEN, WET, OR IN AN UNTILLABLE CONDITION. LOCATIONS TO BE SEEDED WILL BE DETERMINED BY THE ENGINEER.

ONLY THOSE TREES DESIGNATED BY THE ENGINEER OR LISTED IN THE TREE REMOVAL SCHEDULE SHALL BE REMOVED. THE CONTRACTOR SHALL PROTECT ALL REMAINING TREES FROM DAMAGE DUE TO HIS OPERATIONS.

ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUBNUMBER SHOWN IN THE LIST OF STANDARDS OR THE COPY INCLUDED IN THESE PLANS.

MEMBERS OF JULIE KNOWN TO BE WITHIN THE LIMITS OF THE IMPROVEMENT ARE:

- COMMONWEALTH EDISON
- AT & T
- COMCAST
- NICOR GAS

NO EARTH/EMBANKMENT MATERIAL MAY BE REMOVED OFFSITE. THE EARTH SOIL MAY BE MOVED AS LONG AS IT STAYS ON SITE. IF CONSTRUCTION OPERATIONS REQUIRE THAT EARTH MATERIAL TO BE REMOVED OFFSITE THE DISTRICT 3 ENVIRONMENTAL UNIT SHALL BE CONTACTED AT 815-434-8569 PRIOR TO ANY EARTH REMOVAL OPERATIONS. ANY EARTH REMOVAL OPERATIONS AT THIS SITE, AS DIRECTED BY THE ENGINEER, WILL REQUIRE OBTAINING AN ENVIRONMENTAL FIRM TO MONITOR THE OFFSITE REMOVAL AT THE EXPENSE OF THE CONTRACTOR.

SUMMARY OF QUANTITIES

CODE NO.	ITEM	CONSTRUCTION CODE TYPE:		URBAN 100% STATE
		UNIT	Y004	TOTAL QUANTITY
20100110	TREE REMOVAL (6 TO 15 UNITS DIAMETER)	UNIT		34
20100210	TREE REMOVAL (OVER 15 UNITS DIAMETER)	UNIT		24
21101615	TOPSOIL FURNISH AND PLACE, 4"	SQ YD		1467
25000200	SEEDING, CLASS 2	ACRE		0.3
25000400	NITROGEN FERTILIZER NUTRIENT	POUND		27
25000500	PHOSPHORUS FERTILIZER NUTRIENT	POUND		27
25000600	POTASSIUM FERTILIZER NUTRIENT	POUND		27
25100115	MULCH METHOD 2	ACRE		0.3
28000250	TEMPORARY EROSION CONTROL SEEDING	POUND		30
67100100	MOBILIZATION	L SUM		1
Z0007601	BUILDING REMOVAL NO. 1	L SUM		1
Z0007602	BUILDING REMOVAL NO. 2	L SUM		1
* Z0049901	REMOVAL AND DISPOSAL OF NON-FRIABLE ASBESTOS, BUILDING NO. 1	L SUM		1
* Z0049902	REMOVAL AND DISPOSAL OF NON-FRIABLE ASBESTOS, BUILDING NO. 2	L SUM		1

* SPECIALTY ITEMS

TOPSOIL & SEEDING

BUILDING NUMBER (PARCEL #)	TOPSOIL FURNISH AND PLACE 4"	SEEDING CLASS 2	NITROGEN FERTILIZER NUTRIENT	PHOSPHORUS FERTILIZER NUTRIENT	POTASSIUM FERTILIZER NUTRIENT	MULCH METHOD 2
	SQ YD	ACRE	TON	TON	TON	ACRE
1 (3KC0043)	403	0.08	7	7	7	0.08
2 (3KC0042DED)	1064	0.22	20	20	20	0.22
TOTALS	1467	0.30	27	27	27	0.30

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE

PREPARED BY: Dino Brown
ACTING DISTRICT STUDIES & PLANS ENGINEER

DATE: January 28, 2010

EXAMINED BY: Robert K. Dwyer
DISTRICT CONSTRUCTION ENGINEER

James A. Huescher
DISTRICT MATERIALS ENGINEER

James A. Huescher
DISTRICT OPERATIONS ENGINEER



FILE NAME =	USER NAME = duncanbd	DESIGNED -	REVISED -
c:\pwork\FWIDOT\DUNCANBD\0176478\036A11-sht-details.DGN		DRAWN -	REVISED -
PLDT SCALE = 5.0000' / IN.		CHECKED -	REVISED -
PLDT DATE = Feb 11, 2010 - 07:32:42 AM		DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

PLAN VIEW

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.P. RTE. 326	SECTION (109)DM	COUNTY KENDALL	TOTAL SHEETS 3	SHEET NO. 3
CONTRACT NO. 66A11				
ILLINOIS FED. AID PROJECT				

Revised 02/11/10