



ELEVATION AT EAST ABUT.


TYPE I ELASTOMERIC EXP. BRG.

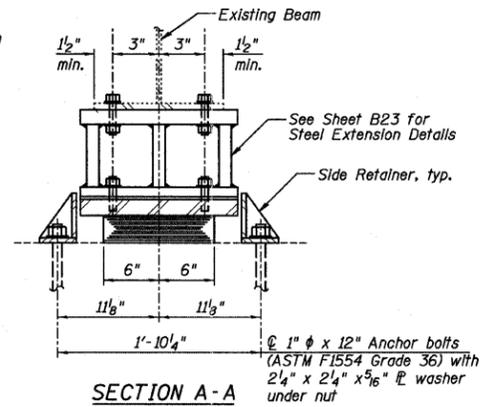

SECTION A-A

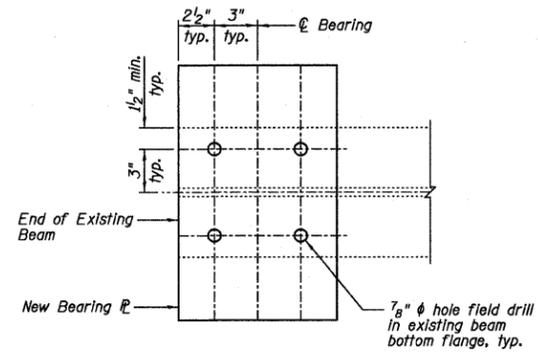


PLAN VIEW B-B

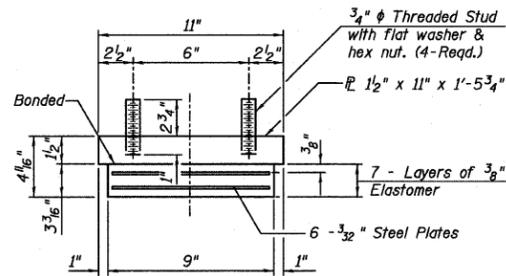

BEARING ASSEMBLY

Notes:
Shim plates shall not be placed under Bearing Assembly.

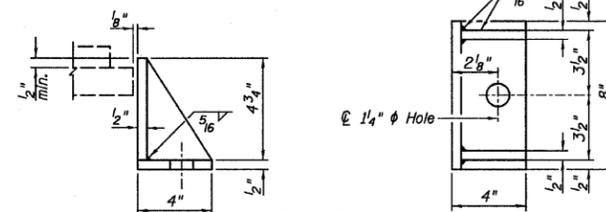

SIDE RETAINER

Equivalent rolled angle with stiffeners will be allowed in lieu of welded plates.

Notes:
Anchor bolts shall be ASTM F1554 all-thread (or an Engineer-approved alternate material) of the grade(s) and diameter(s) specified. ASTM A307 Grade C anchor bolts may be used in lieu of ASTM F1554 Grade 36 (Fy=36ksi). The corresponding specified grade of AASHTO M314 anchor bolts may be used in lieu of ASTM F1554.
Drilled and set anchor bolts shall be installed according to Article 521.06 of the Standard Specifications.
Side retainers and other steel members required for the elastomeric bearing assembly shall be included in the cost of Elastomeric Bearing Assembly, Type I.

TABLE "A"

| Beam No. | Shim Thickness |
|----------|----------------|
| 1-8 | 1/8" |

BILL OF MATERIAL

| ITEM | UNIT | 082-0169 | 082-0170 | TOTAL |
|--|-------|----------|----------|-------|
| Furnishing and Erecting Structural Steel | Pound | 360 | 300 | 660 |
| Anchor Bolts, 1" | Each | 42 | 30 | 72 |
| Elastomeric Bearing Assembly, Type I | Each | 21 | 15 | 36 |

NOTES:

- Two 1/8 in. adjusting shims shall be provided for each bearing in addition to all other plates or shims and placed as shown on bearing details.
- See Special Provisions for Jacking and Removing procedures for existing bearings.
- Prior to ordering any material, the Contractor shall verify in the field all bearing height and shim thickness dimensions.
- Steel extensions, shim and connection bolts shall be paid for as "Furnishing and Erecting Structural Steel". For steel extensions, see Bill of Material on Sheet B23.
- Minimum Jack capacity = 48 tons.