
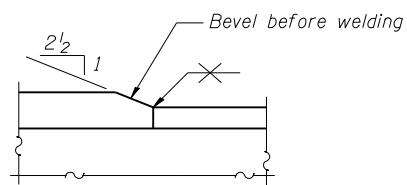
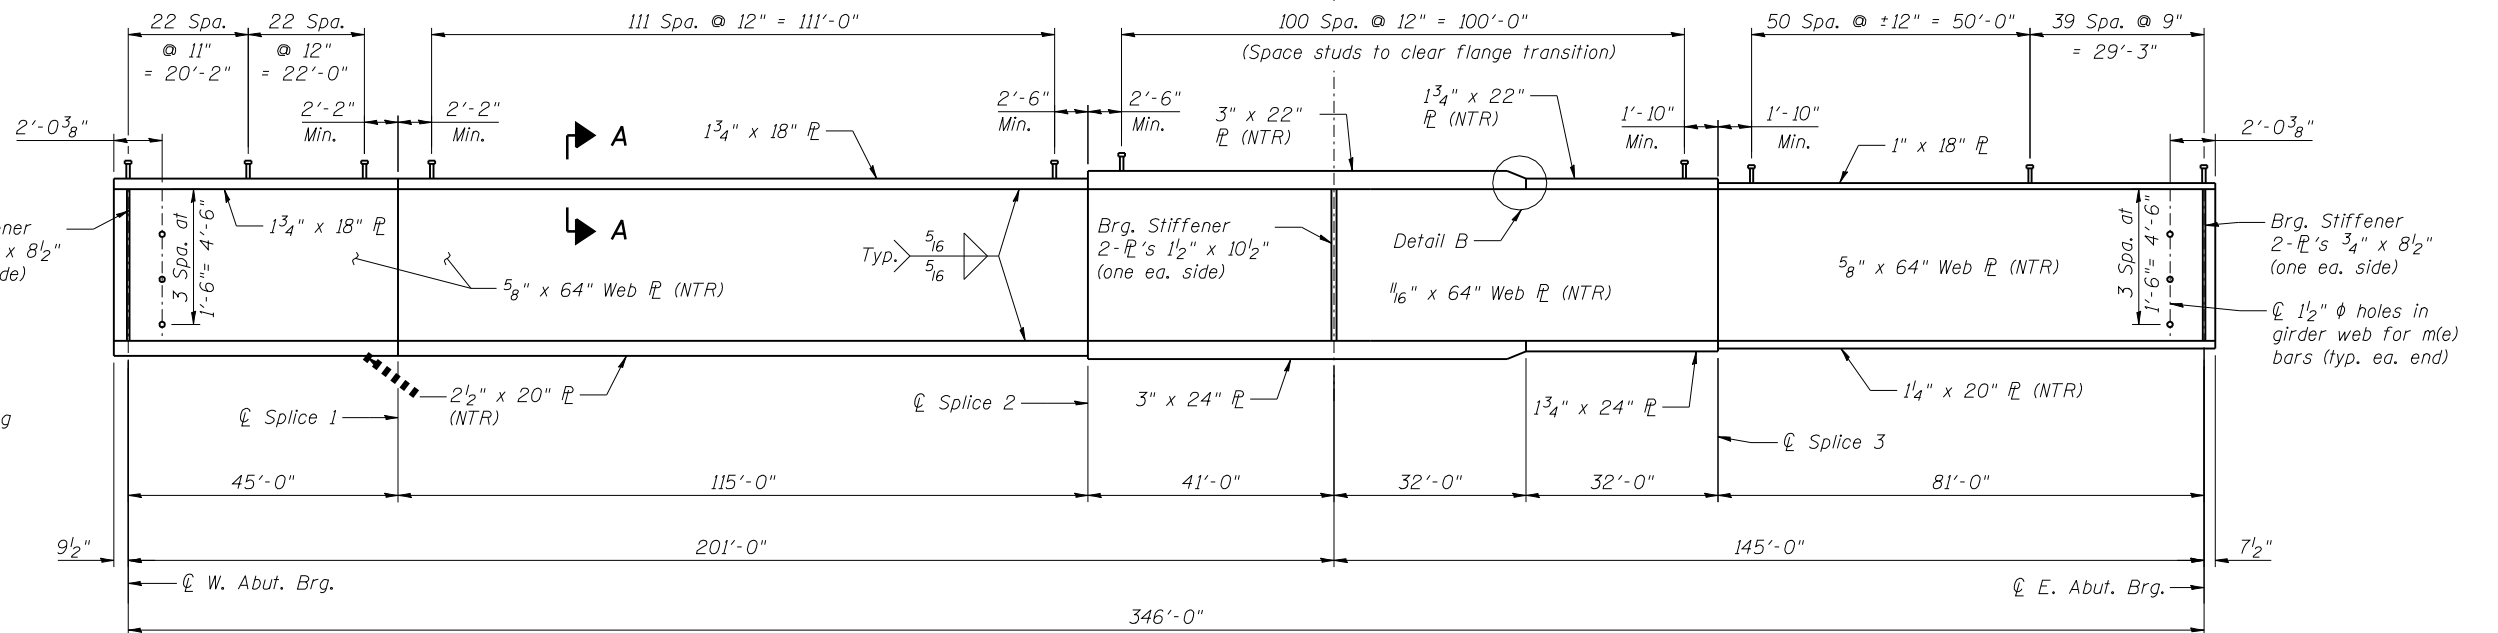


Flange width	Dim A
18"	7"
22"	9"

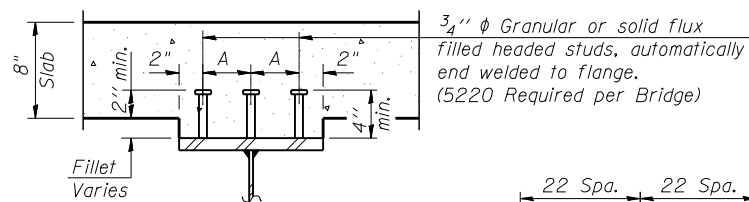

BILL OF MATERIAL
(For each structure)

Item	Unit	Total
Stud Shear Connectors	Each	5,220

- NOTES:
- For Field Splice Details, see sheet S-35 of S-62.
 - AASHTO M270 Grade 50 steel shall be used for all flanges, webs, bearing stiffeners & splice plates.
 - Load Carrying components designated "NTR" shall conform to the Supplemental Requirements for Notch Toughness, Zone 2.
 - For cross frame and bearing stiffeners see Sht. S-36 of S-62.

FILE NAME = 0820117-0118-76884-034-FramingPlan.dgn



USER NAME = brazzera
DESIGNED - BTO
CHECKED - JAN
PLOT SCALE = 32:0.0000 '1' / IN.
DRAWN - BTO
PLOT DATE = 10/19/2011
CHECKED - JAN

REVISOR -
REVISION -
REVISOR -
REVISION -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FRAMING PLAN AND GIRDER ELEVATION
STRUCTURE NO. 082-0117 (E.B.) & 082-0118 (W.B.)

SHEET NO. S-34 OF S-62 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
103	27-1-VHB-1	ST. CLAIR	277	149
CONTRACT NO. 76884				
ILLINOIS FED. AID PROJECT				