


4 REQUIRED, MOUNTED TO THE MAST ARM POLE;  
 37.50mm Radius, 15.00mm Border, White on Green;  
 [BLACKHAWK] C; [DRIVE] C;  
 Table of widths and spaces.

251.00	B	111.00	43.00	L	102.00	11.00	A	127.00	34.00	C	111.00	34.00	K	111.00	34.00	H	111.00	34.00	A	127.00	11.00	W	152.00	34.00	K	111.00	251.00
585.00	D	111.00	43.00	R	111.00	43.00	I	28.00	34.00	V	124.00	34.00	E	102.00	585.00												


GENERAL NOTES - SIGNALS

1. THE EXACT LOCATION OF THE COMBINATION MAST ARM ASSEMBLIES AND DETECTOR LOOPS SHALL BE DETERMINED IN THE FIELD BY THE ENGINEER.
2. EACH DETECTOR LOOP SHALL HAVE AN INDIVIDUAL CONDUIT STUB.
3. THE DETECTOR LOOP CABLE FROM THE END OF THE SAW CUT TO THE SPLICE IN THE HANDHOLE SHALL BE CONSIDERED INCIDENTAL TO THE COST OF THE DETECTOR LOOP.
4. THE MOUNTING HEIGHT FOR THE LUMINAIRES SHALL BE 10.7M (35'-0") ON A 3.6M (12'-0") ARM.

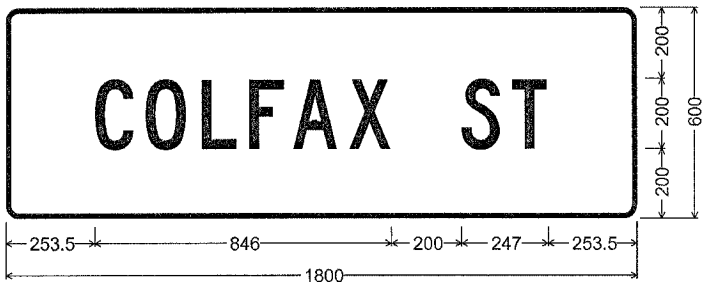

2 REQUIRED; 37.50mm Radius, 15.00mm Border, White on Green;  
 [COLFAX ST] C;  
 Table of widths and spaces.

253.50	C	111.00	34.00	O	117.00	43.00	L	102.00	34.00	F	102.00	23.00	A	127.00	34.00	X	119.00							
200.00	S	111.00	34.00	T	102.00	253.50																		

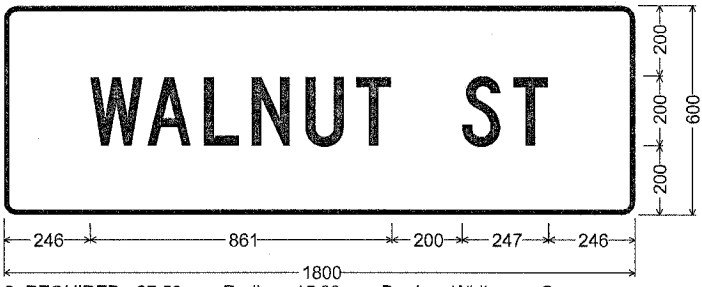

2 REQUIRED; 37.50mm Radius, 15.00mm Border, White on Green;  
 [WALNUT ST] C;  
 Table of widths and spaces.

246.00	W	152.00	11.00	A	127.00	34.00	L	102.00	34.00	N	111.00	43.00	U	111.00	34.00	T	102.00							
200.00	S	111.00	34.00	T	102.00	246.00																		

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME	DATE	

DRAWN BY L.D.HILL  
 CHECKED BY H.KNUDSON  
 DATE 7/31/02

Mon Aug 30 07:25:55 2004  
 c:\projects\m266936\ref.plm.dgn