



| A         | B               | C              | HEIGHT                     | WEIGHT          |
|-----------|-----------------|----------------|----------------------------|-----------------|
| VARIABLES | 9.5\" (241mm)   | 19\" (483mm)   | 7\" (178mm) - 12\" (300mm) | 53 lbs (24kg)   |
| VARIABLES | 10.16\" (259mm) | 21.5\" (546mm) | 7\" (178mm) - 12\" (300mm) | 68 lbs (31 kg)  |
| VARIABLES | 13.0\" (330mm)  | 26\" (660mm)   | 7\" (178mm) - 12\" (300mm) | 81 lbs (37 kg)  |
| VARIABLES | 18.5\" (470mm)  | 37\" (940mm)   | 7\" (178mm) - 12\" (300mm) | 126 lbs (57 kg) |

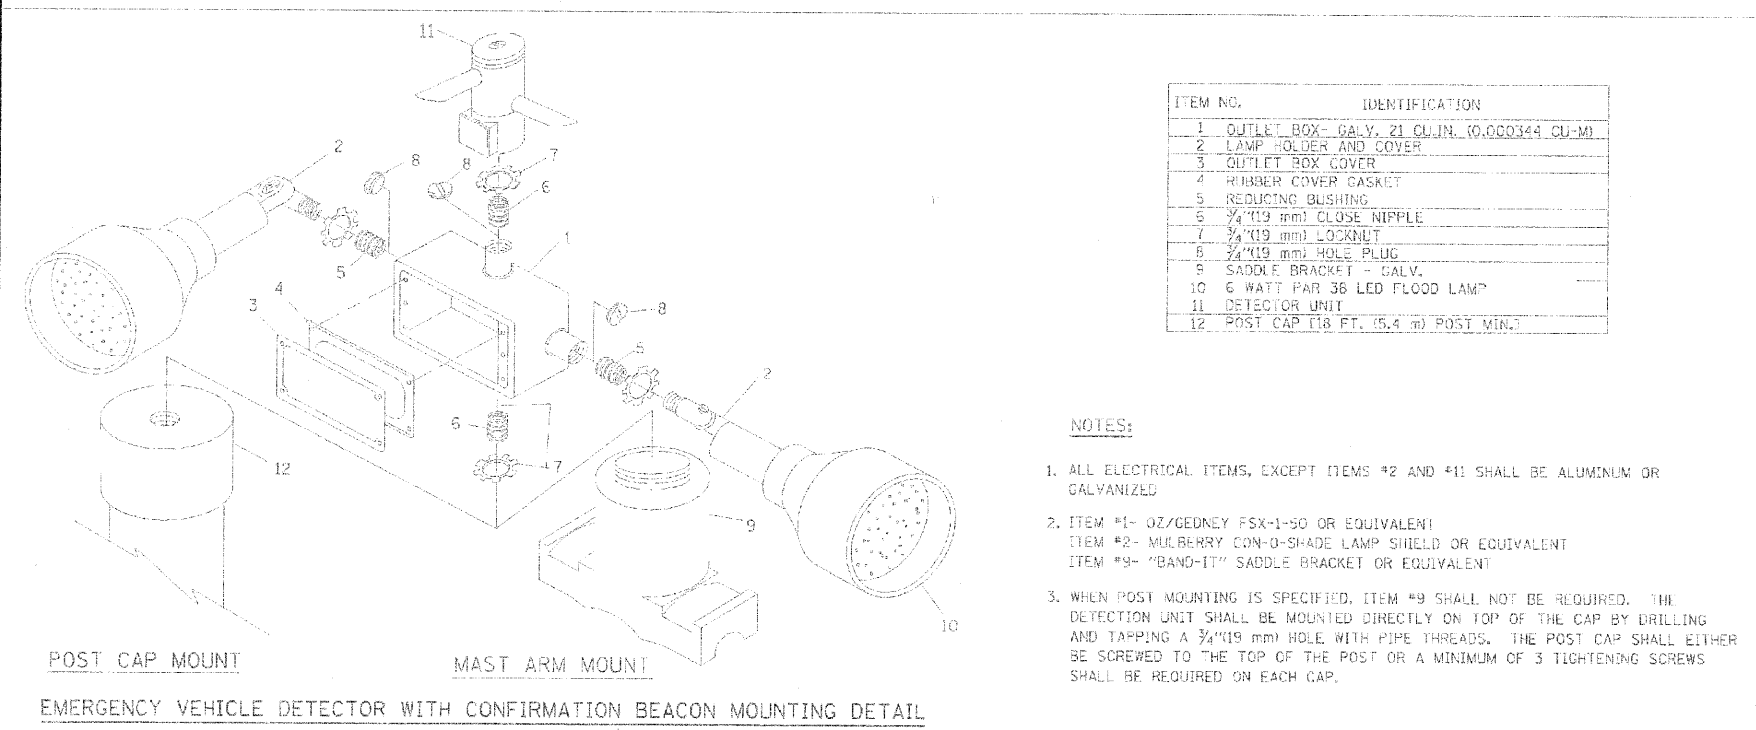

**NOTES:**

- DIMENSION "A" IS EQUAL TO THE DIAMETER OF THE MAST ARM POLE AT THE TOP OF THE SHROUD. THE SHROUD SHALL BE TIGHT TO THE MAST ARM POLE.
- THE SUPPLIER SHALL VERIFY THE ABOVE DIMENSIONS BASED ON MAST ARM REQUIREMENTS.
- THE HEIGHT OF THE SHROUD SHALL COVER THE ANCHOR BOLTS, NUTS AND MAST ARM POLE BASE.

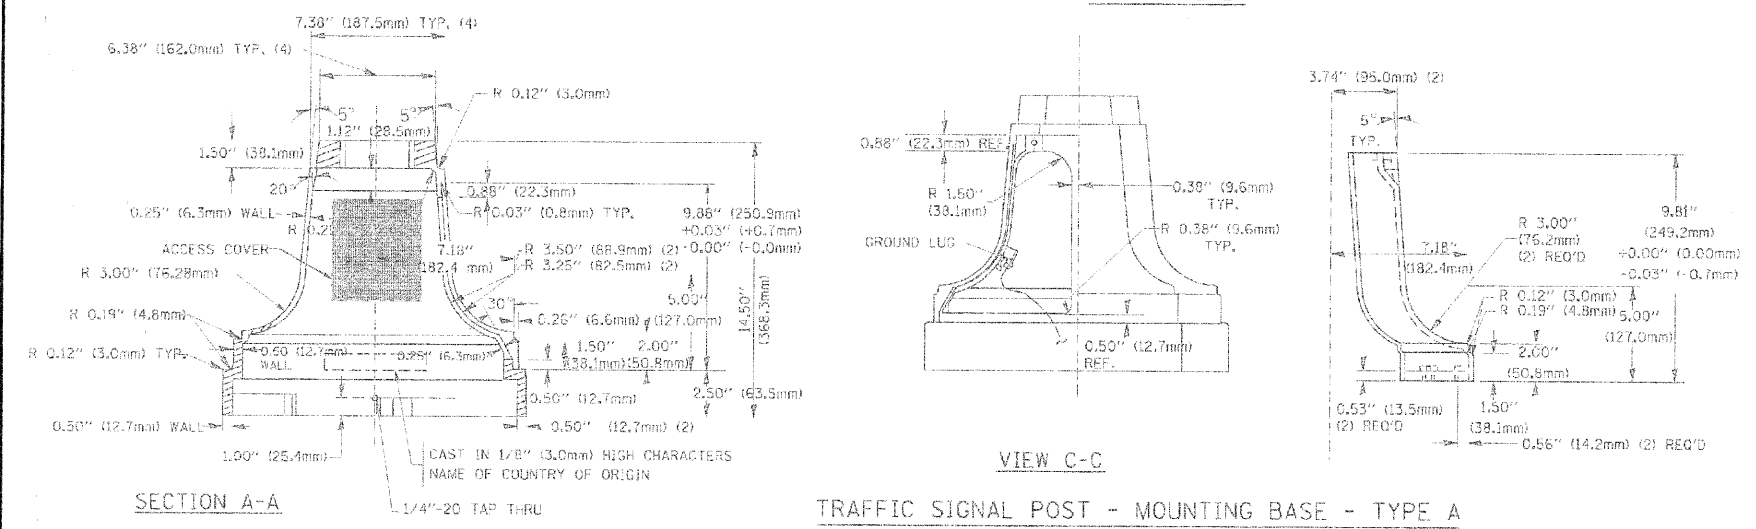