

Notes:


Reinforcement bars in diaphragm are billed with superstructure on sheet 8 of 22.

Concrete in diaphragm is included with Concrete Superstructure on sheet 8 of 22.

For details of bars $s(E)$ & $s_1(E)$ see sheet 8 of 22.

The $s(E)$ and $s_1(E)$ bars shall be placed parallel to the beams. Spacing for these bars shall be at right angles to the beams.

#6 bar = 3'-4"

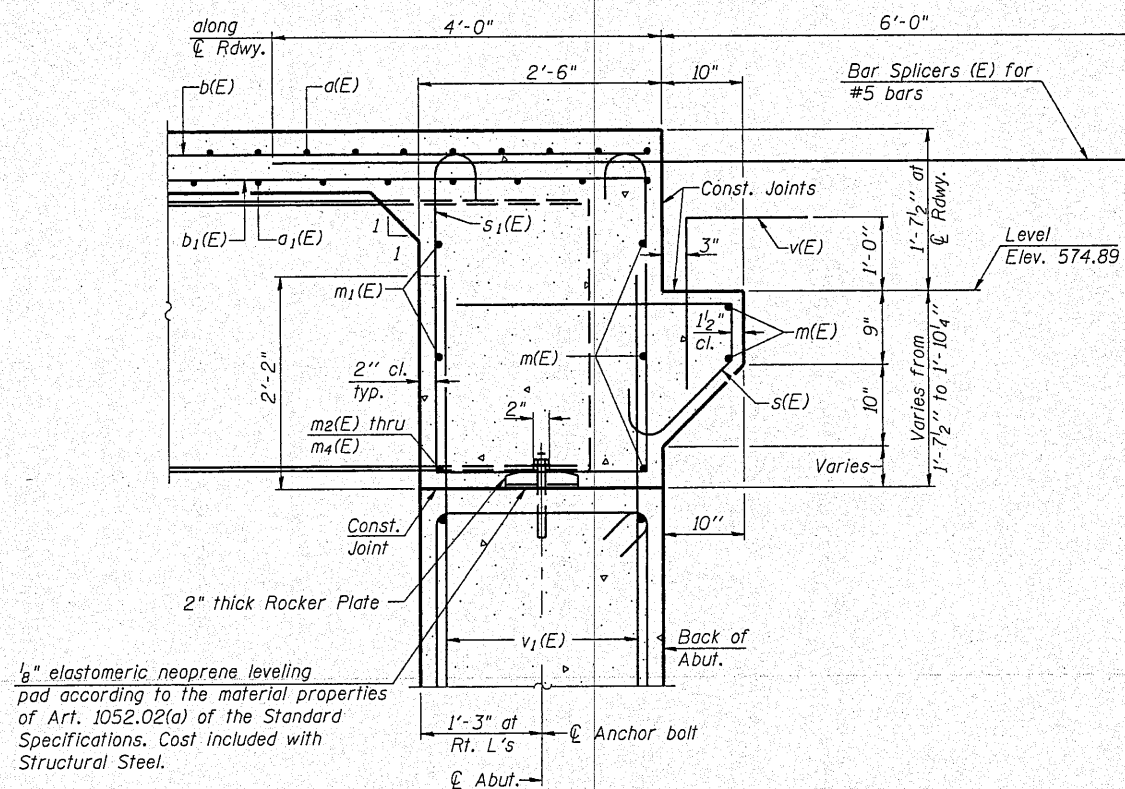

Dimensions at right angles to abutment, except as shown.

INTEGRAL ABUTMENT
DIAPHRAGM DETAILS
STRUCTURE NO. 036-0070

SHEET NO. 9 22 SHEETS	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	657	(116-C)BR-1	HENDERSON	56	26
	CONTRACT NO. 68761				
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT		