# APPROXIMATELY 15' (4.5 m) OR 8' (2.4 m) BACK FROM AND PARALLEL TO GATE, IF PRESENT. NOTES (7.6 m) Winimum Distance 400' for 55 MPH 250' for 45 MPH 100' for 35 MPH or Less NOTES THE TRAVERSE SPREAD OF THE "X" MAY VARY ACCORDING TO LANE WIDTH. ON MULTI-LANE ROADS, THE STOP LINES SHALL EXTEND ACROSS ALL APPROACH LANES AND SEPARATE RXR SYMBOLS SHALL BETLACED ADJACENT TO EACH OTHER IN

DESIGNED

CHECKED

DRAWN

DATE

USER NAME = hennessdm 0800-sht-Details.dgn

LOT SCALE = 40.0000 '/ IN.

PLOT DATE = 10/20/2010

PAVEMENT MARKINGS AT

RAILROAD-HIGHWAY GRADE CROSSING

FILE NAME =

EACH LANE.

OF THE MUTCD.

REVISED - 11/06

09/2009 - KJT

REVISED

REVISED

REVISED


WHEN THE PAVEMENT MARKING SYMBOL

TO THE ADVANCE WARNING SIGN (W10-1) AS PLACED BY TABLE II-1, CONDITION B

IS USED, A PORTION OF THE SYMBOL SHOULD BE LOCATED DIRECTLY ADJACENT

## RAILROAD CROSSING WITH INTERCONNECT ONLY

### RAILROAD CROSSING WITH INTERCONNECT AND PRE-SIGNALS

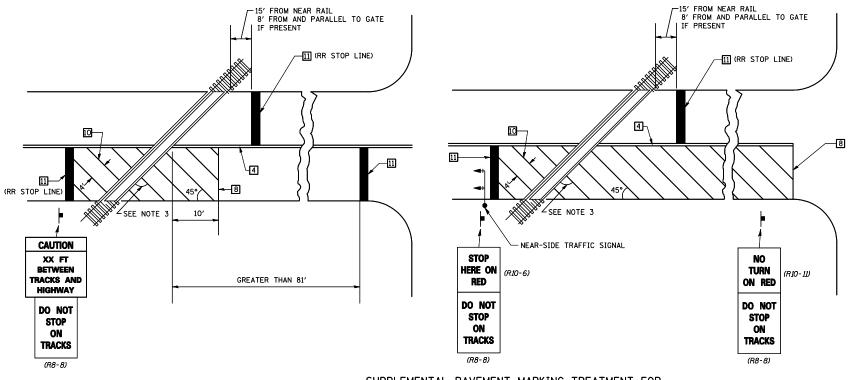

# SUPPLEMENTAL PAVEMENT MARKING TREATMENT FOR RAILROAD-HIGHWAY GRADE CROSSING

# 

SCALE:

# GENERAL NOTES

- SUPPLEMENTAL PAYEMENT MARKINGS TO BE INSTALLED ONLY ON APPROACHES TO INTERSECTIONS CONTROLLED BY TRAFFIC SIGNALS WHICH ARE INTERCONNECTED WITH THE RAILROAD WARNING SIGNALS.
- 2. EXTEND PAVEMENT MARKINGS TO THE INTERSECTION ONLY WHERE NEAR-SIDE TRAFFIC SIGNALS ARE USED.

TO STA.

3. WHERE THE ANGLE BETWEEN THE DIAGONAL PAVEMENT MARKINGS AND THE TRACK WOULD BE LESS THAN 20°, THE PAVEMENT MARKINGS SHOULD BE PLACED IN THE OPPOSITE DIRECTION FROM THAT SHOWN.

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

FED. ROAD DIST. NO. | ILLINOIS FED. AID PROJECT

				DIS	TRICT 5 DETA	IL NO. 78	00AA	AA
	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PAVEMENT MARKING AND MARKERS (RURAL & URBAN APPLICATIONS)	F	RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
				741	(8,9,10)CR	PIATT	65	43
		(11011111111111111111111111111111111111				CONTRAC	T NO. 7	'0800

SHEET NO. 4 OF 4 SHEETS STA.