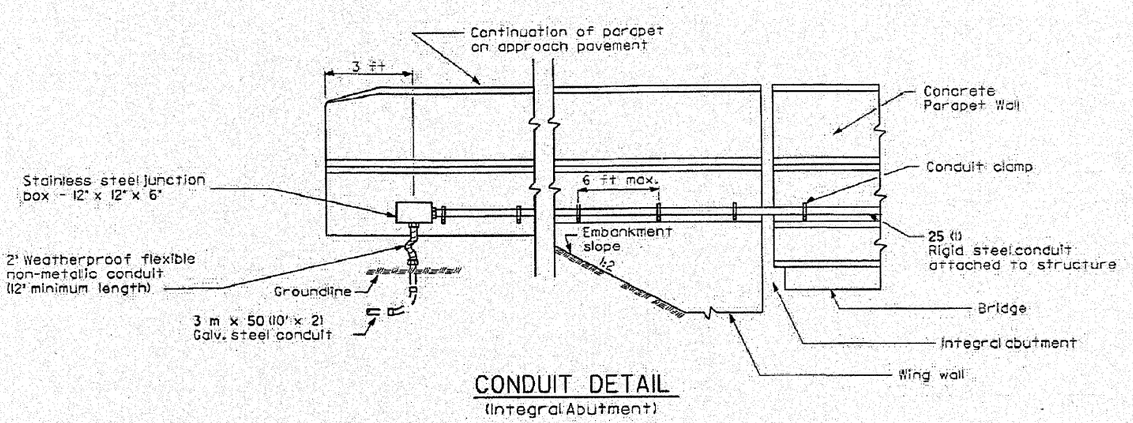

CONDUIT DETAIL
(Integral Abutment)

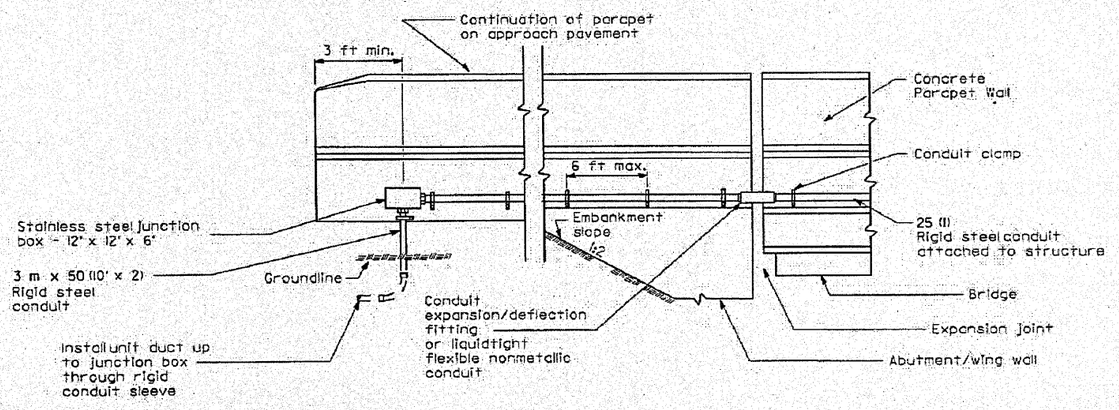

CONDUIT DETAIL
(Open Abutment)

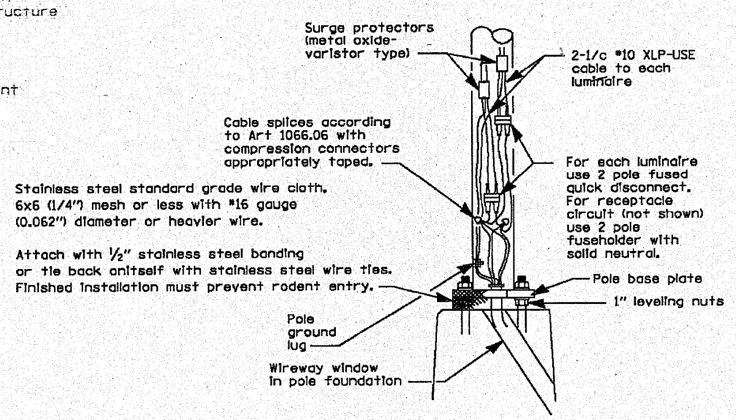

WIRING DETAIL
NO SCALE

GENERAL NOTES

All taped splices shall use 2 layers of electriod tape over 3 layers of rubber tape as required by the Standard Specifications. Coat the finished taped splice with bonding compound.

All cable splices shall be taped unless another method has been specifically approved by the Engineer.

For example purposes the pole is shown on an anchor base. If the pole is required to be set on a breakaway base, consult the Standard Specifications.

All dimensions are in millimeters (inches) unless otherwise shown.

FILENAME = gt\ch10\0847\road\C-CU-585-.dgn	USER NAME = ajpondexter	DESIGNED - KB	REVISED -
	PLOT DATE = 10/19/2010 2:32:54 PM	DRAWN - AJP	REVISED -
		CHECKED - SRF	REVISED -
		DATE - 5-21-10	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

LIGHTING DETAILS

SCALE: NONE | SHEET NO. OF SHEETS | STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
64	82-5K-2	ST. CLAIR	162	68
JOB NO. D-98-024-10		PTB NO. 153/053		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		