





© Copyright Hanson Professional Services, Inc. 2010

DITCH CHECK INSTALLATION


GEOTEXTILE TUBE FILLED WITH AGGREGATE

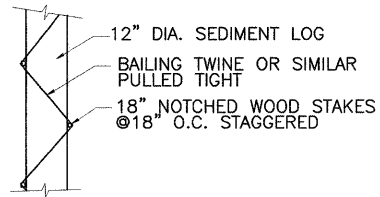

SEDIMENT LOG PLAN VIEW
NTS




ROC-SOC OR ROCK FILLED TUBE
NTS

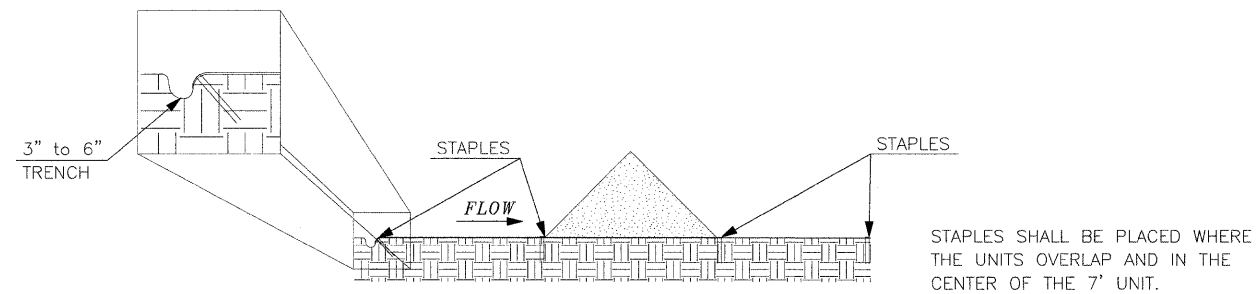

TRIANGULAR DITCH CHECK

SEDIMENT BARRIERS FOR CONCENTRATED FLOWS

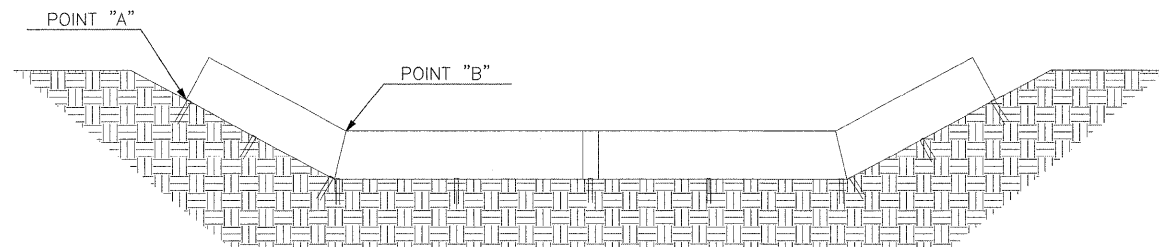

POINT "A" MUST BE 6" HIGHER THAN POINT "B" TO ENSURE THAT WATER FLOWS OVER THE DIKE AND NOT AROUND THE ENDS.

GENERAL LAYOUT OF DITCH CHECKS

LAYOUT	
DRAWN	
REVIEWED	

FILE NAME = C-102-ERO.dgn	USER NAME =	DESIGNED - DRAWN -	REVISED - REVISED -
MODEL NAME =	PLOT SCALE =	CHECKED - DATE -	REVISED - REVISED -
	PLOT DATE = 10/26/2010		

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**EROSION CONTROL PLAN (DETAILS)
KISHWAUKEE RIVER BRIDGE
WINNEBAGO COUNTY, IL**

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.U. RTE. 5103	SECTION 03-00337-00-BR	COUNTY WINNEBAGO	TOTAL SHEETS 66	SHEET NO. 13
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT			CONTRACT NO. 85523	