

04-23-2021 LETTING ITEM 025

PROJECT ENGINEER: KRISTIE NYDEREK

FOR INDEX OF SHEETS & STATE STANDARDS
SEE SHEET NO. 2

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS


**PROPOSED
HIGHWAY PLANS**

VARIOUS ROUTES
SECTION D2 SG 2021-1
VARIOUS COUNTIES
C-92-042-21

FA. RTE. VAR.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	D2 SG 2021-1	VARIOUS	30	1

CONTRACT NO. 64P68

D-92-007-21

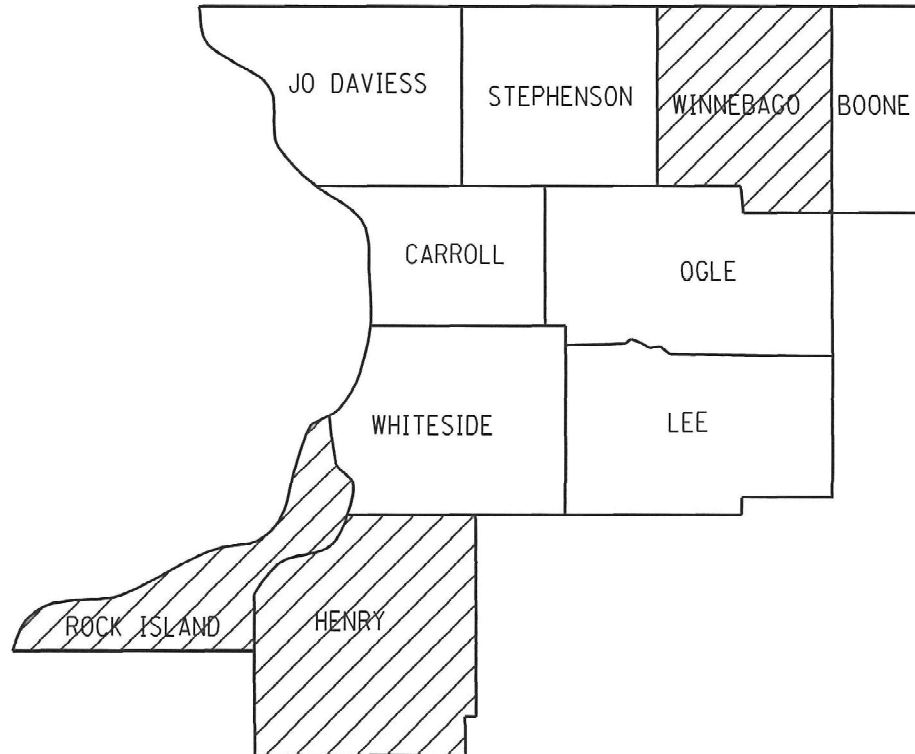

LOCATION OF SECTION INDICATED THIS: - [shaded box]

GROSS LENGTH OF PROJECT = 0 FT = 0.0 MILES
NET LENGTH OF PROJECT = 0 FT = 0.0 MILES

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

CONTRACT NO. 64P68

VARIOUS ROUTES

SECTION: D2 SG 2021-1

VARIOUS COUNTIES

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED January 27th 20 21

[Signature]
REGION ENGINEER

March 19, 2021
[Signature]
ENGINEER OF DESIGN AND ENVIRONMENT

March 19, 2021
[Signature]
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION 13

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

SQUAD LEADER: TROY EBENEZER

INDEX OF SHEETS

- 1 COVER SHEET
- 2 INDEX OF SHEETS, SUMMARY OF QUANTITIES, HIGHWAY STANDARDS, GENERAL NOTES
- 3-34 SCHEDULE OF SIGNING WORK

SUMMARY OF QUANTITIES

Code No.	Item	Unit	100% State
67100100	MOBILIZATION	L SUM	1
X7010216	TRAFFIC CONTROL & PROTECTION (SPECIAL)	L SUM	1
72000100	SIGN PANEL - TYPE 1	SQ FT	4441.44
72000200	SIGN PANEL - TYPE 2	SQ FT	12
72400310	REMOVE SIGN PANEL TYPE 1	SQ FT	257.01
72400710	RELOCATE SIGN PANEL TYPE 1	SQ FT	80.88
72800100	TELESCOPING STEEL SIGN SUPPORT	FOOT	7932
73000100	WOOD SIGN SUPPORT	FOOT	340
73100100	BASE FOR TELESCOPING STEEL SIGN SUPPORT	EACH	10
Z0051398	REMOVE EXISTING SIGN POST	EACH	5

HIGHWAY STANDARDS

- 701101-05 OFF-ROAD OPERATIONS, MULTILANE, 15' (4.5 M) TO 24" (600 MM) FROM PAVEMENT EDGE
- 701106-02 OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' (4.5 M) AWAY
- 701301-04 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
- 701306-04 LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS DAY ONLY, FOR SPEEDS > 45 MPH
- 701426-09 LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATION, FOR SPEEDS > 45 MPH
- 701427-05 LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATION, FOR SPEEDS < 40 MPH
- 701456-05 PARTIAL EXIT RAMP CLOSURE FREEWAY/EXPRESSWAY
- 701601-09 URBAN LANE CLOSURE, MULTILANE, 1W OR 2W WITH NONTRAVERSABLE MEDIAN
- 701602-10 URBAN LANE CLOSURE, MULTILANE, 2W WITH BIDIRECTIONAL LEFT TURN LANE
- 701606-10 URBAN SINGLE LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
- 701701-10 URBAN LANE CLOSURE, MULTILANE INTERSECTION
- 701901-08 TRAFFIC CONTROL DEVICES
- 720001-01 SIGN PANEL MOUNTING DETAILS
- 720006-04 SIGN PANEL ERECTION DETAILS
- 728001-01 TELESCOPING STEEL SIGN SUPPORT
- 720016-04 MAST ARM MOUNTED STREET NAME SIGNS

GENERAL NOTES

1. AN ELECTRONIC COPY OF THE COMPLETE SIGN INVENTORY WILL BE PROVIDED TO THE CONTRACTOR, UPON REQUEST.
2. LOCATIONS LISTED IN THE SCHEDULE OF QUANTITIES ARE APPROXIMATE. WORK ORDERS DETAILING EACH INDIVIDUAL SIGN ASSEMBLY SHALL BE PROVIDED AT THE PRECONSTRUCTION MEETING OR BEFORE.
3. SIGN DESIGNS FOR SPECIALTY SIGNS SHALL BE PROVIDED AT THE PRECONSTRUCTION MEETING OR BEFORE.
4. R15-I105 SIGNS (THE NOTICE OF FREEWAY SIGNS) SHALL NOT BE PLACED AS SHOWN ON STANDARD 720006. THESE SIGNS SHALL BE PLACED NEAR THE RIGHT OF WAY LINE, FACING THE ROADWAY.
5. BOLTS AND ANY WASHERS ON THE FRONT OF THE SIGN SHALL BE STAINLESS STEEL.
6. ANY SIGNING FOR PEDESTRIANS (EXAMPLE: W11-2) SHALL BE FLORESCENT YELLOW GREEN.
7. ALL BORROW/WASTE/USE SITES MUST BE APPROVED BY THE DEPARTMENT PRIOR TO REMOVING ANY MATERIAL FROM THE PROJECT OR INITIATING ANY EARTHMOVING ACTIVITIES, INCLUDING TEMPORARY, STOCKPILING OUTSIDE THE LIMITS OF CONSTRUCTION.
8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING AND PROTECTING UTILITY PROPERTY DURING SIGN INSTALLATIONS AS OUTLINED IN ARTICLE 107.39 OF THE STANDARD SPECIFICATIONS. A MINIMUM OF 48 HOURS ADVANCE NOTICE IS REQUIRED FOR NON-EMERGENCY WORK. THE JULIE NUMBER IS 800-892-0123.

IDOT IS NOT A MEMBER OF JULIE. IF YOU ARE NEAR ANY OVERHEAD LIGHTING, INTERSECTION LIGHTING OR TRAFFIC SIGNALS, CONTACT THE IDOT TRAFFIC OFFICE AT 815/284-5469 AT LEAST 48 HOURS PRIOR TO WORK.

MODEL: Defaulr
FILE NAME: S:\TRC\Contracts\Contracts for Letting\Signing\Contract\64P68\CADD_shts.dgn

USER NAME = ebenazertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, SUMMARY OF QUANTITIES, HIGHWAY STANDARDS AND GENERAL NOTES	F.A. RTE. _____	SECTION _____	COUNTY _____	TOTAL SHEETS _____	SHEET NO. _____	
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____			VAR _____	D2 SG 2021-1	VARIOUS	30	2	
PLOT DATE = Jan-25-2021 03:49:37 PM	DATE - _____	REVISED - _____			SCALE: _____	SHEET _____ OF _____ SHEETS	STA. _____ TO STA. _____	ILLINOIS FED. AID PROJECT		
CONTRACT NO. 64P68										

SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Relocate sign panel (sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Henry	I-74	8.00	Between Airport and I-80	Right	D10-4	18	54	6.75		2		12	5					East I-74 MM 8
Henry	I-74	8.00	Between Airport and I-80	Left	D10-4	18	54	6.75		2		12	5					West I-74 MM 8
Henry	I-74	8.20	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 8.2
Henry	I-74	8.20	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 8.2
Henry	I-74	8.40	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 8.4
Henry	I-74	8.40	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 8.4
Henry	I-74	8.60	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 8.6
Henry	I-74	8.60	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 8.6
Henry	I-74	8.80	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 8.8
Henry	I-74	8.80	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 8.8
Henry	I-74	9.00	Between Airport and I-80	Right	D10-4	18	54	6.75		2		12	5					East I-74 MM 9
Henry	I-74	9.00	Between Airport and I-80	Left	D10-4	18	54	6.75		2		12	5					West I-74 MM 9
Henry	I-74	9.20	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 9.2
Henry	I-74	9.20	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 9.2
Henry	I-74	9.40	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 9.4
Henry	I-74	9.40	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 9.4
Henry	I-74	9.60	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 9.6
Henry	I-74	9.60	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 9.6
Henry	I-74	9.80	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 9.8
Henry	I-74	9.80	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 9.8
Henry	I-74	10.00	Between Airport and I-80	Right	D10-4	18	54	6.75		3		12	5					East I-74 MM 10
Henry	I-74	10.00	Between Airport and I-80	Left	D10-4	18	54	6.75		3		12	5					West I-74 MM 10
Henry	I-74	10.20	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 10.2
Henry	I-74	10.20	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 10.2

MODEL: Default
FILE NAME: S:\ITV\Contracts\Contracts for Letting\Signage\Contracts\64P68\CADD_shts.dwg

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PLOT SCALE = 102.9963' / in.	DRAWN - _____	REVISED - _____		VAR	D2 SG 2021-1	VARIOUS	30	3				
PLOT DATE = Jan-25-2021 03:50:09 PM	CHECKED - _____	REVISED - _____		SCALE: _____	SHEET _____ OF _____ SHEETS	STA. _____ TO STA. _____	CONTRACT NO. 64P68					
DATE - _____	REVISED - _____	ILLINOIS FED. AID PROJECT										

SCHEDULE OF QUANTITIES

Henry	I-74	10.40	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 10.4
Henry	I-74	10.40	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 10.4
Henry	I-74	10.60	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 10.6
Henry	I-74	10.60	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 10.6
Henry	I-74	10.80	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 10.8
Henry	I-74	10.80	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 10.8
Henry	I-74	11.00	Between Airport and I-80	Right	D10-4	18	54	6.75		3		12	5					East I-74 MM 11
Henry	I-74	11.00	Between Airport and I-80	Left	D10-4	18	54	6.75		3		12	5					West I-74 MM 11
Henry	I-74	11.20	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 11.2
Henry	I-74	11.20	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 11.2
Henry	I-74	11.40	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 11.4
Henry	I-74	11.40	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 11.4
Henry	I-74	11.60	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 11.6
Henry	I-74	11.60	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 11.6
Henry	I-74	11.80	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 11.8
Henry	I-74	11.80	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 11.8
Henry	I-74	12.00	Between Airport and I-80	Right	D10-4	18	54	6.75		3		12	5					East I-74 MM 12
Henry	I-74	12.00	Between Airport and I-80	Left	D10-4	18	54	6.75		3		12	5					West I-74 MM 12
Henry	I-74	12.20	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 12.2
Henry	I-74	12.20	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 12.2
Henry	I-74	12.40	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 12.4
Henry	I-74	12.40	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 12.4
Henry	I-74	12.60	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 12.6
Henry	I-74	12.60	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 12.6
Henry	I-74	12.80	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 12.8
Henry	I-74	12.80	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 12.8
Henry	I-74	13.00	Between Airport and I-80	Right	D10-4	18	54	6.75		3		12	5					East I-74 MM 13
Henry	I-74	13.00	Between Airport and I-80	Left	D10-4	18	54	6.75		3		12	5					West I-74 MM 13
Henry	I-74	13.20	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 13.2
Henry	I-74	13.20	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 13.2

MODEL: Default
FILE NAME: S:\ITC\Contracts\Contracts for Letting\Signin\Contract\64P68\CADD_sns.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PLOT SCALE = 102.9983' / in.	CHECKED - _____	REVISED - _____		SCALE: _____	SHEET _____	OF _____	SHEETS	STA. _____	TO STA. _____	VARIOUS	30	4
PLOT DATE = Jan-25-2021 03:50:17 PM	DATE - _____	REVISED - _____		CONTRACT NO. 64P68								
ILLINOIS FED. AID PROJECT												

SCHEDULE OF QUANTITIES

Henry	I-74	13.40	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 13.4
Henry	I-74	13.40	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 13.4
Henry	I-74	13.60	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 13.6
Henry	I-74	13.60	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 13.6
Henry	I-74	13.80	Between Airport and I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 13.8
Henry	I-74	13.80	Between Airport and I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 13.8
Henry	I-74	14.00	South of I-80	Right	D10-4	18	54	6.75		3		12	5					East I-74 MM 14
Henry	I-74	14.00	South of I-80	Left	D10-4	18	54	6.75		3		12	5					West I-74 MM 14
Henry	I-74	14.20	South of I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 14.2
Henry	I-74	14.20	South of I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 14.2
Henry	I-74	14.40	South of I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 14.4
Henry	I-74	14.40	South of I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 14.4
Henry	I-74	14.60	South of I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 14.6
Henry	I-74	14.60	South of I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 14.6
Henry	I-74	14.80	South of I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 14.8
Henry	I-74	14.80	South of I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 14.8
Henry	I-74	15.00	South of I-80	Right	D10-4	18	54	6.75		3		12	5					East I-74 MM 15
Henry	I-74	15.00	South of I-80	Left	D10-4	18	54	6.75		3		12	5					West I-74 MM 15
Henry	I-74	15.20	South of I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 15.2
Henry	I-74	15.20	South of I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 15.2
Henry	I-74	15.40	South of I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 15.4
Henry	I-74	15.40	South of I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 15.4
Henry	I-74	15.60	South of I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 15.6
Henry	I-74	15.60	South of I-80	Left	D10-5	18	60	7.50				12	5					West I-74 MM 15.6
Henry	I-74	15.80	South of I-80	Right	D10-5	18	60	7.50				12	5					East I-74 MM 15.8

MODEL: Default
FILE NAME: S:\TR\Contracts\Contracts for Letting\Simmon Contracts\64P68\64P68 CAD\0 shts.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES				F.A. _____	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
PLOT SCALE = 102.9963' / in.	DRAWN - _____	REVISED - _____		SCALE: _____	SHEET _____	OF _____	SHEETS	STA. _____	TO STA. _____	VAR	D2 SG 2021-1	VARIOUS	30	5
PLOT DATE = Jan-25-2021 03:50:23 PM	CHECKED - _____	REVISED - _____		CONTRACT NO. 64P68										
	DATE - _____	REVISED - _____		ILLINOIS FED. AID PROJECT										

SCHEDULE OF QUANTITIES

Henry	I-74	15.80	South of I-80	Left	D10-5	18	60	7.50			12	5					West I-74 MM 15.8
Henry	I-80	5.60	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5					East I-80 MM 5.6
Henry	I-80	5.60	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5					West I-80 MM 5.6
Henry	I-80	5.80	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5					East I-80 MM 5.8
Henry	I-80	5.80	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5					West I-80 MM 5.8
Henry	I-80	6.00	Between I-88 and I-280	Right	D10-4	18	54	6.75	2		12	5					East I-80 MM 6
Henry	I-80	6.00	Between I-88 and I-280	Left	D10-4	18	54	6.75	2		12	5					West I-80 MM 6
Henry	I-80	6.20	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5					East I-80 MM 6.2
Henry	I-80	6.20	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5					West I-80 MM 6.2
Henry	I-80	6.40	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5					East I-80 MM 6.4
Henry	I-80	6.40	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5					West I-80 MM 6.4
Henry	I-80	6.60	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5					East I-80 MM 6.6
Henry	I-80	6.60	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5					West I-80 MM 6.6
Henry	I-80	6.80	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5					East I-80 MM 6.8
Henry	I-80	6.80	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5					West I-80 MM 6.8
Henry	I-80	7.00	Between I-88 and I-280	Right	D10-4	18	54	6.75	2		12	5					East I-80 MM 7
Henry	I-80	7.00	Between I-88 and I-280	Left	D10-4	18	54	6.75	2		12	5					West I-80 MM 7
Henry	I-80	7.20	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5					East I-80 MM 7.2
Henry	I-80	7.20	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5					West I-80 MM 7.2
Henry	I-80	7.40	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5					East I-80 MM 7.4
Henry	I-80	7.40	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5					West I-80 MM 7.4
Henry	I-80	7.60	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5					East I-80 MM 7.6
Henry	I-80	7.60	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5					West I-80 MM 7.6
Henry	I-80	7.80	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5					East I-80 MM 7.8
Henry	I-80	7.80	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5					West I-80 MM 7.8

MODEL: Default
FILE NAME: S:\ITL\Contracts\Contracts for Letting\Stinson_Contract\64P68\64P68_CADD_xrts.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES	F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____			VAR	D2 SG 2021-1	VARIOUS	30	6	
PLOT DATE = Jan-25-2021 03:50:32 PM	DATE - _____	REVISED - _____			SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____		ILLINOIS FED. AID PROJECT			
					CONTRACT NO. 64P68					

SCHEDULE OF QUANTITIES

Henry	I-80	8.00	Between I-88 and I-280	Right	D10-4	18	54	6.75		2	12	5							East I-80 MM 8
Henry	I-80	8.00	Between I-88 and I-280	Left	D10-4	18	54	6.75		2	12	5							West I-80 MM 8
Henry	I-80	8.20	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5							East I-80 MM 8.2
Henry	I-80	8.20	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5							West I-80 MM 8.2
Henry	I-80	8.40	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5							East I-80 MM 8.4
Henry	I-80	8.40	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5							West I-80 MM 8.4
Henry	I-80	8.60	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5							East I-80 MM 8.6
Henry	I-80	8.60	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5							West I-80 MM 8.6
Henry	I-80	8.80	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5							East I-80 MM 8.8
Henry	I-80	8.80	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5							West I-80 MM 8.8
Henry	I-80	9.00	Between I-88 and I-280	Right	D10-4	18	54	6.75		2	12	5							East I-80 MM 9
Henry	I-80	9.00	Between I-88 and I-280	Left	D10-4	18	54	6.75		2	12	5							West I-80 MM 9
Henry	I-80	9.20	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5							East I-80 MM 9.2
Henry	I-80	9.20	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5							West I-80 MM 9.2
Henry	I-80	9.40	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5							East I-80 MM 9.4
Henry	I-80	9.40	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5							West I-80 MM 9.4
Henry	I-80	9.60	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5							East I-80 MM 9.6
Henry	I-80	9.60	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5							West I-80 MM 9.6
Henry	I-80	9.80	Between I-88 and I-280	Right	D10-5	18	60	7.50			12	5							East I-80 MM 9.8
Henry	I-80	9.80	Between I-88 and I-280	Left	D10-5	18	60	7.50			12	5							West I-80 MM 9.8
Henry	I-80	10.00	Between I-88 and I-280	Right	D10-4	18	54	6.75		3	12	5							East I-80 MM 10
Henry	I-80	10.00	Between I-88 and I-280	Left	D10-4	18	54	6.75		3	12	5							West I-80 MM 10
Henry	I-80	10.20	East of I-74	Right	D10-5	18	60	7.50			12	5							East I-80 MM 10.2

MODEL: Default
FILE NAME: S:\TR\Contracts\Contracts for Letting\Simms Contracts\64P68\CADD shts.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Jan-25-2021 03:50:43 PM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES

SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2021-1	VARIOUS	30	7
			CONTRACT NO. 64P68	
ILLINOIS FED. AID PROJECT				

SCHEDULE OF QUANTITIES

Henry	I-80	10.20	East of I-74	Left	D10-5	18	60	7.50				12	5					West I-80 MM 10.2
Henry	I-80	10.40	East of I-74	Right	D10-5	18	60	7.50				12	5					East I-80 MM 10.4
Henry	I-80	10.40	East of I-74	Left	D10-5	18	60	7.50				12	5					West I-80 MM 10.4
Henry	I-80	10.60	East of I-74	Right	D10-5	18	60	7.50				12	5					East I-80 MM 10.6
Henry	I-80	10.60	East of I-74	Left	D10-5	18	60	7.50				12	5					West I-80 MM 10.6
Henry	I-80	10.80	East of I-74	Right	D10-5	18	60	7.50				12	5					East I-80 MM 10.8
Henry	I-80	10.80	East of I-74	Left	D10-5	18	60	7.50				12	5					West I-80 MM 10.8
Henry	I-80	11.00	East of I-74	Right	D10-4	18	54	6.75		3		12	5					East I-80 MM 11
Henry	I-80	11.00	East of I-74	Left	D10-4	18	54	6.75		3		12	5					West I-80 MM 11
Henry	I-80	11.20	East of I-74	Right	D10-5	18	60	7.50				12	5					East I-80 MM 11.2
Henry	I-80	11.20	East of I-74	Left	D10-5	18	60	7.50				12	5					West I-80 MM 11.2
Henry	I-80	11.40	East of I-74	Right	D10-5	18	60	7.50				12	5					East I-80 MM 11.4
Henry	I-80	11.40	East of I-74	Left	D10-5	18	60	7.50				12	5					West I-80 MM 11.4
Henry	I-80	11.60	East of I-74	Right	D10-5	18	60	7.50				12	5					East I-80 MM 11.6
Henry	I-80	11.60	East of I-74	Left	D10-5	18	60	7.50				12	5					West I-80 MM 11.6
Henry	I-80	11.80	East of I-74	Right	D10-5	18	60	7.50				12	5					East I-80 MM 11.8
Henry	I-80	11.80	East of I-74	Left	D10-5	18	60	7.50				12	5					West I-80 MM 11.8
Rock Island	I-74	3.20	North of I-280	Right	D10-5	18	60	7.50				12	5					East I-74 MM 3.2
Rock Island	I-74	3.20	North of I-280	Left	D10-5	18	60	7.50				12	5					West I-74 MM 3.2
Rock Island	I-74	3.40	North of I-280	Right	D10-5	18	60	7.50				12	5					East I-74 MM 3.4
Rock Island	I-74	3.40	North of I-280	Left	D10-5	18	60	7.50				12	5					West I-74 MM 3.4
Rock Island	I-74	3.60	North of I-280	Right	D10-5	18	60	7.50				12	5					East I-74 MM 3.6
Rock Island	I-74	3.60	North of I-280	Left	D10-5	18	60	7.50				12	5					West I-74 MM 3.6
Rock Island	I-74	3.80	North of I-280	Right	D10-5	18	60	7.50				12	5					East I-74 MM 3.8
Rock Island	I-74	3.80	North of I-280	Left	D10-5	18	60	7.50				12	5					West I-74 MM 3.8
Rock Island	I-74	4.00	North of I-280	Right	D10-4	18	54	6.75		2		12	5					East I-74 MM 4
Rock Island	I-74	4.00	North of I-280	Left	D10-4	18	54	6.75		2		12	5					West I-74 MM 4

MODEL: Delawil
FILE NAME: S:\TR\Contracts\Contracts for Letting\Shimino Contracts\64P68\64P68 CADD.sht.dwg

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES	F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____			VAR	D2 SG 2021-1	VARIOUS	30	8
PLOT DATE = Jan-25-2021 03:54:46 PM	DATE - _____	REVISED - _____			SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____		ILLINOIS FED. AID PROJECT CONTRACT NO. 64P68		

SCHEDULE OF QUANTITIES

Rock Island	I-80	1.60	Between Mississippi R and I-88	Left	D10-5	18	60	7.50				12	5					West I-80 MM 1.6
Rock Island	I-80	1.80	Between Mississippi R and I-88	Right	D10-5	18	60	7.50				12	5					East I-80 MM 1.8
Rock Island	I-80	1.80	Between Mississippi R and I-88	Left	D10-5	18	60	7.50				12	5					West I-80 MM 1.8
Rock Island	I-80	2.00	Between Mississippi R and I-88	Right	D10-4	18	54	6.75		2		12	5					East I-80 MM 2
Rock Island	I-80	2.00	Between Mississippi R and I-88	Left	D10-4	18	54	6.75		2		12	5					West I-80 MM 2
Rock Island	I-80	2.20	Between Mississippi R and I-88	Right	D10-5	18	60	7.50				12	5					East I-80 MM 2.2
Rock Island	I-80	2.20	Between Mississippi R and I-88	Left	D10-5	18	60	7.50				12	5					West I-80 MM 2.2
Rock Island	I-80	2.40	Between Mississippi R and I-88	Right	D10-5	18	60	7.50				12	5					East I-80 MM 2.4
Rock Island	I-80	2.40	Between Mississippi R and I-88	Left	D10-5	18	60	7.50				12	5					West I-80 MM 2.4
Rock Island	I-80	2.60	Between Mississippi R and I-88	Right	D10-5	18	60	7.50				12	5					East I-80 MM 2.6
Rock Island	I-80	2.60	Between Mississippi R and I-88	Left	D10-5	18	60	7.50				12	5					West I-80 MM 2.6
Rock Island	I-80	2.80	Between Mississippi R and I-88	Right	D10-5	18	60	7.50				12	5					East I-80 MM 2.8
Rock Island	I-80	2.80	Between Mississippi R and I-88	Left	D10-5	18	60	7.50				12	5					West I-80 MM 2.8
Rock Island	I-80	3.00	Between Mississippi R and I-88	Right	D10-4	18	54	6.75		2		12	5					East I-80 MM 3
Rock Island	I-80	3.00	Between Mississippi R and I-88	Left	D10-4	18	54	6.75		2		12	5					West I-80 MM 3
Rock Island	I-80	3.20	Between Mississippi R and I-88	Right	D10-5	18	60	7.50				12	5					East I-80 MM 3.2
Rock Island	I-80	3.20	Between Mississippi R and I-88	Left	D10-5	18	60	7.50				12	5					West I-80 MM 3.2
Rock Island	I-80	3.40	Between Mississippi R and I-88	Right	D10-5	18	60	7.50				12	5					East I-80 MM 3.4
Rock Island	I-80	3.40	At I-88	Left	D10-5	18	60	7.50				12	5					West I-80 MM 3.4
Rock Island	I-80	3.60	At I-88	Right	D10-5	18	60	7.50				12	5					East I-80 MM 3.6
Rock Island	I-80	3.60	South of I-88	Left	D10-5	18	60	7.50				12	5					West I-80 MM 3.6
Rock Island	I-80	3.80	South of I-88	Right	D10-5	18	60	7.50				12	5					East I-80 MM 3.8
Rock Island	I-80	3.80	South of I-88	Left	D10-5	18	60	7.50				12	5					West I-80 MM 3.8
Rock Island	I-80	4.00	South of I-88	Right	D10-4	18	54	6.75		2		12	5					East I-80 MM 4
Rock Island	I-80	4.00	South of I-88	Left	D10-4	18	54	6.75		2		12	5					West I-80 MM 4

MODEL: Default
 FILE NAME: S:\TR\Contracts\Contracts for Letting\Spring Contracts\64P68\CADD_shts.dwg

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____
DRAWN - _____	CHECKED - _____	REVISED - _____
PLOT SCALE = 102.9963' / in.	DATE - _____	REVISED - _____
PLOT DATE = Jan-25-2021 03:51:10 PM		

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES

SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2021-1	VARIOUS	30	11
CONTRACT NO. 64P68			ILLINOIS FED. AID PROJECT	

SCHEDULE OF QUANTITIES

Rock Island	I-80	4.20	South of I-88	Right	D10-5	18	60	7.50			12	5						East I-80 MM 4.2
Rock Island	I-80	4.20	South of I-88	Left	D10-5	18	60	7.50			12	5						West I-80 MM 4.2
Rock Island	I-80	4.40	South of I-88	Right	D10-5	18	60	7.50			12	5						East I-80 MM 4.4
Rock Island	I-80	4.40	South of I-88	Left	D10-5	18	60	7.50			12	5						West I-80 MM 4.4
Rock Island	I-80	4.60	South of I-88	Right	D10-5	18	60	7.50			12	5						East I-80 MM 4.6
Rock Island	I-80	4.60	South of I-88	Left	D10-5	18	60	7.50			12	5						West I-80 MM 4.6
Rock Island	I-80	4.80	South of I-88	Right	D10-5	18	60	7.50			12	5						East I-80 MM 4.8
Rock Island	I-80	4.80	South of I-88	Left	D10-5	18	60	7.50			12	5						West I-80 MM 4.8
Rock Island	I-80	5.00	South of I-88	Right	D10-4	18	54	6.75	2		12	5						East I-80 MM 5
Rock Island	I-80	5.00	South of I-88	Left	D10-4	18	54	6.75	2		12	5						West I-80 MM 5
Rock Island	I-80	5.20	South of I-88	Right	D10-5	18	60	7.50			12	5						East I-80 MM 5.2
Rock Island	I-80	5.20	South of I-88	Left	D10-5	18	60	7.50			12	5						West I-80 MM 5.2
Rock Island	I-80	5.40	South of I-88	Right	D10-5	18	60	7.50			12	5						East I-80 MM 5.4
Rock Island	I-80	5.40	South of I-88	Left	D10-5	18	60	7.50			12	5						West I-80 MM 5.4
Rock Island	I-88	0.20	East of I-80	Right	D10-5	18	60	7.50			12	5						East I-88 MM 0.2
Rock Island	I-88	0.20	East of I-80	Left	D10-5	18	60	7.50			12	5						West I-88 MM 0.2
Rock Island	I-88	0.40	East of I-80	Right	D10-5	18	60	7.50			12	5						East I-88 MM 0.4
Rock Island	I-88	0.40	East of I-80	Left	D10-5	18	60	7.50			12	5						West I-88 MM 0.4
Rock Island	I-88	0.60	East of I-80	Right	D10-5	18	60	7.50			12	5						East I-88 MM 0.6
Rock Island	I-88	0.60	East of I-80	Left	D10-5	18	60	7.50			12	5						West I-88 MM 0.6
Rock Island	I-88	0.80	East of I-80	Right	D10-5	18	60	7.50			12	5						East I-88 MM 0.8
Rock Island	I-88	0.80	East of I-80	Left	D10-5	18	60	7.50			12	5						West I-88 MM 0.8
Rock Island	I-88	1.00	East of I-80	Right	D10-4	18	54	6.75	2		12	5						East I-88 MM 1
Rock Island	I-88	1.00	East of I-80	Left	D10-4	18	54	6.75	2		12	5						West I-88 MM 1
Rock Island	I-88	1.20	East of I-80	Right	D10-5	18	60	7.50			12	5						East I-88 MM 1.2
Rock Island	I-88	1.20	East of I-80	Left	D10-5	18	60	7.50			12	5						West I-88 MM 1.2
Rock Island	I-88	1.40	East of I-80	Right	D10-5	18	60	7.50			12	5						East I-88 MM 1.4

MODEL: Default
FILE NAME: S:\TR\Contracts\Contracts for Letting\Signing Contracts\64P68 CAD.DWG CADD.shts.dwg

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
PLOT SCALE = 102.9963 ' / in.	CHECKED - _____	REVISED - _____			VAR	D2 SG 2021-1	VARIOUS	30	12	
PLOT DATE = Jan-25-2021 03:51:17 PM	DATE - _____	REVISED - _____			SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____		CONTRACT NO. 64P68			
					ILLINOIS FED. AID PROJECT					

SCHEDULE OF QUANTITIES

Rock Island	I-88	1.40	East of I-80	Left	D10-5	18	60	7.50			12	5					West I-88 MM 1.4
Rock Island	I-88	1.60	East of I-80	Right	D10-5	18	60	7.50			12	5					East I-88 MM 1.6
Rock Island	I-88	1.60	East of I-80	Left	D10-5	18	60	7.50			12	5					West I-88 MM 1.6
Rock Island	I-88	1.80	East of I-80	Right	D10-5	18	60	7.50			12	5					East I-88 MM 1.8
Rock Island	I-88	1.80	East of I-80	Left	D10-5	18	60	7.50			12	5					West I-88 MM 1.8
Rock Island	I-280	11.60	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50			12	5					East I-280 MM 11.6
Rock Island	I-280	11.60	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50			12	5					West I-280 MM 11.6
Rock Island	I-280	11.80	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50			12	5					East I-280 MM 11.8
Rock Island	I-280	11.80	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50			12	5					West I-280 MM 11.8
Rock Island	I-280	12.00	Between IL 92 and Airport Rd	Right	D10-4	18	54	6.75	3		12	5					East I-280 MM 12
Rock Island	I-280	12.00	Between IL 92 and Airport Rd	Left	D10-4	18	54	6.75	3		12	5					West I-280 MM 12
Rock Island	I-280	12.20	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50			12	5					East I-280 MM 12.2
Rock Island	I-280	12.20	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50			12	5					West I-280 MM 12.2
Rock Island	I-280	12.40	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50			12	5					East I-280 MM 12.4
Rock Island	I-280	12.40	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50			12	5					West I-280 MM 12.4
Rock Island	I-280	12.60	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50			12	5					East I-280 MM 12.6
Rock Island	I-280	12.60	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50			12	5					West I-280 MM 12.6
Rock Island	I-280	12.80	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50			12	5					East I-280 MM 12.8
Rock Island	I-280	12.80	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50			12	5					West I-280 MM 12.8
Rock Island	I-280	13.00	Between IL 92 and Airport Rd	Right	D10-4	18	54	6.75	3		12	5					East I-280 MM 13
Rock Island	I-280	13.00	Between IL 92 and Airport Rd	Left	D10-4	18	54	6.75	3		12	5					West I-280 MM 13
Rock Island	I-280	13.20	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50			12	5					East I-280 MM 13.2
Rock Island	I-280	13.20	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50			12	5					West I-280 MM 13.2
Rock Island	I-280	13.40	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50			12	5					East I-280 MM 13.4
Rock Island	I-280	13.40	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50			12	5					West I-280 MM 13.4

MODEL: Default
FILE NAME: S:\ITR\Contracts\Contracts for Letting\Signing Contracts\64P68\64P68_CADD_SHS.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Jan-25-2023 03:51:24 PM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES	
SCALE: _____	SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2021-1	VARIOUS	30	13
CONTRACT NO. 64P68			ILLINOIS FED. AID PROJECT	

SCHEDULE OF QUANTITIES

Rock Island	I-280	13.60	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50				12	5					East I-280 MM 13.6
Rock Island	I-280	13.60	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50				12	5					West I-280 MM 13.6
Rock Island	I-280	13.80	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50				12	5					East I-280 MM 13.8
Rock Island	I-280	13.80	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50				12	5					West I-280 MM 13.8
Rock Island	I-280	14.00	Between IL 92 and Airport Rd	Right	D10-4	18	54	6.75		3		12	5					East I-280 MM 14
Rock Island	I-280	14.00	Between IL 92 and Airport Rd	Left	D10-4	18	54	6.75		3		12	5					West I-280 MM 14
Rock Island	I-280	14.20	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50				12	5					East I-280 MM 14.2
Rock Island	I-280	14.20	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50				12	5					West I-280 MM 14.2
Rock Island	I-280	14.40	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50				12	5					East I-280 MM 14.4
Rock Island	I-280	14.40	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50				12	5					West I-280 MM 14.4
Rock Island	I-280	14.60	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50				12	5					East I-280 MM 14.6
Rock Island	I-280	14.60	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50				12	5					West I-280 MM 14.6
Rock Island	I-280	14.80	Between IL 92 and Airport Rd	Right	D10-5	18	60	7.50				12	5					East I-280 MM 14.8
Rock Island	I-280	14.80	Between IL 92 and Airport Rd	Left	D10-5	18	60	7.50				12	5					West I-280 MM 14.8
Rock Island	I-280	15.00	At Airport Rd	Right	D10-4	18	54	6.75		3		12	5					East I-280 MM 15
Rock Island	I-280	15.00	At Airport Rd	Left	D10-4	18	54	6.75		3		12	5					West I-280 MM 15
Rock Island	I-280	15.20	Between Airport and I-74	Right	D10-5	18	60	7.50				12	5					East I-280 MM 15.2
Rock Island	I-280	15.20	Between Airport and I-74	Left	D10-5	18	60	7.50				12	5					West I-280 MM 15.2
Rock Island	I-280	15.40	Between Airport and I-74	Right	D10-5	18	60	7.50				12	5					East I-280 MM 15.4
Rock Island	I-280	15.40	Between Airport and I-74	Left	D10-5	18	60	7.50				12	5					West I-280 MM 15.4
Rock Island	I-280	15.60	Between Airport and I-74	Right	D10-5	18	60	7.50				12	5					East I-280 MM 15.6
Rock Island	I-280	15.60	Between Airport and I-74	Left	D10-5	18	60	7.50				12	5					West I-280 MM 15.6
Rock Island	I-280	15.80	Between Airport and I-74	Right	D10-5	18	60	7.50				12	5					East I-280 MM 15.8
Rock Island	I-280	15.80	Between Airport and I-74	Left	D10-5	18	60	7.50				12	5					West I-280 MM 15.8
Rock Island	I-280	16.00	At Airport Rd	Right	D10-4	18	54	6.75		3		12	5					East I-280 MM 16
Rock Island	I-280	16.00	At Airport Rd	Left	D10-4	18	54	6.75		3		12	5					West I-280 MM 16
Rock Island	I-280	16.20	Between Airport and I-74	Right	D10-5	18	60	7.50				12	5					East I-280 MM 16.2
Rock Island	I-280	16.20	Between Airport and I-74	Left	D10-5	18	60	7.50				12	5					West I-280 MM 16.2

MODEL: Default
FILE NAME: S:\TDC\contracts\contracts for Letting\Spinning Contracts\64P68\CADD_CADD.shrs.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____
DRAWN - _____	REVISIONS - _____	
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Jan-25-2021 03:51:30 PM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES

SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2021-1	VARIOUS	30	14
CONTRACT NO. 64P68			ILLINOIS FED. AID PROJECT	

SCHEDULE OF QUANTITIES

Rock Island	I-280	16.40	Between Airport and I-74	Right	D10-5	18	60	7.50			12	5							East I-280 MM 16.4
Rock Island	I-280	16.40	Between Airport and I-74	Left	D10-5	18	60	7.50			12	5							West I-280 MM 16.4
Rock Island	I-280	16.60	Between Airport and I-74	Right	D10-5	18	60	7.50			12	5							East I-280 MM 16.6
Rock Island	I-280	16.60	Between Airport and I-74	Left	D10-5	18	60	7.50			12	5							West I-280 MM 16.6
Rock Island	I-280	16.80	Between Airport and I-74	Right	D10-5	18	60	7.50			12	5							East I-280 MM 16.8
Rock Island	I-280	16.80	Between Airport and I-74	Left	D10-5	18	60	7.50			12	5							West I-280 MM 16.8
Rock Island	I-280	17.00	At Airport Rd	Right	D10-4	18	54	6.75	3		12	5							East I-280 MM 17
Rock Island	I-280	17.00	At Airport Rd	Left	D10-4	18	54	6.75	3		12	5							West I-280 MM 17
Rock Island	I-280	17.20	Between Airport Rd and I-74 N	Right	D10-5	18	60	7.50			12	5							East I-280 MM 17.2
Rock Island	I-280	17.20	Between Airport Rd and I-74 N	Left	D10-5	18	60	7.50			12	5							West I-280 MM 17.2
Rock Island	I-280	17.40	Between Airport Rd and I-74 N	Right	D10-5	18	60	7.50			12	5							East I-280 MM 17.4
Rock Island	I-280	17.40	Between Airport Rd and I-74 N	Left	D10-5	18	60	7.50			12	5							West I-280 MM 17.4
Rock Island	I-280	17.60	Between Airport Rd and I-74 N	Right	D10-5	18	60	7.50			12	5							East I-280 MM 17.6
Rock Island	I-280	17.60	Between Airport Rd and I-74 N	Left	D10-5	18	60	7.50			12	5							West I-280 MM 17.6
Rock Island	I-280	17.80	Between Airport Rd and I-74 N	Right	D10-5	18	60	7.50			12	5							East I-280 MM 17.8
Rock Island	I-280	17.80	Between Airport Rd and I-74 N	Left	D10-5	18	60	7.50			12	5							West I-280 MM 17.8
Rock Island	IL 92	30.37	East of US 67 - Rock Island City	Left	R2-1 (30)	30	36	7.50											1
Rock Island	IL 92	30.39	East of US 67 - Rock Island City	Left	W6-1	36	36	9.00											1
Rock Island	IL 92	30.62	East of US 67 - Rock Island City	Right	W6-1	36	36	9.00											1
Rock Island	IL 92	30.63	East of US 67 - Rock Island City	Median	R4-7	24	30	5.00			9	5							
					OM3	12	36	3.00											
Rock Island	IL 92	30.64	East of US 67 - at 20th St	Median	R4-7	24	30	5.00			9	5							
Rock Island	IL 92	30.66	East of US 67 - at 20th St	Median	OM3	12	36	3.00			9	5							
Rock Island	IL 92	30.93	At the Arsenal Bridge	Median	OM3	12	36	3.00			9	5							
Rock Island	IL 92	30.93	At the Arsenal Bridge	Left	D3-3	48	18	6.00											1
																			24th St

MODEL: Default
FILE NAME: S:\IT\Contracts\Contracts for Letting\Shinn Contract\64P68\64P68_CADD.shts.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Jan-25-2021 03:51:37 PM	DATE - _____	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULE OF QUANTITIES

SCALE: _____ SHEET ___ OF ___ SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2021-1	VARIOUS	30	15
CONTRACT NO. 64P68			ILLINOIS FED. AID PROJECT	

SCHEDULE OF QUANTITIES

Rock Island	IL 92	30.93	At the Arsenal Bridge	Right	D3-3	48	18	6.00								1			IL Rte 92
Rock Island	IL 92	30.93	At the Arsenal Bridge	Right	D3-3	48	18	6.00								1			24th St
Rock Island	IL 92	30.93	At the Arsenal Bridge	Median	R4-7	24	30	5.00				9	5						
Rock Island	IL 92	31.01	Between Arsenal Br & 4 th Ave	Median	R4-7	24	30	5.00				9	5						
Rock Island	IL 92	31.03	Between Arsenal Br & 4 th Ave	Left	R2-1 (30)	30	36	7.50				10					1		
Rock Island	IL 92	31.05	Between Arsenal Br & 4 th Ave	Left	M3-4	24	12	2.00				10					1		IL 92
					M1-1100	24	24	4.00											
Rock Island	IL 92	31.06	At 4th Ave and 24th St	Left	R6-1L	36	12	3.00									1		
					R6-1R	36	12	3.00									1		
Rock Island	IL 92	31.06	At 4th Ave and 24th St	Left	R6-1L	36	12	3.00									1		
Rock Island	IL 92	31.06	At 4th Ave and 24th St	Left	R3-1	30	30	6.25									1		
Rock Island	IL 92	31.08	Between 4th Ave and 5th Ave	Right	R3-7L	30	30	6.25				10					1		
Rock Island	IL 92	31.10	Between 4th Ave and 5th Ave	Right	M3-2	24	12	2.00				12	5						IL 92
					M1-1100	24	24	4.00											
					M5-1L	21	15	2.19											
Rock Island	IL 92	31.12	At 5th Ave	Right	R6-1R	36	12	3.00									1		
Rock Island	IL 92	31.12	At 5th Ave	Left	R3-2	30	30	6.25									1		
Rock Island	IL 92	31.15	5th Ave - east of 24th St	Right	M3-2	24	12	2.00				11	5						IL 92
					M1-1100	24	24	4.00											
Rock Island	IL 92	31.15	5th Ave - east of 24th St	Left	M3-2	24	12	2.00									1		
					M1-1100	24	24	4.00									1		IL 92
Rock Island	IL 92	31.16	5th Ave - east of 24th St	Left	R3-7L	30	30	6.25										1	
Rock Island	IL 92	31.17	5th Ave - east of 24th St	Right	R2-1 (30)	30	36	7.50									1		
Rock Island	IL 92	31.29	Between 26th St and 30th St	Right	R2-1 (30)	30	36	7.50									1		
Rock Island	IL 92	31.31	Between 26th St and 30th St	Median	R4-7	24	30	5.00				9	5						
Rock Island	IL 92	31.32	Between 26th St and 30th St	Median	OM3	12	36	3.00				9	5						
Rock Island	IL 92	31.34	Between 26th St and 30th St	Median	R4-7	24	30	5.00				9	5						
Rock Island	IL 92	31.34	Between 26th St and 30th St	Left	R2-1 (30)	30	36	7.50										1	

MODEL: Default
FILE NAME: S:\TR\Contracts\Contracts for Letting\Signing Contracts\64P68\CADD_shts.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES	F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
PLOT SCALE = 102.9963' / in.	DRAWN - _____	REVISED - _____			VAR	D2 SG 2021-1	VARIOUS	30	16	
PLOT DATE = Jan-25-2021 03:51:43 PM	CHECKED - _____	REVISED - _____			CONTRACT NO. 64P68					
	DATE - _____	REVISED - _____			ILLINOIS FED. AID PROJECT					
					SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____					

SCHEDULE OF QUANTITIES

Rock Island	IL 92	31.42	Between 26th St and 30th St	Right	R2-1 (30)	30	36	7.50							1			
Rock Island	IL 92	31.54	Between 26th St and 30th St	Right	R2-1 (40)	30	36	7.50								1		
Rock Island	IL 92	31.55	Between 26th St and 30th St	Median	R4-7	24	30	5.00			9	5						
Rock Island	IL 92	31.61	At 30th St	Median	R4-7	24	30	5.00			9	5						
Rock Island	IL 92	31.61	At 30th St	Median	R4-7	24	30	5.00			9	5						
Rock Island	IL 92	31.69	At 31st St	Median	R4-7	24	30	5.00			9	5						
Rock Island	IL 92	31.69	At 31st St	Median	R4-7	24	30	5.00			9	5						
Rock Island	IL 92	31.73	Between 30th and curve at Augustar	Left	R2-1 (40)	30	36	7.50							1			
Rock Island	IL 92	31.75	Between 30th and curve at Augustar	Right	R2-1 (40)	30	36	7.50							1			
Rock Island	IL 92	31.95	Between 30th and curve at Augustar	Right	W1-1R	36	36	9.00								1		
					W13-1(25)	24	24	4.00								1		
Rock Island	IL 92	32.07	Between 30th and curve at Augustar	Left	W4-3R	36	36	9.00	4.5	9	11	5						
Rock Island	IL 92	32.16	curve to 7th St	Right	R2-1 (30)	30	36	7.50								1		
Rock Island	IL 92	32.18	curve to 7th St	Left	R3-7L	30	30	6.25								1		
Rock Island	IL 92	32.22	curve to 7th St	Right	M3-2	24	12	2.00		4	12			1	1			
					M1-I100	24	24	4.00		8					1			IL 92
					M5-1L	21	15	2.19		4.38					1			
Rock Island	IL 92	32.26	At 38th and 7th	Median	R4-7	24	30	5.00			9	5						
Rock Island	IL 92	32.26	At 38th and 7th	Right	M3-2	24	12	2.00							1			
					M1-I100	24	24	4.00							1			IL 92
					M5-1L	21	15	2.19							1			
Rock Island	IL 92	32.28	7th -Between 38th and 46th/1st	Right	M3-2	24	12	2.00			11	5						
					M1-I100	24	24	4.00										IL 92
Rock Island	IL 92	32.28	7th -Between 38th and 46th/1st	Left	M3-2	24	12	2.00			10			1				
					M1-I100	24	24	4.00										IL 92
Rock Island	IL 92	32.30	7th -Between 38th and 46th/1st	Right	R2-1(30)	30	36	7.50							1			

MODEL: Default
FILE NAME: S:\TR\Contracts\Contract for Letting\Shpping Contracts\64P68\64P68 CADD.sht.dwg

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES	F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
PLOT SCALE = 102.9963' / in.	DRAWN - _____	REVISED - _____			VAR	D2 SG 2021-1	VARIOUS	30	17	
PLOT DATE = Jan-25-2021 03:51:50 PM	CHECKED - _____	REVISED - _____			SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____		ILLINOIS FED. AID PROJECT			
	DATE - _____	REVISED - _____			CONTRACT NO. 64P68					

SCHEDULE OF QUANTITIES

Rock Island	IL 92	32.30	7th -Between 38th and 46th/1st	Left	R2-1(30)	30	36	7.50			5	12	5					
Rock Island	IL 92	32.67	7th -Between 38th and 46th/1st	Left	R3-7L	30	36	7.50									1	
Rock Island	IL 92	32.68	7th -Between 38th and 46th/1st	Right	R3-7R	30	36	7.50									1	
Rock Island	IL 92	32.85	Moline Between 1st and 4th	Right	R2-1(30)	30	36	7.50									1	
Rock Island	IL 92	32.93	Moline - At 2nd St	Left	R6-1L	36	12	3.00										
					R6-1R	36	12	3.00										
Rock Island	IL 92	33.16	Moline - At 5th St	Left	R2-1(30)	30	36	7.50				11	5					
Rock Island	IL 92	33.17	Moline - At 5th St	Right	R2-1(30)	30	36	7.50									1	
Rock Island	IL 92	33.20	Moline - East of 5th St	Left	W1-3R	36	36	9.00										18
					W13-1(20)	24	24	4.00										
Rock Island	IL 92	33.24	Moline - At 6th St	Left	R6-1L	36	12	3.00			6.25							
					R6-1R	36	12	3.00										
Rock Island	IL 92	33.26	Moline - East of 6th	Left	M3-2	24	12	2.00										16
					M1-1100	24	24	4.00										
					M6-2R	21	15	2.19										IL 92
Rock Island	IL 92	33.31	Moline - At 7th St	Right	R6-1L	36	12	3.00				9	5					
Rock Island	IL 92	84.87	WB Moline - West of 7th St	Right	R2-1(30)	30	36	7.50										1
Rock Island	IL 92	84.87	WB Moline - West of 7th St	Left	R2-1(30)	30	36	7.50										1
Rock Island	IL 92	85.01	WB Moline - West of 5th St	Right	R2-1(30)	30	36	7.50				11	5					
Rock Island	IL 92	85.01	WB Moline - West of 5th St	Left	R2-1(30)	30	36	7.50										1
Rock Island	IL 92	85.25	WB Moline - West of 5th St	Right	R2-1(30)	30	36	7.50				11	5					
Rock Island	IL 92	85.32	WB Moline - West of 2nd	Left	W1-4R	36	36	9.00										16
Rock Island	IL 92	85.32	WB Moline - West of 2nd	Right	W1-4R	36	36	9.00		8.19								1
Rock Island	IL 92	85.43	WB, Rock Island - at 45th St	Left	R6-1R	36	12	3.00										1
					R6-1L	36	12	3.00										1
Rock Island	IL 92	85.49	WB, Rock Island - west of 45th St	Left	R2-1(30)	30	36	7.50		3		11	5					
Rock Island	IL 92	85.64	WB, Rock Island - at 42nd St	Right	R6-1L	36	12	3.00			6.25	12	5					
					R6-1R	36	12	3.00										
Rock Island	IL 92	85.65	WB, Rock Island - west of 42nd St	Left	R2-1(30)	30	36	7.50										1

MODEL: Default
FILE NAME: S:\IT\Contracts\Contracts for Letting\Shinn Contract\64P68 CADD.shts.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Jan-25-2021 03:51:56 PM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES	
SCALE: _____	SHEET ____ OF ____ SHEETS
STA. _____	TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2021-1	VARIOUS	30	18
ILLINOIS FED. AID PROJECT			CONTRACT NO. 64P68	

SCHEDULE OF QUANTITIES

Rock Island	IL 92	85.72	WB, Rock Island - at 42nd St	Right	R6-1L	36	12	3.00										1	
Rock Island	IL 92	85.79	WB, Rock Island - west of 40th St	Left	R2-1(30)	30	36	7.50										1	
Rock Island	IL 92	85.81	WB, Rock Island - west of 40th St	Left	R2-1(30)	30	36	7.50										1	
Rock Island	IL 92	85.83	WB, Rock Island - west of 39th St	Median	W1-6R	48	24	8.00										16	
					W13-1(25)	24	24	4.00											
Rock Island	IL 92	85.83	WB, Rock Island - west of 39th St	Median	M3-4	24	12	2.00										16	
					M1-I100	24	24	4.00											IL 92
					M6-2R	21	15	2.19											
Rock Island	IL 92	85.84	WB, Rock Island - west of 39th St	Left	W1-8	24	30	5.00					11	5					
Rock Island	IL 92	86.79	WB, Rock Island - west of 26th St	Left	M3-4	24	12	2.00										1	
					M1-I100	24	24	4.00										1	IL 92
					MSPC	21	15	2.19										1	RIGHT LANE
Rock Island	IL 92	86.84	WB, Rock Island - west of 25th St	Right	R2-1(30)	30	36	7.50										1	
Rock Island	IL 92	86.84	WB, Rock Island - west of 25th St	Left	R2-1(30)	30	36	7.50										1	
Winnebago	US 20	17.60	Between IL 2 and IL 251	Right	D10-5	18	60	7.50					12	5					East US 20 MM 17.6
Winnebago	US 20	17.60	Between IL 2 and IL 251	Left	D10-5	18	60	7.50					12	5					West US 20 MM 17.6
Winnebago	US 20	17.80	Between IL 2 and IL 251	Right	D10-5	18	60	7.50					12	5					East US 20 MM 17.8
Winnebago	US 20	17.80	Between IL 2 and IL 251	Left	D10-5	18	60	7.50					12	5					West US 20 MM 17.8
Winnebago	US 20	18.00	Between IL 2 and IL 251	Right	D10-4	18	54	6.75		2.25			12	5					East US 20 MM 18
Winnebago	US 20	18.00	Between IL 2 and IL 251	Left	D10-4	18	54	6.75		2.25			12	5					West US 20 MM 18
Winnebago	US 20	18.20	Between IL 2 and IL 251	Right	D10-5	18	60	7.50					12	5					East US 20 MM 18.2
Winnebago	US 20	18.20	Between IL 2 and IL 251	Left	D10-5	18	60	7.50					12	5					West US 20 MM 18.2
Winnebago	US 20	18.40	Between IL 2 and IL 251	Right	D10-5	18	60	7.50					12	5					East US 20 MM 18.4
Winnebago	US 20	18.40	Between IL 2 and IL 251	Left	D10-5	18	60	7.50					12	5					West US 20 MM 18.4
Winnebago	US 20	18.60	Between IL 2 and IL 251	Right	D10-5	18	60	7.50					12	5					East US 20 MM 18.6

MODEL: Default
 FILE NAME: S:\IT\Contracts\Contracts for Letting\Signin\Contract\64P68\64P68_CADD.shts.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Jan-25-2021 03:52:03 PM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES

SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2021-1	VARIOUS	30	19
CONTRACT NO. 64P68			ILLINOIS FED. AID PROJECT	

SCHEDULE OF QUANTITIES

Winnebago	US 20	18.60	Between IL 2 and IL 251	Left	D10-5	18	60	7.50				12	5					West US 20 MM 18.6
Winnebago	US 20	18.80	At IL 251	Right	D10-5	18	60	7.50				12	5					East US 20 MM 18.8
Winnebago	US 20	18.80	At IL 251	Left	D10-5	18	60	7.50				12	5					West US 20 MM 18.8
Winnebago	US 20	19.00	Between IL 251 and Alpine Rd	Right	D10-4	18	54	6.75	2.25			12	5					East US 20 MM 19
Winnebago	US 20	19.00	Between IL 251 and Alpine Rd	Left	D10-4	18	54	6.75	2.25			12	5					West US 20 MM 19
Winnebago	US 20	19.20	Between IL 251 and Alpine Rd	Right	D10-5	18	60	7.50				12	5					East US 20 MM 19.2
Winnebago	US 20	19.20	Between IL 251 and Alpine Rd	Left	D10-5	18	60	7.50				12	5					West US 20 MM 19.2
Winnebago	US 20	19.40	Between IL 251 and Alpine Rd	Right	D10-5	18	60	7.50				12	5					East US 20 MM 19.4
Winnebago	US 20	19.40	Between IL 251 and Alpine Rd	Left	D10-5	18	60	7.50				12	5					West US 20 MM 19.4
Winnebago	US 20	19.60	Between IL 251 and Alpine Rd	Right	D10-5	18	60	7.50				12	5					East US 20 MM 19.6
Winnebago	US 20	19.60	Between IL 251 and Alpine Rd	Left	D10-5	18	60	7.50				12	5					West US 20 MM 19.6
Winnebago	US 20	19.80	Between IL 251 and Alpine Rd	Right	D10-5	18	60	7.50				12	5					East US 20 MM 19.8
Winnebago	US 20	19.80	Between IL 251 and Alpine Rd	Left	D10-5	18	60	7.50				12	5					West US 20 MM 19.8
Winnebago	US 20	20.00	Between IL 251 and Alpine Rd	Right	D10-4	18	54	6.75	2.25			12	5					East US 20 MM 20
Winnebago	US 20	20.00	Between IL 251 and Alpine Rd	Left	D10-4	18	54	6.75	2.25			12	5					West US 20 MM 20
Winnebago	US 20	20.20	Between IL 251 and Alpine Rd	Right	D10-5	18	60	7.50				12	5					East US 20 MM 20.2
Winnebago	US 20	20.20	Between IL 251 and Alpine Rd	Left	D10-5	18	60	7.50				12	5					West US 20 MM 20.2
Winnebago	US 20	25.00	East of I-39	Right	M1-I200	18	18	2.25				10	5					20 / mm 25
Winnebago	US 20	25.00	East of I-39	Left	M1-I200	18	18	2.25				10	5					20 / mm 25
Winnebago	US 20	26.00	East of I-39	Right	M1-I200	18	18	2.25				10	5					20 / mm 26
Winnebago	BUS 20	0.36	At Weldon Rd	Right	R3-I100	24	24	4.00				9	5					
					M6-2L	21	15	2.19										
Winnebago	BUS 20	0.36	At Weldon Rd	Median	R4-7	36	48		12.00						14			
					OM3	12	36	3.00										

MODEL: Default
FILE NAME: S:\TR\Contracts\Contracts for Letting\Signing Contracts\64P68 CAD.DWG CADD.shts.dwg

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES	F.A. RTE. _____	SECTION _____	COUNTY _____	TOTAL SHEETS _____	SHEET NO. _____	
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____			VAR _____	D2 SG 2021-1	VARIOUS	30	20	
PLOT DATE = Jan-25-2021 03:52:16 PM	DATE - _____	REVISED - _____			SCALE: _____	SHEET _____ OF _____ SHEETS	STA. _____ TO STA. _____	CONTRACT NO. 64P68		
ILLINOIS FED. AID PROJECT										

SCHEDULE OF QUANTITIES

Winnebago	BUS 20	3.29	Between Springfield and IL 70	Left	R3-9B	24	36	6.00									16					
Winnebago	BUS 20	3.47	Between Springfield and IL 70	Left	R2-1 (40)	30	36	7.50				11	5									
Winnebago	BUS 20	3.47	Between Springfield and IL 70	Right	R2-1 (40)	30	36	7.50														1
Winnebago	BUS 20	3.58	Between Springfield and IL 70	Right	W9-1R	36	36	9.00														1
Winnebago	BUS 20	4.22	Between Springfield and IL 70	Left	S1-1	36	36	9.00														1
					W16-9P	24	12	2.00														1
Winnebago	BUS 20	4.34	Between Springfield and IL 70	Median	R4-7	24	30	5.00				10	5									
Winnebago	BUS 20	4.69	Between Springfield and IL 70	Median	R4-7	24	30	5.00				10	5									
Winnebago	BUS 20	4.69	Between Springfield and IL 70	Left	R6-1L	24	30	5.00														1
Winnebago	BUS 20	4.84	Between Springfield and IL 70	Median	OM3	12	36	3.00				11	5									
Winnebago	BUS 20	4.84	Between Springfield and IL 70	Median	OM3	12	36	3.00				11	5									
Winnebago	BUS 20	4.93	Between Springfield and IL 70	Right	M2-1	21	15	2.19														1
					M1-I100	24	24	4.00														1
																						IL 70
Winnebago	BUS 20	4.93	Between Springfield and IL 70	Median	M2-1	21	15	2.19														
					M1-I100	24	24	4.00														
																						IL 70
Winnebago	BUS 20	5.10	Between IL 70 and the Rock River	Right	M3-2	24	12	2.00				12	5									
					M4-3	24	12	2.00														
					M1-4	24	24	4.00														
																						US 20
Winnebago	BUS 20	5.10	Between IL 70 and the Rock River	Left	M3-2	24	12	2.00				12	5									
					M4-3	24	12	2.00														
					M1-4	24	24	4.00														
																						US 20
Winnebago	BUS 20	5.12	Between IL 70 and the Rock River	Right	R2-1 (30)	30	36	7.50				11	5									
Winnebago	BUS 20	5.12	Between IL 70 and the Rock River	Left	R2-1 (30)	30	36	7.50				11	5									
Winnebago	BUS 20	5.29	Between IL 70 and the Rock River	Right	R2-1 (30)	30	36	7.50			10.19	3	12	5								
Winnebago	BUS 20	5.29	Between IL 70 and the Rock River	Left	R2-1 (30)	30	36	7.50				11	5									
Winnebago	BUS 20	5.44	300 feet west of IL 2 SB	Right	M3-1	24	12	2.00														16
					M3-3	24	12	2.00														
					M1-I100	24	24	4.00														
					M1-I100	24	24	4.00														
					MSPC	21	15	2.19														
					M5-1R	21	15	2.19														
																						IL 2
																						IL 2
																						LEFT LANE
Winnebago	BUS 20	5.46	200 feet west of IL 2 SB	Right	D1-2	42	18	5.25														1
																						^ Beliot, WI Dixon ->

MODEL: Default
 FILE NAME: S:\ITC\Contracts\Contracts for Letting\Springing Contracts\64P68\CADD_shts.dgn

USER NAME = ebenezrtg PLOT SCALE = 102.9963' / in. PLOT DATE = Jan-25-2021 03:52:31 PM	DESIGNED - _____ DRAWN - _____ CHECKED - _____ DATE - _____	REVISED - _____ REVISED - _____ REVISED - _____ REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES	F.A. - _____ RTE. - _____ VAR. - _____ SECTION D2 SG 2021-1 COUNTY VARIOUS TOTAL SHEETS 30 SHEET NO. 22 CONTRACT NO. 64P68 ILLINOIS FED. AID PROJECT
SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____					

SCHEDULE OF QUANTITIES

Winnebago	BUS 20	5.48	100 feet west of IL 2 SB	Right	M3-1	24	12	2.00									16		
					M3-3	24	12	2.00											
					M1-I100	24	24	4.00											IL 2
					M1-I100	24	24	4.00											IL 2
					MSPC	21	15	2.19											LEFT LANE
					M6-1R	21	15	2.19											
Winnebago	BUS 20	5.49	100 feet west of IL 2 SB	Left	M3-1	24	12	2.00	8.19								16		
					M3-3	24	12	2.00											
					M1-I100	24	24	4.00											IL 2
					M1-I100	24	24	4.00											IL 2
					MSPC	21	15	2.19											LEFT LANE
					M6-1R	21	15	2.19											
Winnebago	BUS 20	5.52	100 feet east of IL 2 SB	Right	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	5.46	100 feet west of IL 2 NB	Right	D1-1	42	12	3.50										1	<- Beliot, WI
					M3-1	24	12	2.00	1.31									1	
					M1-I100	24	24	4.00	4									1	IL 2
					M6-1L	21	15	2.19	2.19									1	
Winnebago	BUS 20	5.70	400 feet east of IL 2 NB	Left	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	5.71	500 feet east of IL 2 NB	Right	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	6.01	80 feet east of IL 251 (2nd St)	Right	R3-7R	30	30	6.25			11	5							
Winnebago	BUS 20	5.96	east of Rock River	Left	R1-1	30	30	6.25		10	12	5							
Winnebago	BUS 20	6.04	Near IL 251	Right	M2-1	21	15	2.19			12	5							
					M1-I100	30	24	5.00											IL 251
Winnebago	BUS 20	6.04	Near IL 251	Left	M2-1	21	15	2.19										1	
					M1-I100	30	24	5.00										1	IL 251
Winnebago	BUS 20	6.05	250 feet west of IL 251 SB	Right	D1-2	42	18	5.25			12	5							<- Beloit, WI Rochelle ->
Winnebago	BUS 20	6.05	250 feet west of IL 251 SB	Left	D1-2	42	18	5.25										1	<- Beloit, WI Rochelle ->
Winnebago	BUS 20	6.10	At IL 251 (Kishwaukee St)	Left	M1-I100	30	24	5.00	7.5									1	IL 251
					M6-4	21	15	2.19										1	
Winnebago	BUS 20	6.13	east of IL 251	Right	M3-2	24	12	2.00			12	5							
					M4-3	24	12	2.00											
					M1-4	24	24	4.00											US 20
Winnebago	BUS 20	6.13	east of IL 251	Left	M3-2	24	12	2.00										1	
					M4-3	24	12	2.00										1	
					M1-4	24	24	4.00										1	US 20
Winnebago	BUS 20	6.24	Between IL 251 and State St	Left	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	6.24	Between IL 251 and State St	Right	R2-1 (30)	30	36	7.50	6.5									1	

MODEL: Default
 FILE NAME: S:\ITR\Contracts\Contracts for Letting\Signing_Contracts\64P68\64P68_CADD_shts.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 102.9963' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Jan-25-2021 03:52:38 PM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES			
SCALE: _____	SHEET _____ OF _____ SHEETS	STA. _____ TO STA. _____	

F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2021-1	VARIOUS	30	23
CONTRACT NO. 64P68			ILLINOIS FED. AID PROJECT	

SCHEDULE OF QUANTITIES

Winnebago	BUS 20	6.38	Between IL 251 and State St	Left	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	6.38	Between IL 251 and State St	Right	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	6.48	Between IL 251 and State St	Right	R3-7R	30	30	6.25				11	5						
Winnebago	BUS 20	6.48	250 feet south of State St	Right	M3-2	24	12	2.00							18				
					M4-3	24	12	2.00											
					M1-4	24	24	4.00											US 20
					M5-1R	21	15	2.19											
Winnebago	BUS 20	6.56	State St - from split to Alpine	Right	M3-2	24	12	2.00				12	5						
					M4-3	24	12	2.00											
					M1-4	24	24	4.00											US 20
Winnebago	BUS 20	6.57	State St - from split to Alpine	Left	M3-4	24	12	2.00										1	
					M4-3	24	12	2.00										1	
					M1-4	24	24	4.00										1	US 20
					MSPC	21	15	2.19										1	RIGHT LANE
Winnebago	BUS 20	6.58	State St - from split to Alpine	Right	R3-9B	24	36	6.00				11	5						
Winnebago	BUS 20	6.60	State St - from split to Alpine	Left	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	6.61	State St - from split to Alpine	Right	R2-1 (30)	30	36	7.50				11	5						
Winnebago	BUS 20	6.62	State St - from split to Alpine	Left	R3-9B	24	36	6.00										1	
Winnebago	BUS 20	6.81	State St - from split to Alpine	Left	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	7.11	State St - from split to Alpine	Left	M3-4	24	12	2.00										1	
					M4-3	24	12	2.00										1	
					M1-4	24	24	4.00										1	US 20
Winnebago	BUS 20	7.14	State St - from split to Alpine	Right	M3-2	24	12	2.00				12	5						
					M4-3	24	12	2.00											
					M1-4	24	24	4.00											US 20
Winnebago	BUS 20	7.32	State St - from split to Alpine	Left	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	7.40	State St - from split to Alpine	Right	R2-1 (30)	30	36	7.50				11	5						
Winnebago	BUS 20	7.60	State St - from split to Alpine	Left	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	8.10	State St - from split to Alpine	Right	D13-I100	30	36	7.50										1	
					D13-I101	30	9	1.88										1	

MODEL: Default
 FILE NAME: S:\TR\Contracts\Contracts for Letting\Shimma_Contracts\64P68\64P68_CADD_9185.dgn

USER NAME = ebenezertg PLOT SCALE = 102.9963' / in. PLOT DATE = Jan-25-2021 03:52:47 PM	DESIGNED - _____ DRAWN - _____ CHECKED - _____ DATE - _____	REVISED - _____ REVISED - _____ REVISED - _____ REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____	F.A. RTE. _____ VAR _____ SECTION D2 SG 2021-1 COUNTY VARIOUS TOTAL SHEETS 30 SHEET NO. 24 ILLINOIS FED. AID PROJECT
---	--	--	---	--	--

SCHEDULE OF QUANTITIES

Winnebago	BUS 20	8.19	State St - from split to Alpine	Left	R2-1 (35)	30	36	7.50										1	
Winnebago	BUS 20	8.22	State St - from split to Alpine	Right	R3-2	30	30	6.25			10	5							
Winnebago	BUS 20	8.38	State St - from split to Alpine	Left	R2-1 (35)	30	36	7.50			11	5							
Winnebago	BUS 20	8.40	State St - from split to Alpine	Left	M3-4	24	12	2.00			12	5							
					M4-3	24	12	2.00											
					M1-4	24	24	4.00											US 20
Winnebago	BUS 20	8.44	State St - from split to Alpine	Right	R2-1 (35)	30	36	7.50			10	0					1		
Winnebago	BUS 20	8.51	State St - from split to Alpine	Right	R3-9B	24	36	6.00									1		
Winnebago	BUS 20	8.62	State St - from split to Alpine	Left	R3-9B	24	36	6.00											
Winnebago	BUS 20	8.68	State St - from split to Alpine	Left	R2-1 (35)	30	36	7.50										1	
Winnebago	BUS 20	8.70	State St - from split to Alpine	Right	R2-1 (35)	30	36	7.50										1	
Winnebago	BUS 20	8.95	State St - from split to Alpine	Right	R2-1 (35)	30	36	7.50			11	5							
Winnebago	BUS 20	9.06	State St - from split to Alpine	Left	R3-9B	24	36	6.00			11	5							
Winnebago	BUS 20	9.23	Between Alpine and Perryville	Right	R3-9B	24	36	6.00			11	5							
Winnebago	BUS 20	9.39	Between Alpine and Perryville	Right	R2-1 (35)	30	36	7.50			11	5							
Winnebago	BUS 20	9.61	Between Alpine and Perryville	Left	R4-7	24	30	5.00		5								1	
Winnebago	BUS 20	9.84	Between Alpine and Perryville	Left	R3-9B	24	36	6.00			11	5							
Winnebago	BUS 20	10.02	Between Alpine and Perryville	Left	R1-1	30	30	6.25		6.25	12	5							
					R3-5	30	36	7.50											
Winnebago	BUS 20	10.02	Between Alpine and Perryville	Left	R3-2	24	24	4.00			8	5							
Winnebago	BUS 20	10.05	Between Alpine and Perryville	Right	R2-1 (45)	30	36	7.50			9	5							
Winnebago	BUS 20	10.23	Between Alpine and Perryville	Median	OM3	12	36	3.00			9	5							
					OM3	12	36	3.00											

MODEL: Default
FILE NAME: S:\TRAContracts\Contracts for Letting\Signing Contracts\64P68\64P68.dwg

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 1/2" = 102.9963' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Jan-25-2021 03:52:54 PM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES

SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

F.A. RTE VAR	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	D2 SG 2021-1	VARIOUS	30	25
ILLINOIS FED. AID PROJECT			CONTRACT NO. 64P68	

SCHEDULE OF QUANTITIES

Winnebago	BUS 20	10.30	Between Alpine and Perryville	Median	R6-1R	36	12	3.00				8	5					
Winnebago	BUS 20	10.35	Between Alpine and Perryville	Median	R6-1R	36	12	3.00				8	5					
Winnebago	BUS 20	10.40	Between Alpine and Perryville	Median	OM3	12	36	3.00				9	5					
					OM3	12	36	3.00										
Winnebago	BUS 20	10.40	Between Alpine and Perryville	Median	OM3	12	36	3.00				9	5					
					OM3	12	36	3.00										
Winnebago	BUS 20	10.47	Between Alpine and Perryville	Median	R6-1R	36	12	3.00				8	5					
Winnebago	BUS 20	10.48	Between Alpine and Perryville	Left	R2-1 (45)	30	36	7.50				10	5					
Winnebago	BUS 20	10.52	Between Alpine and Perryville	Median	R6-1R	36	12	3.00				8	5					
Winnebago	BUS 20	10.53	Between Alpine and Perryville	Median	R6-1R	36	12	3.00				8	5					
Winnebago	BUS 20	10.53	Between Alpine and Perryville	Right	R3-2	24	24	4.00				8	5					
Winnebago	BUS 20	10.53	Between Alpine and Perryville	Left	R3-2	24	24	4.00				8	5					
Winnebago	BUS 20	10.63	Between Alpine and Perryville	Median	R6-1R	36	12	3.00				8	5					
					R6-1R	36	12	3.00										
Winnebago	BUS 20	10.67	Between Alpine and Perryville	Left	R4-7	24	30	5.00				9	5					
					OM3	12	36	3.00										
Winnebago	BUS 20	10.67	Between Alpine and Perryville	Right	R4-7	24	30	5.00				9	5					
					OM3	12	36	3.00										
Winnebago	BUS 20	10.67	Between Alpine and Perryville	Median	R4-7	24	30	5.00				9	5					
					OM3	12	36	3.00										
Winnebago	BUS 20	10.67	Between Alpine and Perryville	Median	R4-7	24	30	5.00				9	5					
					OM3	12	36	3.00										
Winnebago	BUS 20	10.79	Between Alpine and Perryville	Right	R6-2R	24	30	5.00		6.25		11	5					
Winnebago	BUS 20	10.79	Between Alpine and Perryville	Right	R3-2	24	24	4.00				8	5					
Winnebago	BUS 20	10.79	Between Alpine and Perryville	Median	R6-1R	36	12	3.00				8	5					
Winnebago	BUS 20	10.79	Between Alpine and Perryville	Right	R1-1	30	30	6.25		4		11	5					
					R6-2R	24	30	5.00										
Winnebago	BUS 20	11.02	Between Alpine and Perryville	Left	R1-1	30	30	6.25		6.25								
Winnebago	BUS 20	11.02	Between Alpine and Perryville	Median	R6-1R	36	12	3.00				8	5					
					R6-1R	36	12	3.00										

MODEL: Default
FILE NAME: S:\TR\Contracts\Contracts for Letting\Shimco_Contracts\Map\64P68_CADD.sht.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PLOT SCALE = 102.9963 1 / in.	CHECKED - _____	REVISED - _____		SCALE: _____	SHEET _____	OF _____	SHEETS	STA. _____	TO STA. _____	VARIOUS	30	26
PLOT DATE = Jan-25-2021 03:53:01 PM	DATE - _____	REVISED - _____		CONTRACT NO. 64P68								
ILLINOIS FED. AID PROJECT												

SCHEDULE OF QUANTITIES

Winnebago	BUS 20	11.98	250' east of Buckely	Right	R15-1105	42	30	8.75					12					
Winnebago	BUS 20	12.04	580' east of Buckely	Left	R2-1 (45)	30	36	7.50			11	5						
Winnebago	BUS 20	12.15	175' west of Bell School Rd	Left	M3-4	24	12	2.00			11	5						
					M4-3	24	12	2.00										US 20
					M1-4	24	24	4.00										
Winnebago	BUS 20	12.21	100' east of Bell School Rd	Right	M3-2	24	12	2.00			11	5						
					M4-3	24	12	2.00										US 20
					M1-4	24	24	4.00										
Winnebago	BUS 20	12.83	700' east of Lyford Rd	Left	W3-3	36	36	9.00					16					
					W17-1100	36	9	2.25										Lyford Rd
Winnebago	BUS 20	13.00	100' east of Bell School Rd	Right	M1-1200	18	18	2.25			10	5						
Winnebago	BUS 20	13.00	100' east of Bell School Rd	Left	M1-1200	18	18	2.25			10	5						
Winnebago	BUS 20	13.67	1/4 mile east of University Dr	Right	W11-10	36	36	9.00					18					
Winnebago	BUS 20	13.67	300' west of Bonne Co. Line	Left	R15-1105	42	30	8.75					12					
Winnebago	BUS 20	13.71	300' west of Bonne Co. Line	Right	R15-1105	42	30	8.75					12					
Winnebago	BUS 20	50.04	State St - 75' east of Jefferson St	Left	M4-5	24	12	2.00										1
					M6-3	21	15	2.19										1
Winnebago	BUS 20	50.06	E state St / Charles St	Right	M3-4	24	12	2.00										1
					M4-3	24	12	2.00										1
					M1-4	24	24	4.00										1
					M6-3	21	15	2.19										1
																		US 20
Winnebago	BUS 20	50.12	WB @ Hall St.	Right	M3-4	24	12	2.00										1
					M4-3	24	12	2.00										1
					M1-4	24	24	4.00										1
																		US 20
Winnebago	BUS 20	50.16	WB, 100' west of 6th st.	Right	M3-4	24	12	2.00										1
					M4-3	24	12	2.00										1
					M1-4	24	24	4.00										1
																		US 20
Winnebago	BUS 20	50.18	WB, 170' west of 6th St.	Left	R2-1 (30)	30	36	7.50			11	5						
Winnebago	BUS 20	50.20	WB, 200' east of 4th St.	Left	M2-1	21	15	2.19										1
					M1-1100	30	24	5.00										1
																		IL 251
Winnebago	BUS 20	50.20	WB, 200' east of 4th St.	Right	M2-1	21	15	2.19			11	5						
					M1-1100	30	24	5.00										
																		IL 251
Winnebago	BUS 20	50.26	WB, 50' west of 4th	Right	D1-2	42	18	5.25			11							1
																		Beloit, Wi -> ^ Rochelle
Winnebago	BUS 20	50.26	WB, 50' west of 4th	Left	D1-2	42	18	5.25										
																		Beloit, Wi -> ^ Rochelle
Winnebago	BUS 20	50.28	WB, 170' east of 3rd. St.	Left	M3-3	24	12	2.00			12	5						
					M1-1100	30	24	5.00										2
					M6-3	21	15	2.19										5
																		2.19
																		IL 251

 MODEL: Default
 FILE NAME: S:\TR\Contracts\Contracts for Letting\Signing Contracts\64P68\64P68 CADD.shts.dgn

USER NAME = ebenezertg PLOT SCALE = 102.9963' / in. PLOT DATE = Jan-25-2021 09:53:08 PM	DESIGNED - _____ DRAWN - _____ CHECKED - _____ DATE - _____	REVISED - _____ REVISED - _____ REVISED - _____ REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____	F.A. RTE. _____ VAR _____	SECTION _____ D2 SG 2021-1	COUNTY _____ VARIOUS	TOTAL SHEETS _____ 30	SHEET NO. _____ 27	CONTRACT NO. 64P68 ILLINOIS FED. AID PROJECT
---	--	--	---	--	------------------------------	-------------------------------	-------------------------	--------------------------	-----------------------	---

SCHEDULE OF QUANTITIES

Winnebago	BUS 20	50.29	WB, @ 3rd St (IL 251 NB)	Right	M3-1	24	12	2.00				12	5							IL 251
					M1-I100	30	24	5.00												
					M6-1R	21	15	2.19												
Winnebago	BUS 20	50.31	WB, @ 3rd St (IL 251 NB)	Left	M3-1	24	12	2.00			6									IL 251
					M1-I100	30	24	5.00												
					M6-1R	21	15	2.19												
Winnebago	BUS 20	50.31	WB, @ 3rd St (IL 251 NB)	Right	M3-4	24	12	2.00			9									
					M4-3	24	12	2.00												
					M1-4	24	24	4.00												US 20
					M6-1L	21	15	2.19												
Winnebago	BUS 20	50.31	WB, @ 3rd St (IL 251 NB)	Right	R6-1L	36	12	3.00												
Winnebago	BUS 20	50.31	WB, @ 3rd St (IL 251 NB)	Left	M3-1	24	12	2.00												
					M1-I100	30	24	5.00												
					M6-3	21	15	2.19												IL 251
Winnebago	BUS 20	50.33	WB, between 3rd and 4th	Right	M3-1	24	12	2.00				12	5							
					M1-I100	30	24	5.00												
					M5-1L	21	15	2.19												
Winnebago	BUS 20	50.36	WB, between 3rd and 4th	Left	D1-1	42	12	3.50				9	5							<- Rochelle
Winnebago	BUS 20	50.36	WB, between 3rd and 4th	Right	D1-1	42	12	3.50				9	5							<- Rochelle
Winnebago	BUS 20	50.39	WB, @ 4th St (IL 251 SB)	Left	R6-2R	24	30	5.00			3									
Winnebago	BUS 20	50.39	WB, @ 4th St (IL 251 SB)	Right	R6-2R	24	30	5.00												
Winnebago	BUS 20	50.40	WB, between 3rd and 2nd	Left	M3-4	24	12	2.00												
					M4-3	24	24	4.00												
					M1-4	21	15	2.19												US 20
Winnebago	BUS 20	50.40	WB, between 3rd and 2nd	Right	M3-4	24	12	2.00				12	5							
					M4-3	24	24	4.00												
					M1-4	21	15	2.19												US 20
Winnebago	BUS 20	50.44	WB, between 3rd and 2nd	Right	R2-1 (30)	30	36	7.50			3.75	12	5							
Winnebago	BUS 20	50.52	WB, 300' west of 1st St	Left	R2-1 (30)	30	36	7.50												
Winnebago	BUS 20	50.55	WB, 400' west of 1st St	Right	R2-1 (30)	30	36	7.50												
Winnebago	BUS 20	50.60	WB, 700' west of 1st St	Right	M2-1	21	15	2.19												
					M1-I100	24	24	4.00												
Winnebago	BUS 20	50.63	WB, 850' west of 1st St	Left	M2-1	21	15	2.19												
					M1-I100	24	24	4.00												
Winnebago	BUS 20	50.75	WB, 250' east of Wyman	Left	D1-2	42	24	7.00												^ DIXON
					R2-1 (30)	30	36	7.50												BELOIT ->
Winnebago	BUS 20	50.76	WB, 150' east of Wyman	Right	D1-2	42	24	7.00												^ DIXON
																				BELOIT ->

MODEL: Default
FILE NAME: S:\ITV\Contracts\Contractors\Letting\Shipping Contracts\64P68\64P68 CADD sheets.dgn

USER NAME = ebenezertg	DESIGNED - _____	REVISED - _____
DRAWN - _____	REVISED - _____	
PLOT SCALE = 102.9963 ' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Jan-25-2021 03:53:15 PM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES

SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

F.A. RTE. / VAR	SECTION D2 SG 2021-1	COUNTY VARIOUS	TOTAL SHEETS 30	SHEET NO. 28
				CONTRACT NO. 64P68
ILLINOIS FED. AID PROJECT				

SCHEDULE OF QUANTITIES

Winnebago	BUS 20	50.94	WB, 150' east of Church (IL 2 SB)	Right	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	50.94	WB, 150' east of Church (IL 2 SB)	Left	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	51.12	WB, 75' east of Rockton Ave	Right	M2-1	21	15	2.19										1	
					M1-4	24	24	4.00										1	IL 70
					MSPC	21	15	2.19										1	RIGHT LANE
Winnebago	BUS 20	51.15	WB, 100' west of Rockton Ave	Right	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	50.18	WB, 250' west of Rockton Ave	Left	R2-1 (30)	30	36	7.50										1	
Winnebago	BUS 20	51.22	WB, at horseman St	Left	D1-1	30	18	3.75										1	DURAND ->
Winnebago	BUS 20	51.24	WB, at horseman St	Right	D1-1	30	18	3.75		6.25								1	DURAND ->
Winnebago	BUS 20	51.32	WB, 200' west of Kilburn (IL 70)	Right	R2-1 (30)	30	36	7.50				11	5						
Winnebago	BUS 20	51.32	WB, 200' west of Kilburn (IL 70)	Left	R2-1 (30)	30	36	7.50				11	5						

MODEL: Default
 FILE NAME: S:\IT\Contracts\Contracts for Letting\Shpping Contracts\64P68\64P68_CADD_shts.dwg

USER NAME = ebenezertg PLOT SCALE = 102.9963' / in. PLOT DATE = Jan-25-2021 03:53:27 PM	DESIGNED - _____ DRAWN - _____ CHECKED - _____ DATE - _____	REVISED - _____ REVISED - _____ REVISED - _____ REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES	F.A. _____ RTE. _____ VAR. _____	SECTION D2 SG 2021-1	COUNTY VARIOUS	TOTAL SHEETS 30	SHEET NO. 30
SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____				ILLINOIS FED. AID PROJECT CONTRACT NO. 64P68					