

PROJECT ENGINEER: TROY EBENEZER 815-590-1313

04-23-2021 LETTING ITEM 200

FOR INDEX OF SHEETS & STATE STANDARDS
SEE SHEET NO. 2



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

PROPOSED HIGHWAY PLANS

VARIOUS ROUTES
SECTION D2 TR 2021-1
VARIOUS COUNTIES
C-92-040-21

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 TR 2021-1	VARIOUS	4	1

CONTRACT NO. 64P96
D-92-037-21

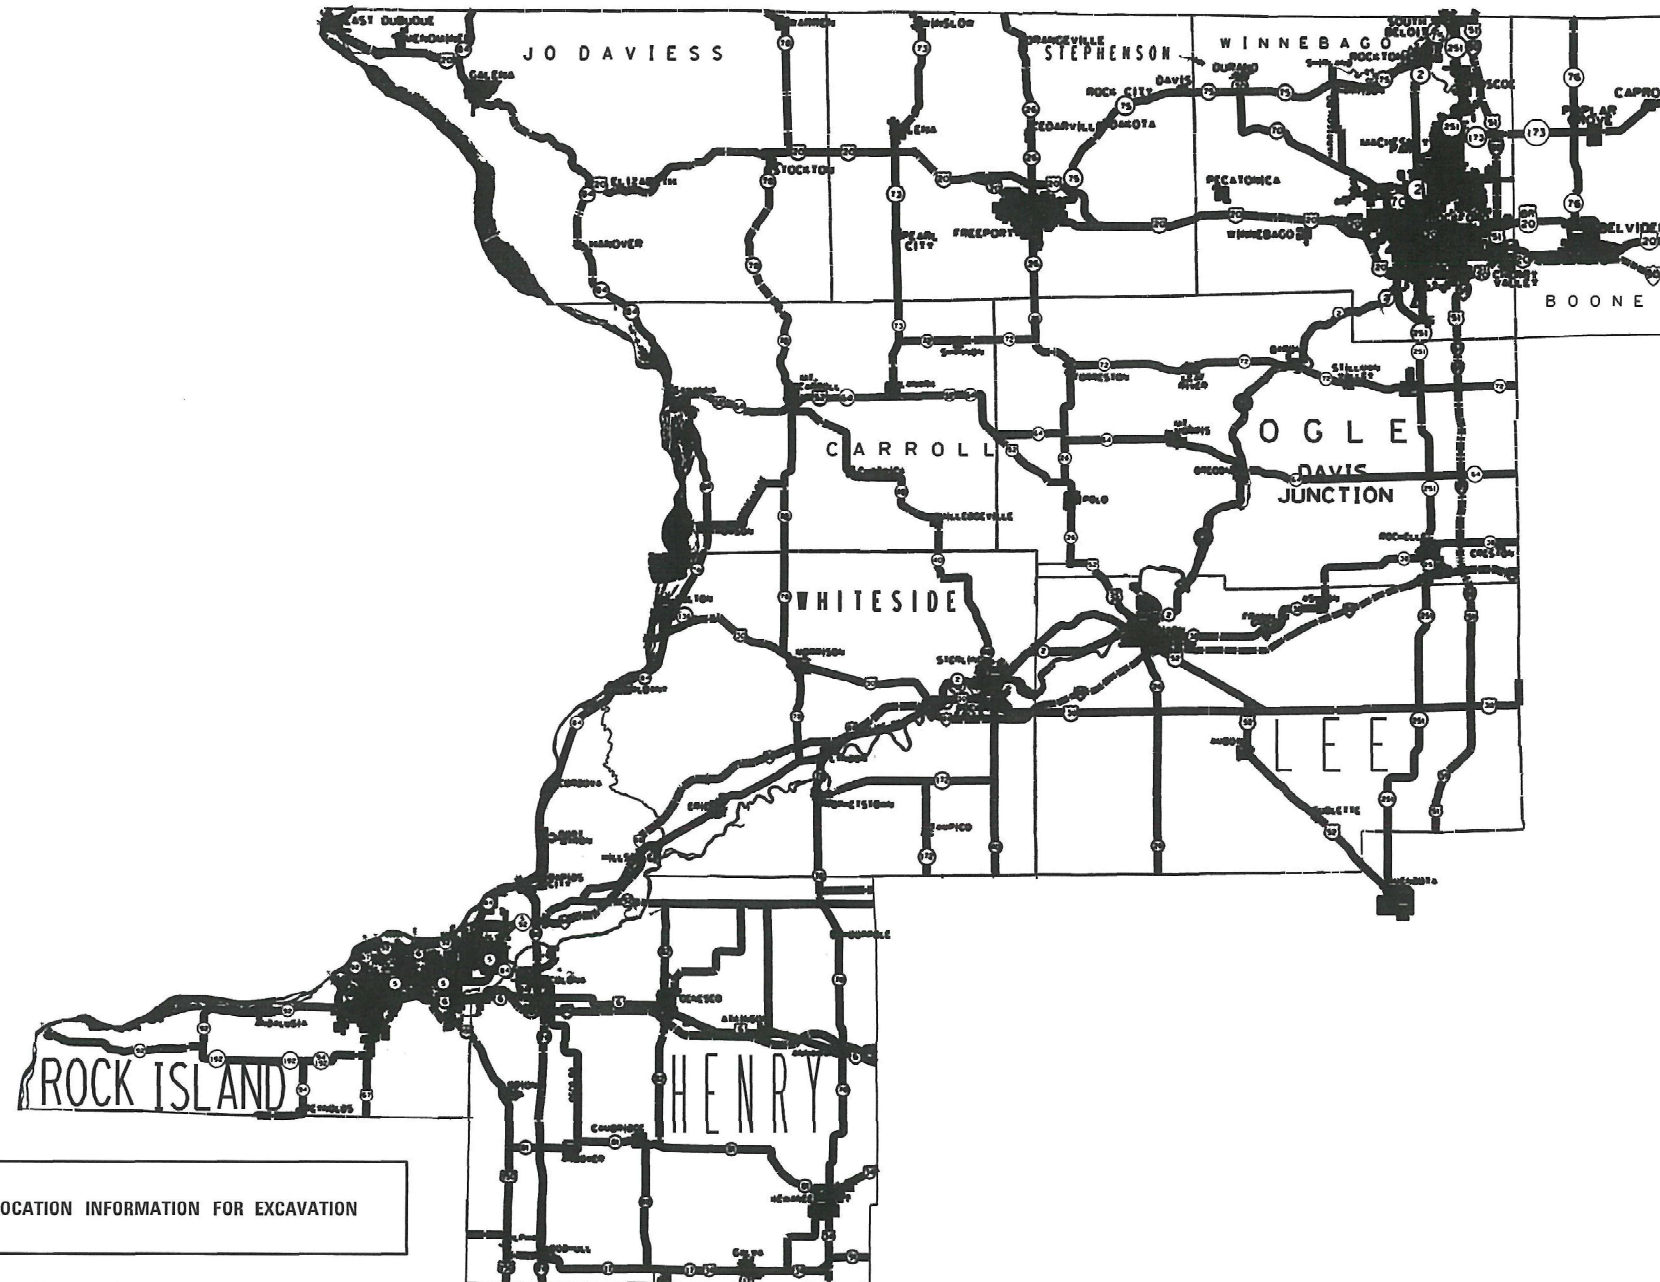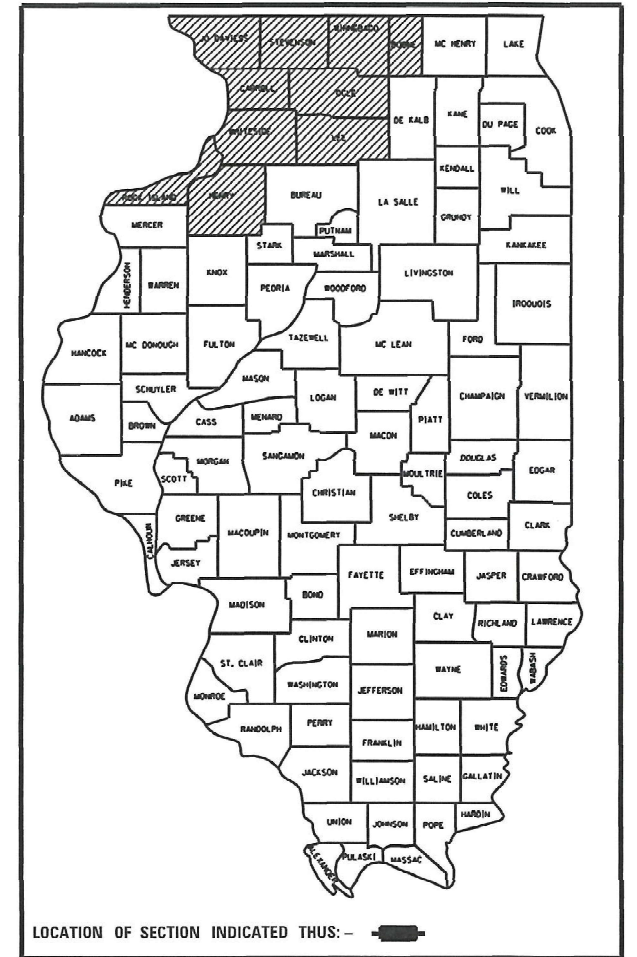

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

CONTRACT NO. 64P96

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED January 14th 20 21

[Signature]
REGIONAL ENGINEER

March 19, 2021
[Signature]
ENGINEER OF DESIGN AND ENVIRONMENT

March 19, 2021
[Signature]
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION ¹³

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

SUPERVISOR: KRISTIE NYDEREK 815-284-5469

INDEX OF SHEETS

INDEX	
1	Cover Sheet
2	Index of Sheets / State Standards
3	Summary of Quantities
4	General Notes
STATE STANDARDS	
001006	DECIMAL OF AN INCH AND OF A FOOT
701001-02	OFF-ROAD OPERATIONS, 2L, 2W, MORE THAN 15' (4.5M) AWAY
701006-05	OFF-ROAD OPERATIONS, 2L, 2W, 15' (4.5M) TO 24" (600M) FROM PAVEMENT EDGE
701101-05	OFF-ROAD OPERATIONS, MULTILANE, 15' (4.5M) TO 24" (600MM) FROM PAVEMENT EDGE
701106-02	OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' (4.5M) AWAY
701201-05	LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS > 45 MPH
701301-04	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701400-10	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701401-12	LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-12	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701421-08	LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY, FOR SPEEDS > 45 MPH TO 55 MPH
701428-01	TRAFFIC CONTROL, SETUP AND REMOVAL, FREEWAY/EXPRESSWAY
701501-06	URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
701502-09	URBAN LANE CLOSURE, 2L, 2W, WITH BIDIRECTIONAL LEFT TURN LANE
701601-09	URBAN LANE CLOSURE, MULTILANE, 1W OR 2W WITH NONTRAVERSABLE MEDIAN
701602-10	URBAN LANE CLOSURE, MULTILANE, 2W WITH BIDIRECTIONAL LEFT TURN LANE
701606-10	URBAN SINGLE LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
701611-01	URBAN HALF ROAD CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
701801-06	SIDEWALK, CORNER OR CROSSWALK CLOSURE
701901-08	TRAFFIC CONTROL DEVICES
720011-01	METAL POST FOR SIGNS, MARKERS AND DELINEATORS
728001-01	TELESCOPING STEEL SIGN SUPPORT
729001-01	APPLICATIONS OF TYPES A AND B METAL POST (FOR SIGNS & MARKERS)
731001-01	BASE FOR TELESCOPING STEEL SIGN SUPPORT

MODEL: Default
FILE NAME: D:\dtpg - 2021 Tree Removal Contract\Contract Submittal\gppg - tree removal covr.dwg

USER NAME = ebenezertg	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS & STATE STANDARDS	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PLOT SCALE = 102.9963 ' / in.	CHECKED -	REVISED -			VAR.	D2 TR 2021-1	VARIOUS	4	2
PLOT DATE = Feb-18-2021 09:37:20 AM	DATE -	REVISED -			CONTRACT NO. 64P96		ILLINOIS FED. AID PROJECT		
				SCALE:	SHEET	OF	SHEETS	STA.	TO STA.

SUMMARY OF QUANTITIES

<u>SUMMARY OF QUANTITIES</u>				
			0031	
CODE NO.	ITEM	UNIT	100% STATE	TOTAL QUANTITY
20100110	TREE REMOVAL (6-15 UNITS DIAMETER)	UNIT	1100	1100
20100210	TREE REMOVAL (OVER 15 UNITS DIAMETER)	UNIT	5500	5,500

MODEL: Default
FILE NAME: D:\64P96 - 2021 Tree Removal Contract Submittal\64P96 - tree removal covr.dwg

USER NAME = ebenezertg	DESIGNED -	REVISED -
PLOT SCALE = 102.9963' / in.	DRAWN -	REVISED -
PLOT DATE = Feb-18-2021 09:37:29 AM	CHECKED -	REVISED -
	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SUMMARY OF QUANTITIES				
SCALE:	SHEET	OF	SHEETS	STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D2 TR 2021-1	VARIOUS	4	3
CONTRACT NO. 64P96				
ILLINOIS FED. AID PROJECT				

GENERAL NOTES

GENERAL NOTES

The purpose of this contract is to remove trees at various locations throughout the counties of District 2, including Boone, Carroll, Henry, JoDaviess, Lee, Ogle, Rock Island, Stephenson, Whiteside, Winnebago and in portions of Bureau and LaSalle Counties. The tree removal will vary in size, the smallest being 6 units. All the labor, equipment, and materials required to remove the trees will be paid for at the contract unit price per UNIT for TREE REMOVAL of the size specified.

Questions regarding tree removal shall be directed to the District 2 Roadside Management Specialist. They may be contacted at (815)284-5403.

The Contractor shall be responsible for locating and protecting utility property during construction operations as outlined in Article 107.39 of the Standard Specifications. A minimum of 48 hours advance notice is required for non-emergency work. The JULIE number is 800-892-0123.

IDOT is not a member of JULIE. If you are near any overhead lighting, intersection lighting or traffic signals, contact the IDOT Traffic Office at 815/284-5469 at least 48 hours prior to work.

All trees to be removed shall have a work order issued. Prior to the contractor removing any tree, the contractor shall contact the District 2 Roadside Management Specialist who shall locate and mark the trees to be removed.

If trees are downed as a result of storms and pose a danger to the traveling public, IDOT crews will clear the trees from the roadway. Complete removal may then be completed by the contractor upon receiving a work order to complete such work.

If tree removal is deemed an emergency the contractor may contact the Department and request temporary traffic control until such time the contractor can install permanent traffic control.

All Traffic Control required for the tree removal shall be considered included in the contract unit price per UNIT for TREE REMOVAL of the size specified.

MODEL: Default
FILE NAME: D:\4796 - 2021 Tree Removal Contract\Contract Submittal\64796 - tree removal.cour.dwg

USER NAME * reviewing	DESIGNED *	REVISED *	
TWO POINT * 10:00 AM / 10/1/21	DRAWN *	REVISION *	
POST DATE * 10/1/2021 9:37:27 AM	CHECKED *	REVISION *	
	DATE *	REVISION *	
STATE OF ILLINOIS			
DEPARTMENT OF TRANSPORTATION			
SCALE	SHEET	OF	SHEETS STA TO STA
SUMMARY OF QUANTITIES			
PLAN	SECTION	COUNTY	TOTAL SHEET
VAN	02 TR 2021-1	VARIOUS	4
		CONTRACT NO. 64796	3
		LUNDS TREE AND MOWER	