



FILE PATH = p:\388035\pmt\laescomon\me\local\p\MECD\00\Documents\01_Americas\Transportation\60269938_Circle\Phase_1\000_CAD\005_Roadway\Sheets\60W29_Sht-Typical-01.dgn

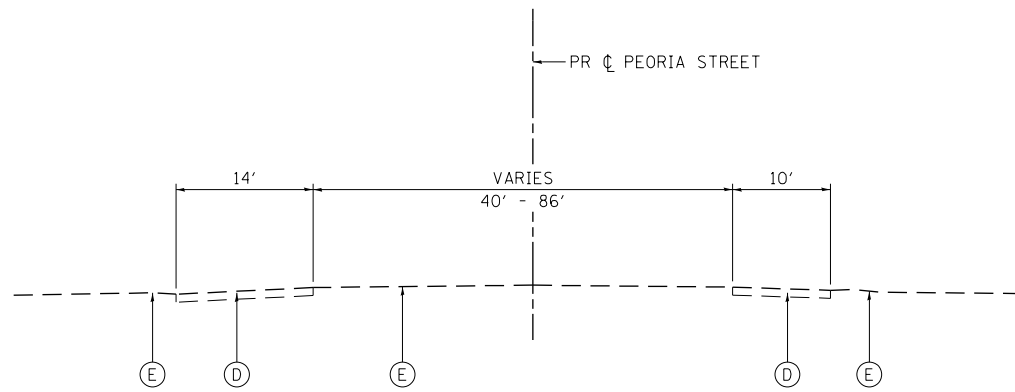

EXISTING TYPICAL SECTION


STA 3700+11.87 TO STA 3702+75.98
 EXISTING BRIDGE (SN 016-2082) INCLUDING APPROACH PAVEMENT
 STA 3702+75.98 TO STA 3705+17.14

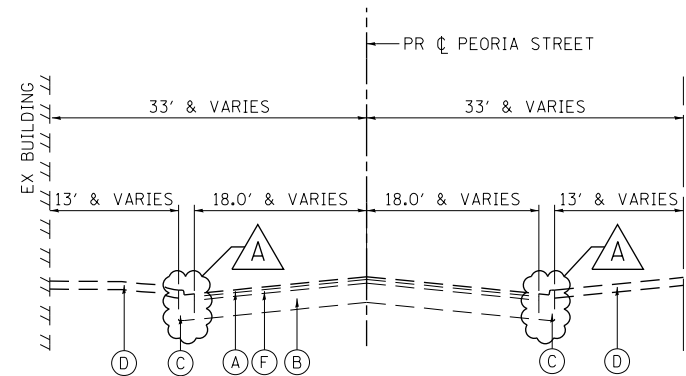

EXISTING TYPICAL SECTION


STA 3705+17.14 TO STA 3706+90.99
 EXISTING BRIDGE (SN 016-2082) INCLUDING APPROACH PAVEMENT
 STA 3702+75.98 TO STA 3705+17.14

- EXISTING**
- (A) HOT-MIX ASPHALT SURFACE COURSE, 1 3/4"
 - (B) PORTLAND CEMENT CONCRETE PAVEMENT, 12"
 - (C) CONCRETE CURB AND GUTTER
 - (D) PORTLAND CEMENT CONCRETE SIDEWALK
 - (E) GROUND SURFACE (ASSUME EXISTING 4" TOPSOIL DEPTH)
 - (F) HOT-MIX ASPHALT BINDER COURSE 2 1/4"

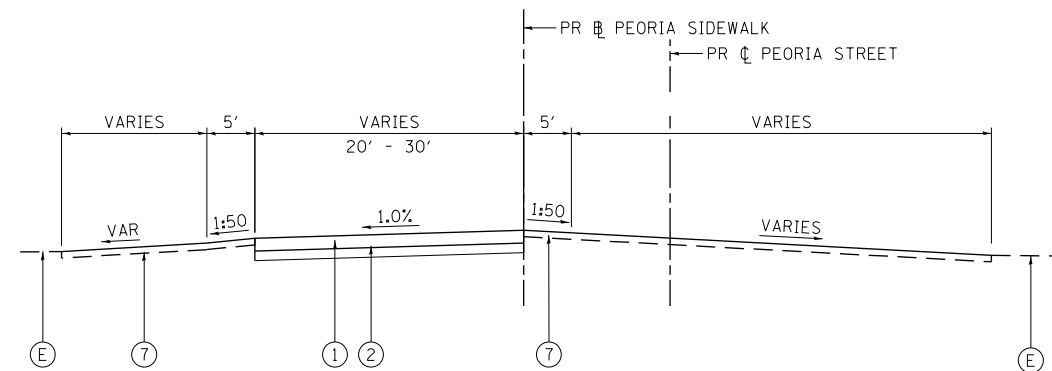

PROPOSED TYPICAL SECTION

STA 3700+11.87 TO STA 3702+38.64
 PROPOSED BRIDGE (SN 016-1708) INCLUDING APPROACH PAVEMENT
 STA 3702+38.64 TO STA 3705+49.73

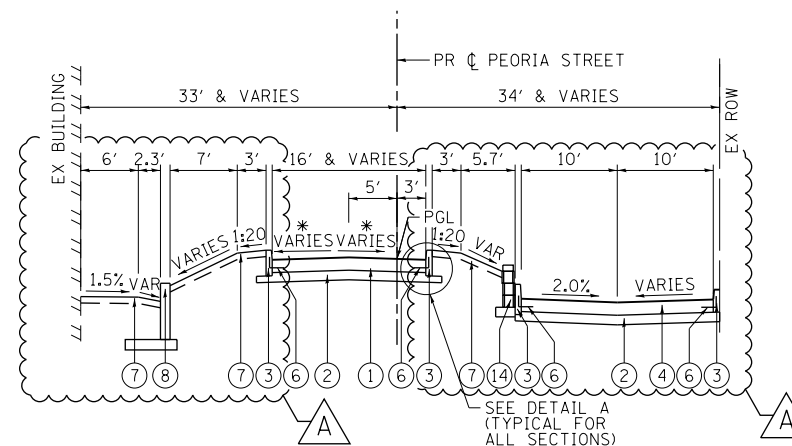

PROPOSED TYPICAL SECTION


STA 3705+49.73 TO STA 3707+04.98
 • SEE NOTE 2
 PROPOSED BRIDGE (SN 016-1708) INCLUDING APPROACH PAVEMENT
 STA 3702+38.64 TO STA 3705+49.73

PROPOSED

- (1) PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 8 INCH
- (2) SUB-BASE GRANULAR MATERIAL, TYPE B, 6"
- (3) CONCRETE CURB, TYPE B (SPECIAL) (CDOT)
- (4) PORTLAND CEMENT CONCRETE SIDEWALK (SEE ROADWAY PLAN & PROFILE FOR DEPTHS)
- (5) SAND CUSHION, 4 INCH, (CDOT)
- (6) #5 TIE BARS, 30" LONG AT 30" C-C
 (INCLUDED IN PRICE FOR BID FOR CONCRETE CURB, TY B (SPECIAL) (CDOT))
- (7) TOPSOIL FURNISH AND PLACE, 4"
- (8) RETAINING WALL (SEE RETAINING WALL PLANS)
- (9) TEMPORARY PAVEMENT (SEE TYPICAL SHT 3 FOR DETAILS)
- (10) SUB-BASE GRANULAR MATERIAL, TYPE B, 4"
- (11) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24
- (12) CONCRETE BARRIER WALL (SPECIAL)
- (13) CONCRETE BARRIER BASE (SPECIAL)
- (14) SEGMENTAL CONCRETE BLOCK WALL

NOTES:

1. AS INDICATED ON THE ROADWAY PLANS, TYPICALLY AT LEAST 6' (4' MIN) OF PROPOSED SIDEWALK WIDTH MUST HAVE A CROSS SLOPE OF 1:64 OR LESS.
2. TYPICAL LOCAL ROADWAY CROSS SLOPE VARIES BETWEEN 1.4% AND 3.6% AS INDICATED ON THE PLANS. SEE ROADWAY AND GRADING PLAN DETAILS FOR ROADWAY SLOPE TRANSITIONS.



D160W29-sht-Typical-01.dgn	DESIGNED - JLV	REVISED - 12/18/2013
USER NAME = BAW:tor t	DRAWN - SED	REVISED -
PLOT SCALE = 20.0000' / in.	CHECKED - JMG	REVISED -
PLOT DATE = 12/19/2013	DATE - 10/30/2013	REVISED -

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS
 PEORIA STREET

SCALE: NONE SHEET 1 OF 3 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94/290	2013-011R	COOK	356	23
CONTRACT NO. 60W29			ILLINOIS FED. AID PROJECT	