

STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths					
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	Table 5
3, 4	1'-5''	1'-11''	2'-1''	2'-4''	2'-3''
5	1'-9''	2'-5''	2'-7''	2'-11''	2′-10′′
6	2'-1''	2'-11''	3′-1′′	3′-6″	3'-4''
7	2'-9''	3′-10′′	4'-2''	4'-8''	4'-6''
8	3'-8''	5′-1′′	5′-5′′	6'-2''	5′-10′′
9	4'-7''	6′-5′′	6′-10′′	7'-9''	7'-5''

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C


Table 4: Epoxy bar, Top bar lap, 0.8 Class C

Table 5: Epoxy bar, Top bar lap, Class B

Threaded splicer bar length = min. lap length + l_2^{\prime} + thread length


* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.


Location	Bar size	No. assemblies required	Table for minimum lap length
Concrete Wearing Surface	#4	43	Table 3
Approach Slab	#4	50	Table 3
Approach Slab	#5	92	Table 3
Approach Footing	#5	80	Table 3

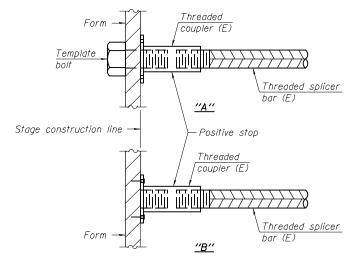


INSTALLATION AND SETTING METHODS

"A" : Set bar splicer assembly by means of a template bolt.
"B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms.
(E) : Indicates epoxy coating.

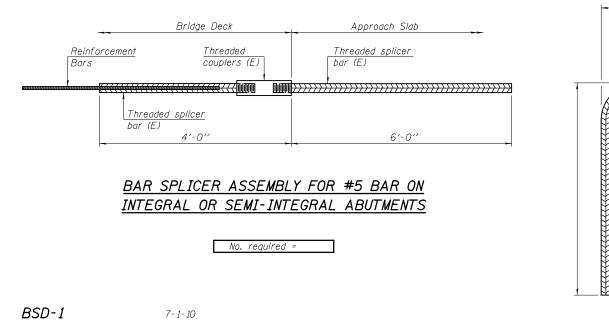

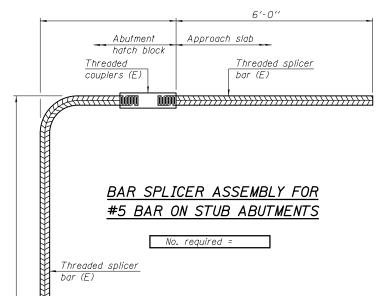

				Threaded splicer bar (E)			Bloxdorf P.C. ENGINEERS- WAL ENGINEERS- SURVEYORS-
BSD-1	7 - 1 - 10					Design Firm Licer	se No. 184-002703
FILE NAME =	USER NAME = keysrb	DESIGNED CME	REVISED -		BAR SPLICER ASSEMBLY AND MECHANICAL SPLICER DETAILS	F.A.P. SECTION	COUNTY TOTAL SHEET SHEETS NO.
c:\pw_work\pwidot\keysrb\d0134590\07400	13-70432-016-BSD.dgn	CHECKED GJB	REVISED -	STATE OF ILLINOIS	STRUCTURE NO. 074–0003	721 (115BR)BR	PIATT 39 27
	PLOT SCALE = 0:2.0000 ':' / in.	DRAWN MML	REVISED -	DEPARTMENT OF TRANSPORTATION			CONTRACT NO. 70432
CB PROJECT NO. 08049-7	PLOT DATE = 1/24/2014	CHECKED MCB	REVISED -		SHEET NO. 16 OF 18 SHEETS	ILLINOIS FED. AID PROJECT	



STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required

NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi

yield strength. All reinforcement shall be lapped and tied to the splicer bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications. See approved list of bar splicer assemblies and mechanical splicers for alternatives.