

### STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths							
Bar size to be spliced	Table 1	Table 2	able 2 Table 3 Table 4		Table 5	Table 6	
3, 4	1'-5''	1'-11''	2'-1''	2'-4''	2'-7''	2'-11''	
5	1'-9''	2'-5"	2'-7''	2'-11''	3'-3''	3′-8′′	
6	2'-1''	2'-11''	3'-1''	3′-6′′	3′-10′′	4'-5''	
7	2'-9''	3′-10′′	4'-2"	4'-8''	5′-2′′	5′-10′′	
8	3′-8′′	5′-1′′	5′-5′′	6'-2''	6'-9''	7′-8′′	
9	4'-7''	6′-5′′	6′-10′′	7′-9′′	8'-7''	9′-8′′	

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C

Table 4: Epoxy bar, Top bar lap, 0.8 Class C


Table 5: Epoxy bar, Class C

Table 6: Epoxy bar, Top bar top, Class C

Threaded splicer bar length = min. lap length +  $1^{l_2}$ " + thread length

\* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.


Location	Bar size	No. assemblies required	Table for minimum lap length		
Deck	#5	76	3		
Abutments	#6	16	3		

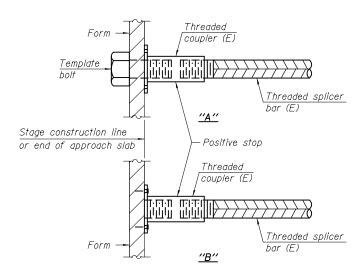

#### INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt.
"B": Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E): Indicates epoxy coating.

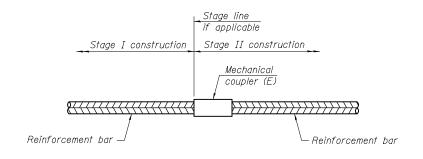


## STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required
Deck	#5	560

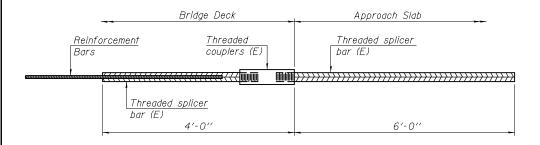

# BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

No, required =

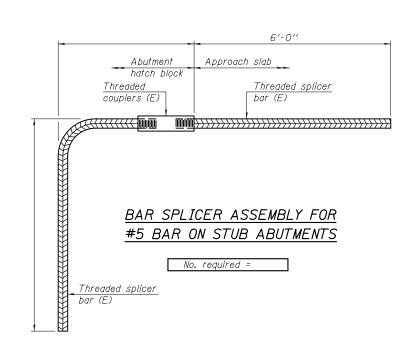

# <u>NOTES</u>

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

COUNTY

ST. CLAIR 46 38

CONTRACT NO. 76D51

All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications.

See approved list of bar splicer assemblies and mechanical splicers for alternatives.

BSD-1

1-27-12

DESIGNED	ATH	EXAMINED	Timote A A. 1 Ct	DATE	JANUARY 22, 2014	Τ
CHECKED	VHV		ACTING ENGINGER OF STRUCTURAL SERVICES			4
DRAWN	Steffen	PASSED	A Carl Proper	REVISE	D	1
CHECKED	ATH VHV		ACTING ENGINEER OF BRIDGES AND STRUCTURES	REVISE	D	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BAR SPLICER ASSEMBLY AND MECHANICAL SPLICER DETAILS	F.A.I. RTE.	SECTION
SN 082-0227	255	82-4HVB-I
014 002-0227		
CHEET NO. 10 OF 17 CHEETS		