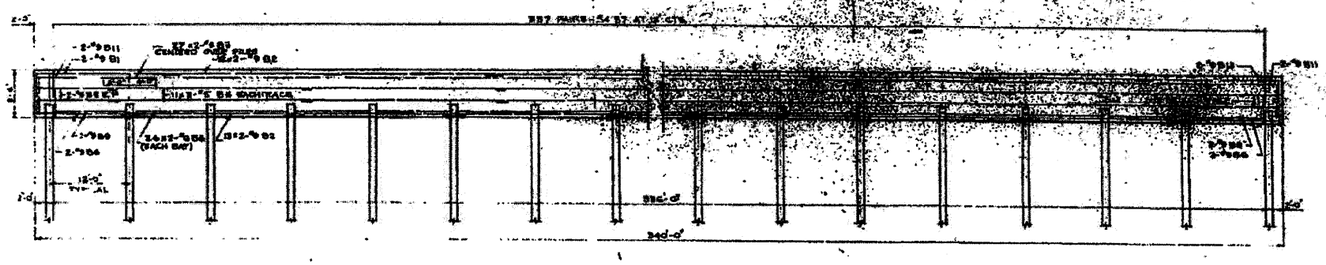

BEAM ELEVATION STA. 129+20 TO STA. 132+60.36 (2 THUS)

HOR.- 1/8"=1'-0"
VER.- 1/4"=1'-0"

INFORMATION ONLY

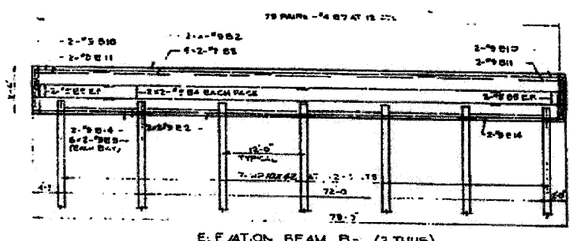

ELEVATION BEAM B- (2 THUS)

HOR.- 1/8"=1'-0"
VER.- 1/4"=1'-0"

LOW WEST
(LARAMIE AVENUE)



ELEVATION BEAM B-2

HOR.- 1/8"=1'-0"
VER.- 1/4"=1'-0"



ELEVATION BEAM B-3

HOR.- 1/8"=1'-0"
VER.- 1/4"=1'-0"



BAR	DIMENSIONS E	G
B1	2'-0"	21'-0"
B5	7'-8"	12"
B10	3'-0"	17'-0"
B11	3'-0"	7'-0"
B15	3'-0"	11'-0"
B19	2'-0"	23'-0"
B21	1'-0"	20'-0"



BAR-B7

BILL OF MATERIALS

ITEM	UNIT
REINFORCEMENT BARS	
CLASS 'A' CONCRETE	CU.YD.
PROTECTIVE COAT	SQ.FT.
STRUC. EXCAVATION	CU.YD.
FURNISHING STEEL PILES HP 10X42	LIN.FT.
DRIVING STEEL PILES	LIN.FT.
TEST PILE STEEL	
PILE TEST LOADING	
SUB-BASE BEAM SEPT. T-4	CU.YD.

* INCIDENTAL TO TEST PILE(STEEL) ABOVE

STATE OF WYOMING DEPARTMENT OF TRANSPORTATION

PERSHING ROAD
DRY LAND BRIDGE
BEAMS

SCALE: AS NOTED
DATE
DESIGNED
DRAWN
CHECKED

SHEET 27 OF

Note: For Pile Data see sh. #23.

NOTES

1. ALL REINFORCING BARS SHALL BE LAPPED 24 DIAMETERS
2. [illegible] REINFORCEMENT BARS SHALL
3. [illegible] EACH FACE.
4. [illegible] INDICATE C/L LINES OF CURB
5. [illegible] THE VIBRATORY METHOD.
6. [illegible] PREFERENCE LOCATIONS
7. [illegible] (AREEI) (MATTEY).
8. [illegible] SHEET 28 FOR STRUCTURAL [illegible] SHEET 29 FOR DRY LAND
9. [illegible] FOR THE BEAMS AND PILE CAPS
10. [illegible] ACCORDANCE WITH THE APPLICABLE

Rev. Furnishing Steel Piles 12 BP53, 6300 Lin Ft. to HP10X42, 4483 Lin. Ft., Driving Steel Piles from 6300 to 4483 Lin. Ft.