



DATE  
BY  
SURVEYED  
PLOTTED  
CHECKED  
REVISIONS  
NO. DATE

DATE  
BY  
SURVEYED  
PLOTTED  
CHECKED  
REVISIONS  
NO. DATE

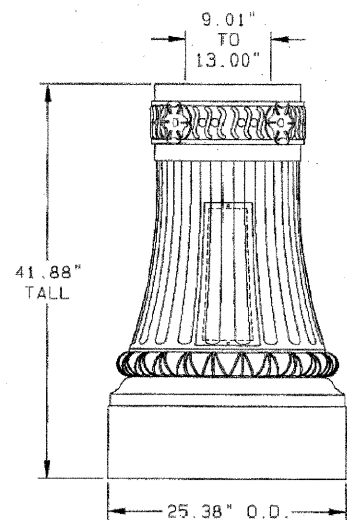


DETAIL 9 HN25AB DECORATIVE BASE

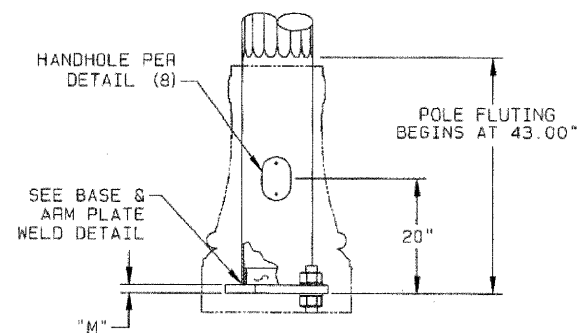

DETAIL 10 HN25AB POLE BASE

(4) -ANCHOR BOLTS, GALVANIZED THE FULL LENGTH. EACH BOLT FURNISHED WITH (2) -HEX NUTS, (2) -FLAT WASHERS AND (1) -LOCKWASHER.



DETAIL 11 ANCHOR BOLT

NOTES:

- POLE AND ARM SHAFTS 13.00" AND SMALLER-CONFORMS TO ASTM DESIGNATION: A595 GR. A WITH 55,000 P.S.I. MINIMUM YIELD STRENGTH. LINEAR TAPER-0.14"/FT. POLE AND ARM SHAFTS LARGER THAN 13.00"-CONFORMS TO ASTM DESIGNATION: M-223 A572 GR. 65 WITH A 65,000 P.S.I. MINIMUM YIELD STRENGTH. LINEAR TAPER-0.14"/FT.
- BASE PLATE AND SIMPLEX PLATES-CONFORM TO AASHTO M-183 (ASTM: A36).
- ANCHOR BOLTS-ALL STRUCTURES: ASTM F1554 GR.55 55,000 P.S.I. MINIMUM YIELD STRENGTH. (AASHTO M314)
- TRAFFIC SIGNAL ARM END CAP SECURED IN PLACE WITH 3 STAINLESS STEEL SET SCREWS. (TRAFFIC SIGNAL ARM END CAP PROVIDED WITH (2) ADDITIONAL STAINLESS STEEL HEX BOLTS).
- ALL NON-STAINLESS THREADED FASTENERS TO BE HOT DIP GALVANIZED TO ASTM DESIGNATION: A153 (AASHTO M232).
- SIMPLEX CONNECTING BOLTS-ASTM DESIGNATION: A325 (M164) GALVANIZED TO ASTM DESIGNATION: A153 LUBRICATE THREADS IN FIELD IF NECESSARY BEFORE INSTALLATION.
- ALL VEHICULAR AND/OR PEDESTRIAN SIGNAL LIGHTS AND NECESSARY HARDWARE FOR ATTACHMENT TO BE FIELD LOCATED AND FURNISHED BY OTHERS.
- POLES AND ARMS TO BE GALVANIZED TO ASTM DESIGNATION: A123 (AASHTO M111). ACCESSORIES TO BE HOT DIP GALVANIZED TO ASTM DESIGNATION: A153 (AASHTO M232).
- ACCESS HOLES IN ARMS AT SIGNALS TO BE FIELD DRILLED BY CONTRACTOR-LOCATED AS SHOWN IN PLANS.
- LUMINAIRE ARM SHAFT CONFORMS TO 2" SCHEDULE 40 PIPE W/ 36,000 PSI MIN. YIELD STRENGTH.
- SHAFT GAUGE OR THICKNESS ARE AS FOLLOWS: 11 GA.= 0.1196", 7 GA.= 0.1793", 5 GA.= 0.2092", 3 GA.=0.2391", AND 2" SCHED.40 PIPE = 0.154".

LOADING AND ALLOWABLE STRESS CRITERIA: 1994 AASHTO "STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR SIGNS, LUMINAIRES AND TRAFFIC SIGNALS".

STATE OF ILLINOIS

GENERAL NOTES

POLE AND SIGNAL ARM DATA - OPTION 1

POLE TUBE			POLE BASE				ANCHOR BOLT				SIGNAL ARM TUBE			MAXIMUM LUMINAIRE ARM SPAN (FT)	
BASE DIA. (IN)	TOP DIA. (IN)	LENGTH (FT)	GAUGE OR THK. (IN)	SQUARE "S" (IN)	BOLT CIRCLE "Y" (IN)	THK. "M" (IN)	HOLE / SLOT "Z" (IN)	DIA. "K" (IN)	LENGTH "J" (IN)	HOOK "H" (IN)	THREAD LENGTH "U" (IN)	FIXED END DIA. (IN)	GAUGE OR THICK (IN)		SPAN (FT)
12.50	8.65	27.50	5	17.00	17.00	1.50	1.75	1.50	54.00	6.00	8.00	9.00	7	20.00	8.00

POLE AND SIGNAL ARM DATA - OPTION 2

POLE TUBE			POLE BASE				ANCHOR BOLT				SIGNAL ARM TUBE			MAXIMUM LUMINAIRE ARM SPAN (FT)	
BASE DIA. (IN)	TOP DIA. (IN)	LENGTH (FT)	GAUGE OR THK. (IN)	SQUARE "S" (IN)	BOLT CIRCLE "Y" (IN)	THK. "M" (IN)	HOLE / SLOT "Z" (IN)	DIA. "K" (IN)	LENGTH "J" (IN)	HOOK "H" (IN)	THREAD LENGTH "U" (IN)	FIXED END DIA. (IN)	GAUGE OR THICK (IN)		SPAN (FT)
12.50	8.65	27.50	5	17.00	17.00	1.50	1.75	1.50	54.00	6.00	8.00	8.00	7	20.00	8.00

JOB  
TITLE TRAFFIC SIGNAL STRUCTURES

VALMONT INDUSTRIES, INC. RESERVES THE RIGHT TO INSTALL VARIOUS, ENGINEER APPROVED, MATERIAL HANGING ACCOMMODATIONS TO FACILITATE THE MANUFACTURING PROCESS.

**valmont**  
Valley, NE 68064  
(402) 359-2201

ORDER NUMBER: 42203-07  
PAGE NUMBER: 2 OF 2  
DRAWING NUMBER: IL4Z20307  
REV

FILE NAME = ...trans\Fin\_dwg\698\_5\_det03.dgn

USER NAME = \_USER\_  
DESIGNED -  
DRAWN BAH  
CHECKED APS  
PLOT DATE = 12/17/2009

DESIGNED -  
DRAWN BAH  
CHECKED APS  
DATE -

REVISED -  
REVISED -  
REVISED -  
REVISED -

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

MISCELLANEOUS DETAILS

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A. RTE. SECTION COUNTY TOTAL SHEETS SHEET NO.  
08-00270-00-TL KANE 44 41  
CONTRACT NO. 63300  
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT