



**DETAIL A**  
(Typical Treated Timber Splices)

SPLICE LOCATED BETWEEN GUARDRAIL POSTS  
treated timber splice plate 2x12 (50x300),  
actual size 1 1/2 x 1 1/2 (40x290), 24(600) long  
with 8 evenly spaced 1/2(M12) galvanized  
bolts with nuts & washers.


SPLICE LOCATED AT GUARDRAIL POST  
1/2(M12) galvanized U-bolt with  
nut & washer

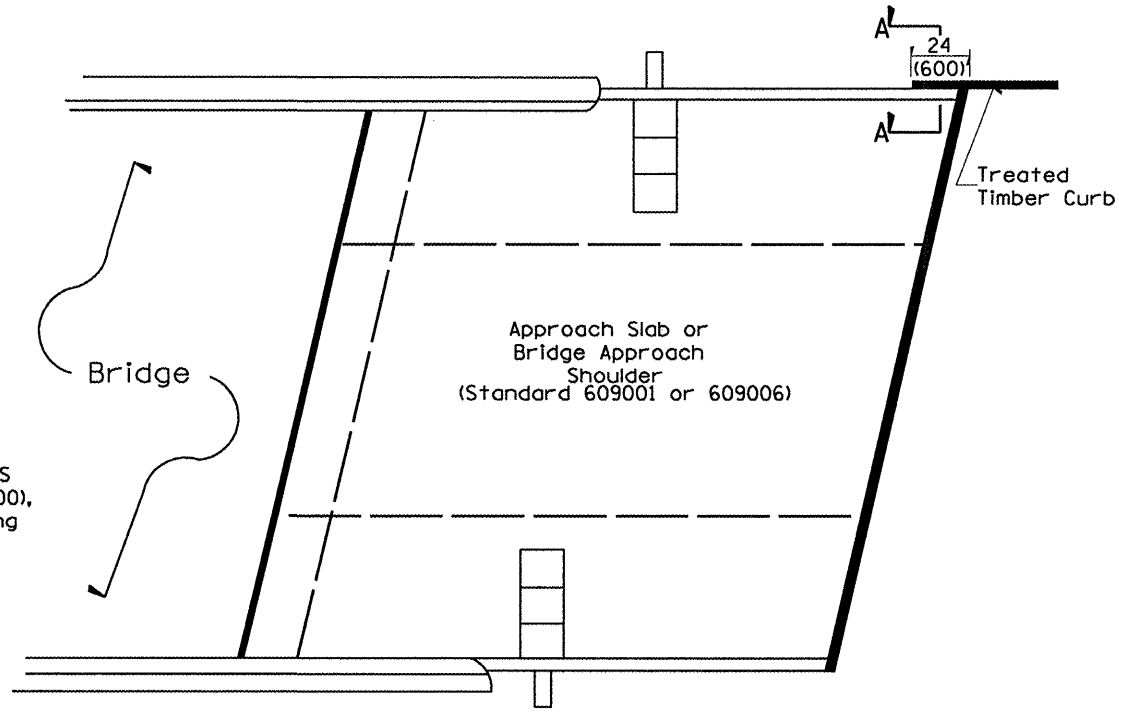

**PLAN VIEW**  
**APPROACH SLAB OR BRIDGE APPROACH SHOULDER**  
(STANDARD 609001 or 609006)

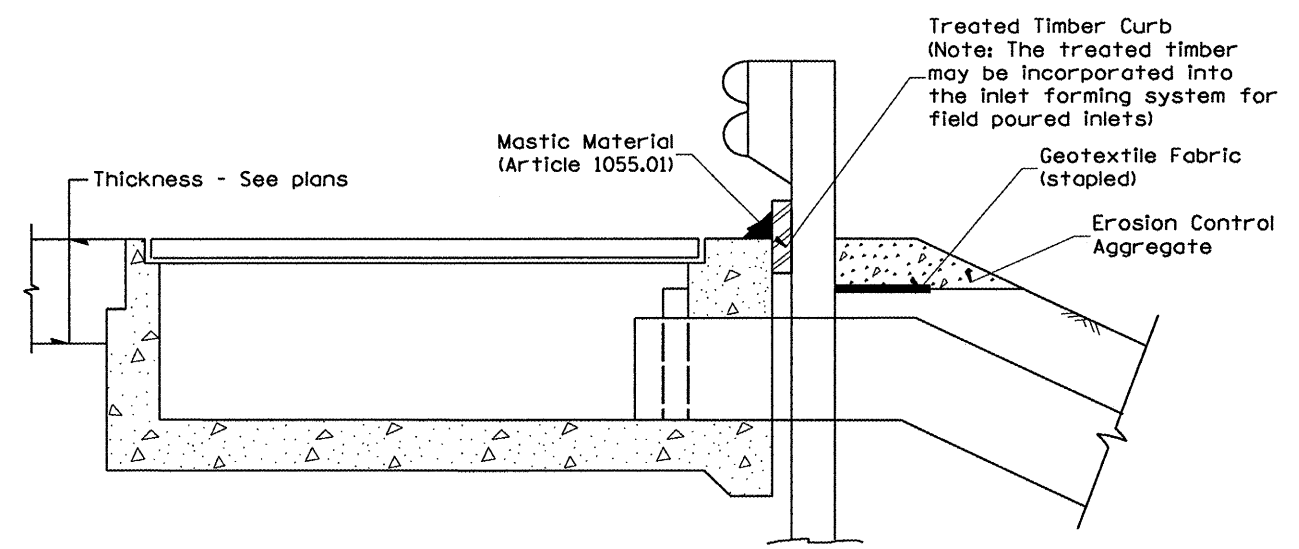

**TYPICAL SECTION WITH EROSION CONTROL CURB**  
**AT INLETS TYPE E & F (STANDARD 610001)**

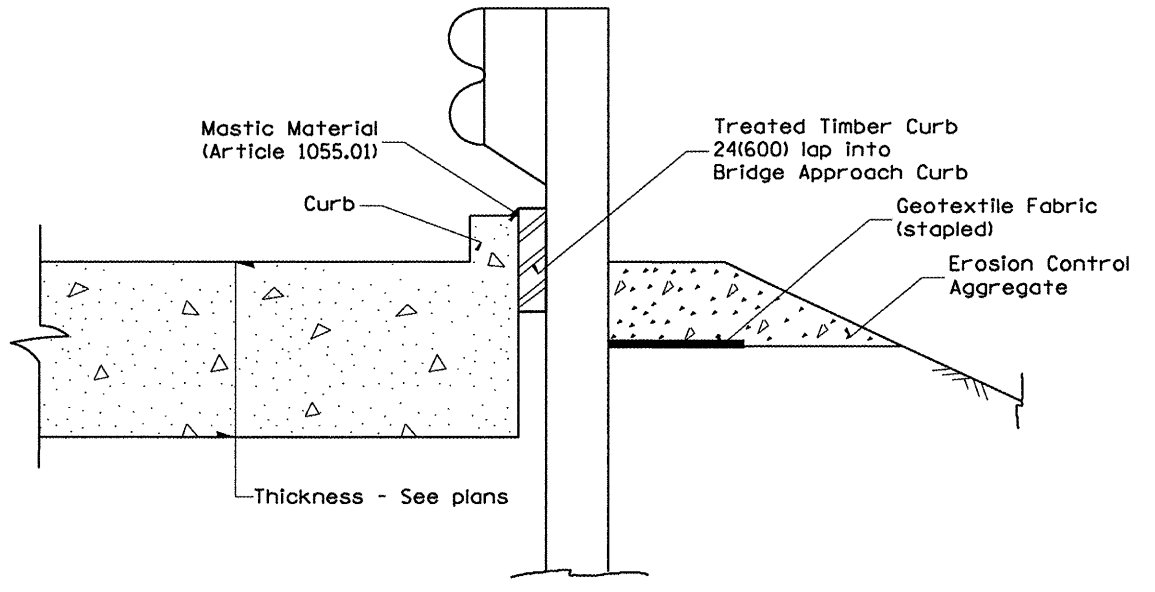

**SECTION A-A**  
**TYPICAL SECTION WITH EROSION CONTROL CURB**  
**AT BRIDGE APPROACH CURB**  
(STANDARD 609001 OR 609006)

All dimensions are in inches (millimeters)  
unless otherwise noted.

				<b>STATE OF ILLINOIS</b>		<b>GUARDRAIL EROSION CONTROL TREATMENTS</b>		SHT. 2 OF 2	
				<b>DEPARTMENT OF TRANSPORTATION</b>		NOT TO SCALE		CADD STD. 630101-D4	
		SECTION		COUNTY		TOTAL SHEETS		SHEET NO.	
		72-(17)RS-2(1,7-11)		PEORIA		30		30	
				CONTRACT NO.		66847			
				FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT			