



GENERAL NOTES

- 1. WHEN MEDIANS ARE PRESENT, PAVEMENT MARKINGS ARE TO BE PLACED ADJACENT TO MEDIANS.
- SOME OF THE INFORMATION INCLUDED WITH THIS DETAIL MAY NOT BE APPLICABLE TO THIS IMPROVEMENT.
- PAVEMENT MARKINGS ARE TO BE EXTENDED THROUGH OMISSIONS WHEN APPLICABLE.
- 4. A STRIPING KEY IS AVAILABLE ELSEWHERE AND SHALL BE SHOWN WHERE THE QUANTITIES ARE LISTED.
- 5. FINAL PAVEMENT MARKINGS SHALL BE IN PLACE PRIOR TO PLACING ANY RAISED REFLECTIVE PAVEMENT MARKERS.
- 6. THE FOLLOWING CRITERIA SHALL BE USED FOR SELECTING THE DIAGONAL PAVEMENT MARKING SPACING, <30 MPH USE 15' (<50 km/h USE 4.5 m) 30-45 MPH USE 20' (50-75 km/h USE 6.0 m) >45 MPH USE 30' (>75 km/h USE 9.0 m)

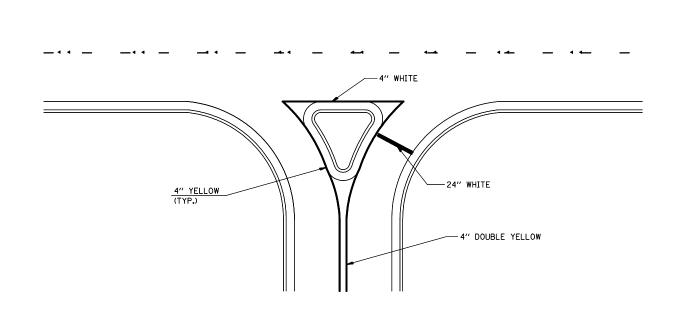

RIGHT IN - RIGHT OUT ACCESS

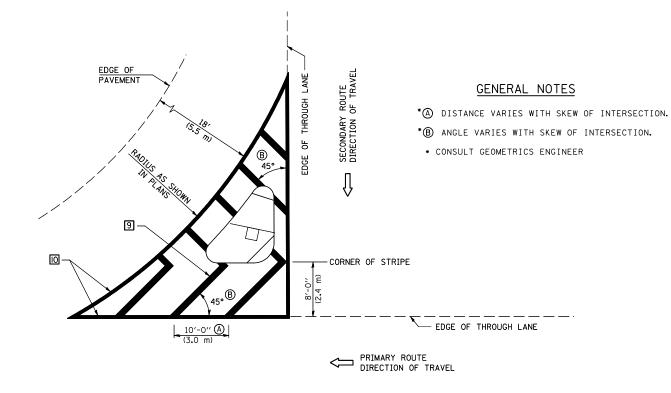

<u>ISLAND</u>

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

								DISTRICT 5 DETAIL NO. 7800AAAA				
FILE NAME =	USER NAME = cearlockjd	DESIGNED -	REVISED - 11/06	STATE OF ILLINOIS	PAVEMENT MARKING AND MARKERS (RURAL & URBAN APPLICATIONS)		F.A.P.	SECTION	COUNTY	TOTAL SHEET	1	
c:\pw_work\PWIDOT\CEARLOCKJD\dØ110229\7	0223details.dgn	DRAWN -	REVISED - 09/2009 - KJT					323	(143BR)BR	DOUGLAS	68 36	1
	PLOT SCALE = 40.0000 '/ IN.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION					CONTRACT NO. 70223		1	
	PLOT DATE - 12/17/2009	DATE -	DEVICED -	7	SCALE.	SUFET NO 3 OF A SUFETS	CTA TO CTA	550 0010 1	D. D	110 000 1507		4