
JOINT REPAIR DETAILS S.N. 021–2010 & 021–2011

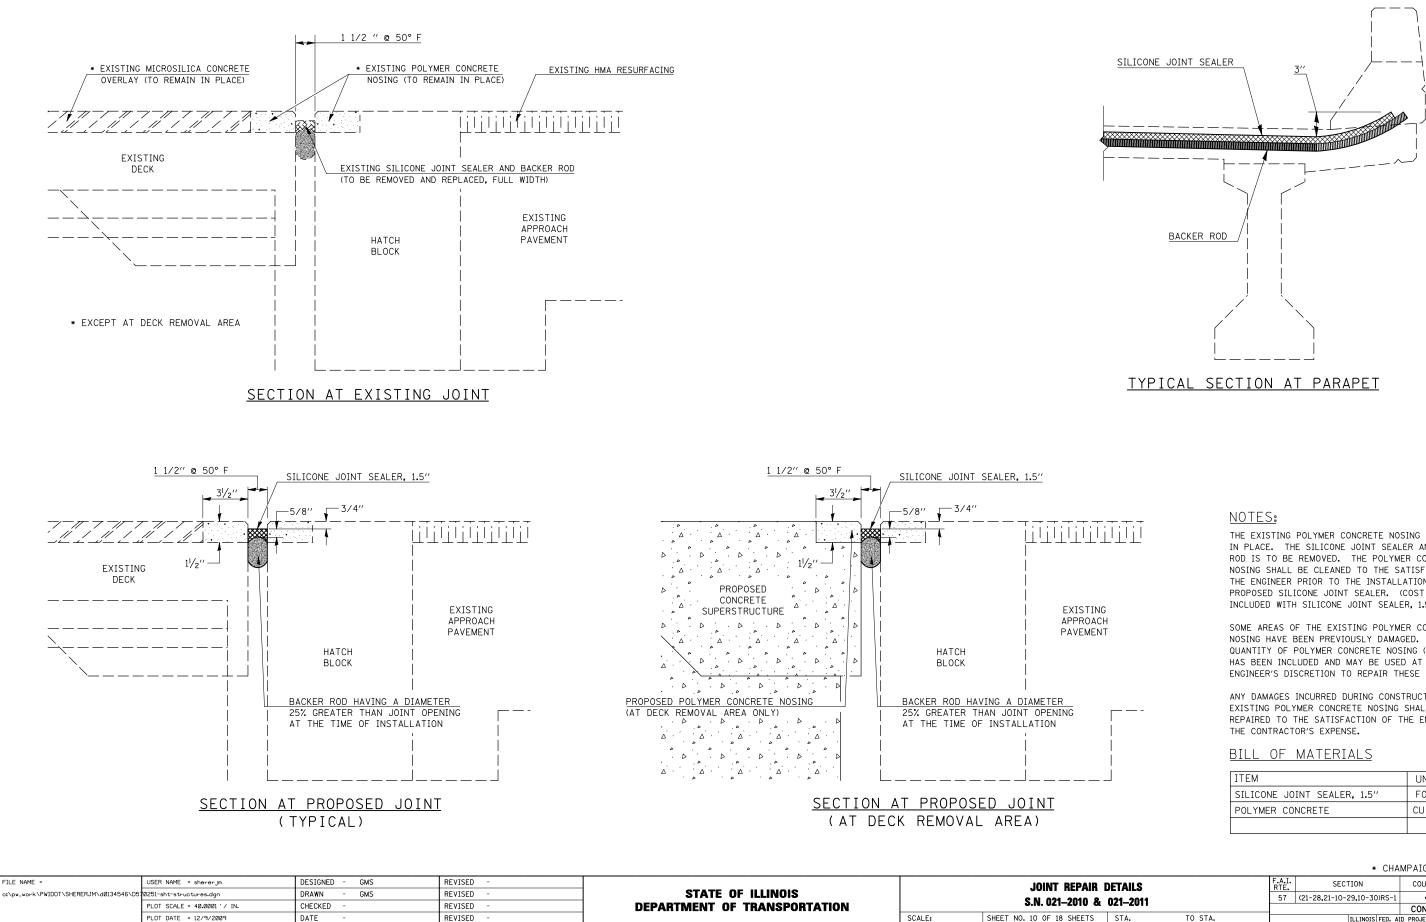

THE EXISTING POLYMER CONCRETE NOSING SHALL REMAIN IN PLACE. THE SILICONE JOINT SEALER AND BACKER ROD IS TO BE REMOVED. THE POLYMER CONCRETE NOSING SHALL BE CLEANED TO THE SATISFACTION OF THE ENGINEER PRIOR TO THE INSTALLATION OF THE PROPOSED SILICONE JOINT SEALER, (COST TO BE INCLUDED WITH SILICONE JOINT SEALER, 1.5")

SOME AREAS OF THE EXISTING POLYMER CONCRETE NOSING HAVE BEEN PREVIOUSLY DAMAGED, EXTRA QUANTITY OF POLYMER CONCRETE NOSING (0.2 CU. FT.) HAS BEEN INCLUDED AND MAY BE USED AT THE ENGINEER'S DISCRETION TO REPAIR THESE AREAS.

ANY DAMAGES INCURRED DURING CONSTRUCTION TO THE EXISTING POLYMER CONCRETE NOSING SHALL BE REPAIRED TO THE SATISFACTION OF THE ENGINEER AT

ITEM	UNIT	TOTAL
SILICONE JOINT SEALER, 1.5"	FOOT	192.0
POLYMER CONCRETE	CU FT	0.5

* CHAMPAIGN & DOUGLAS

DETAILS a 021–2011		F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.			
		57	(21-28,21-10-29,10-30)RS-1	*	115	96			
				CONTRAC	T NO. 7	70251			
	STA.	TO STA.		ILLINOIS FED. AID PROJECT					