

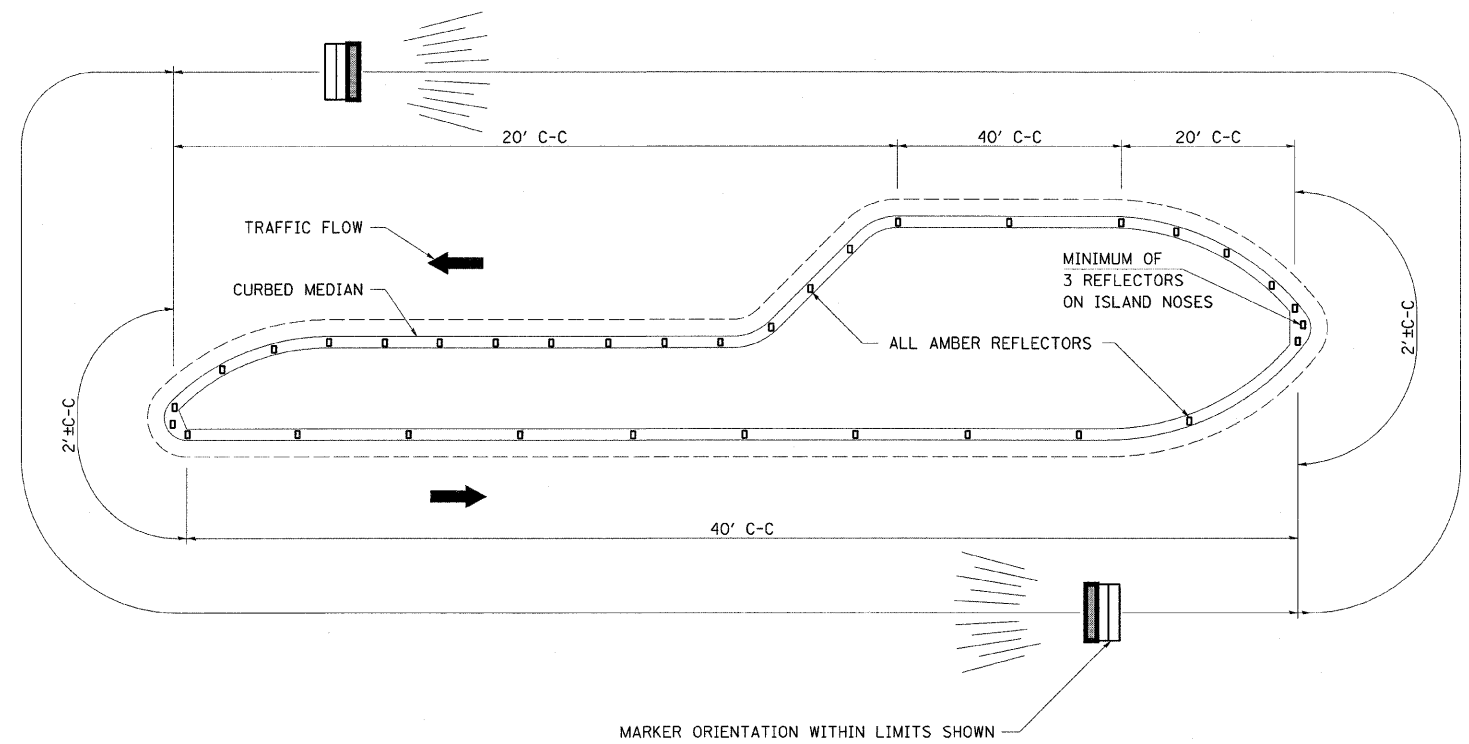


TYPICAL PLACEMENT OF PRISMATIC REFLECTORS ON CURBS

(IN UNLIGHTED AREAS)

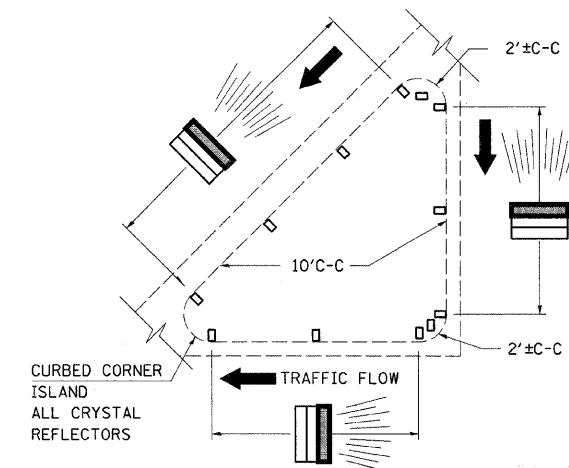

NO SCALE

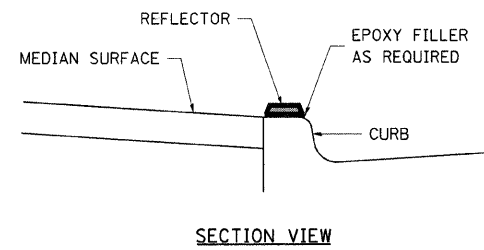

1. PRISMATIC REFLECTORS SHALL BE MONO-DIRECTIONAL AND POSITIONED SO THAT THE REFLECTIVE FACE IS FACING THE APPROACHING TRAFFIC
2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.

FILE NAME =	USER NAME = swartzrw	DESIGNED -	REVISED - MMO 12-99	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PAVEMENT MARKING & PRISMATIC REFLECTOR DETAILS	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
c:\pw_work\FWID01\SWARTZRW\d0168672.d7	4430-shr-details.dgn	DRAWN -	REVISED - MKS 04-08			328	(12R)RS-1	EFFINGHAM	54	50	
	PLOT SCALE = 20,0000' / IN.	CHECKED -	REVISED -			CONTRACT NO. 74430					
	PLOT DATE = 12/11/2009	DATE -	REVISED -			FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT					
				SCALE: NA SHEET NO. 1 OF 1 SHEETS STA. TO STA.							