



LEGEND

-  IMPACT ATTENUATOR
-  TEMPORARY CONCRETE BARRIER
-  BARRELS OR BARRICADES WITH STEADY BURNING LIGHT
-  TEMPORARY BRIDGE TRAFFIC SIGNALS
-  TYPE III BARRICADE

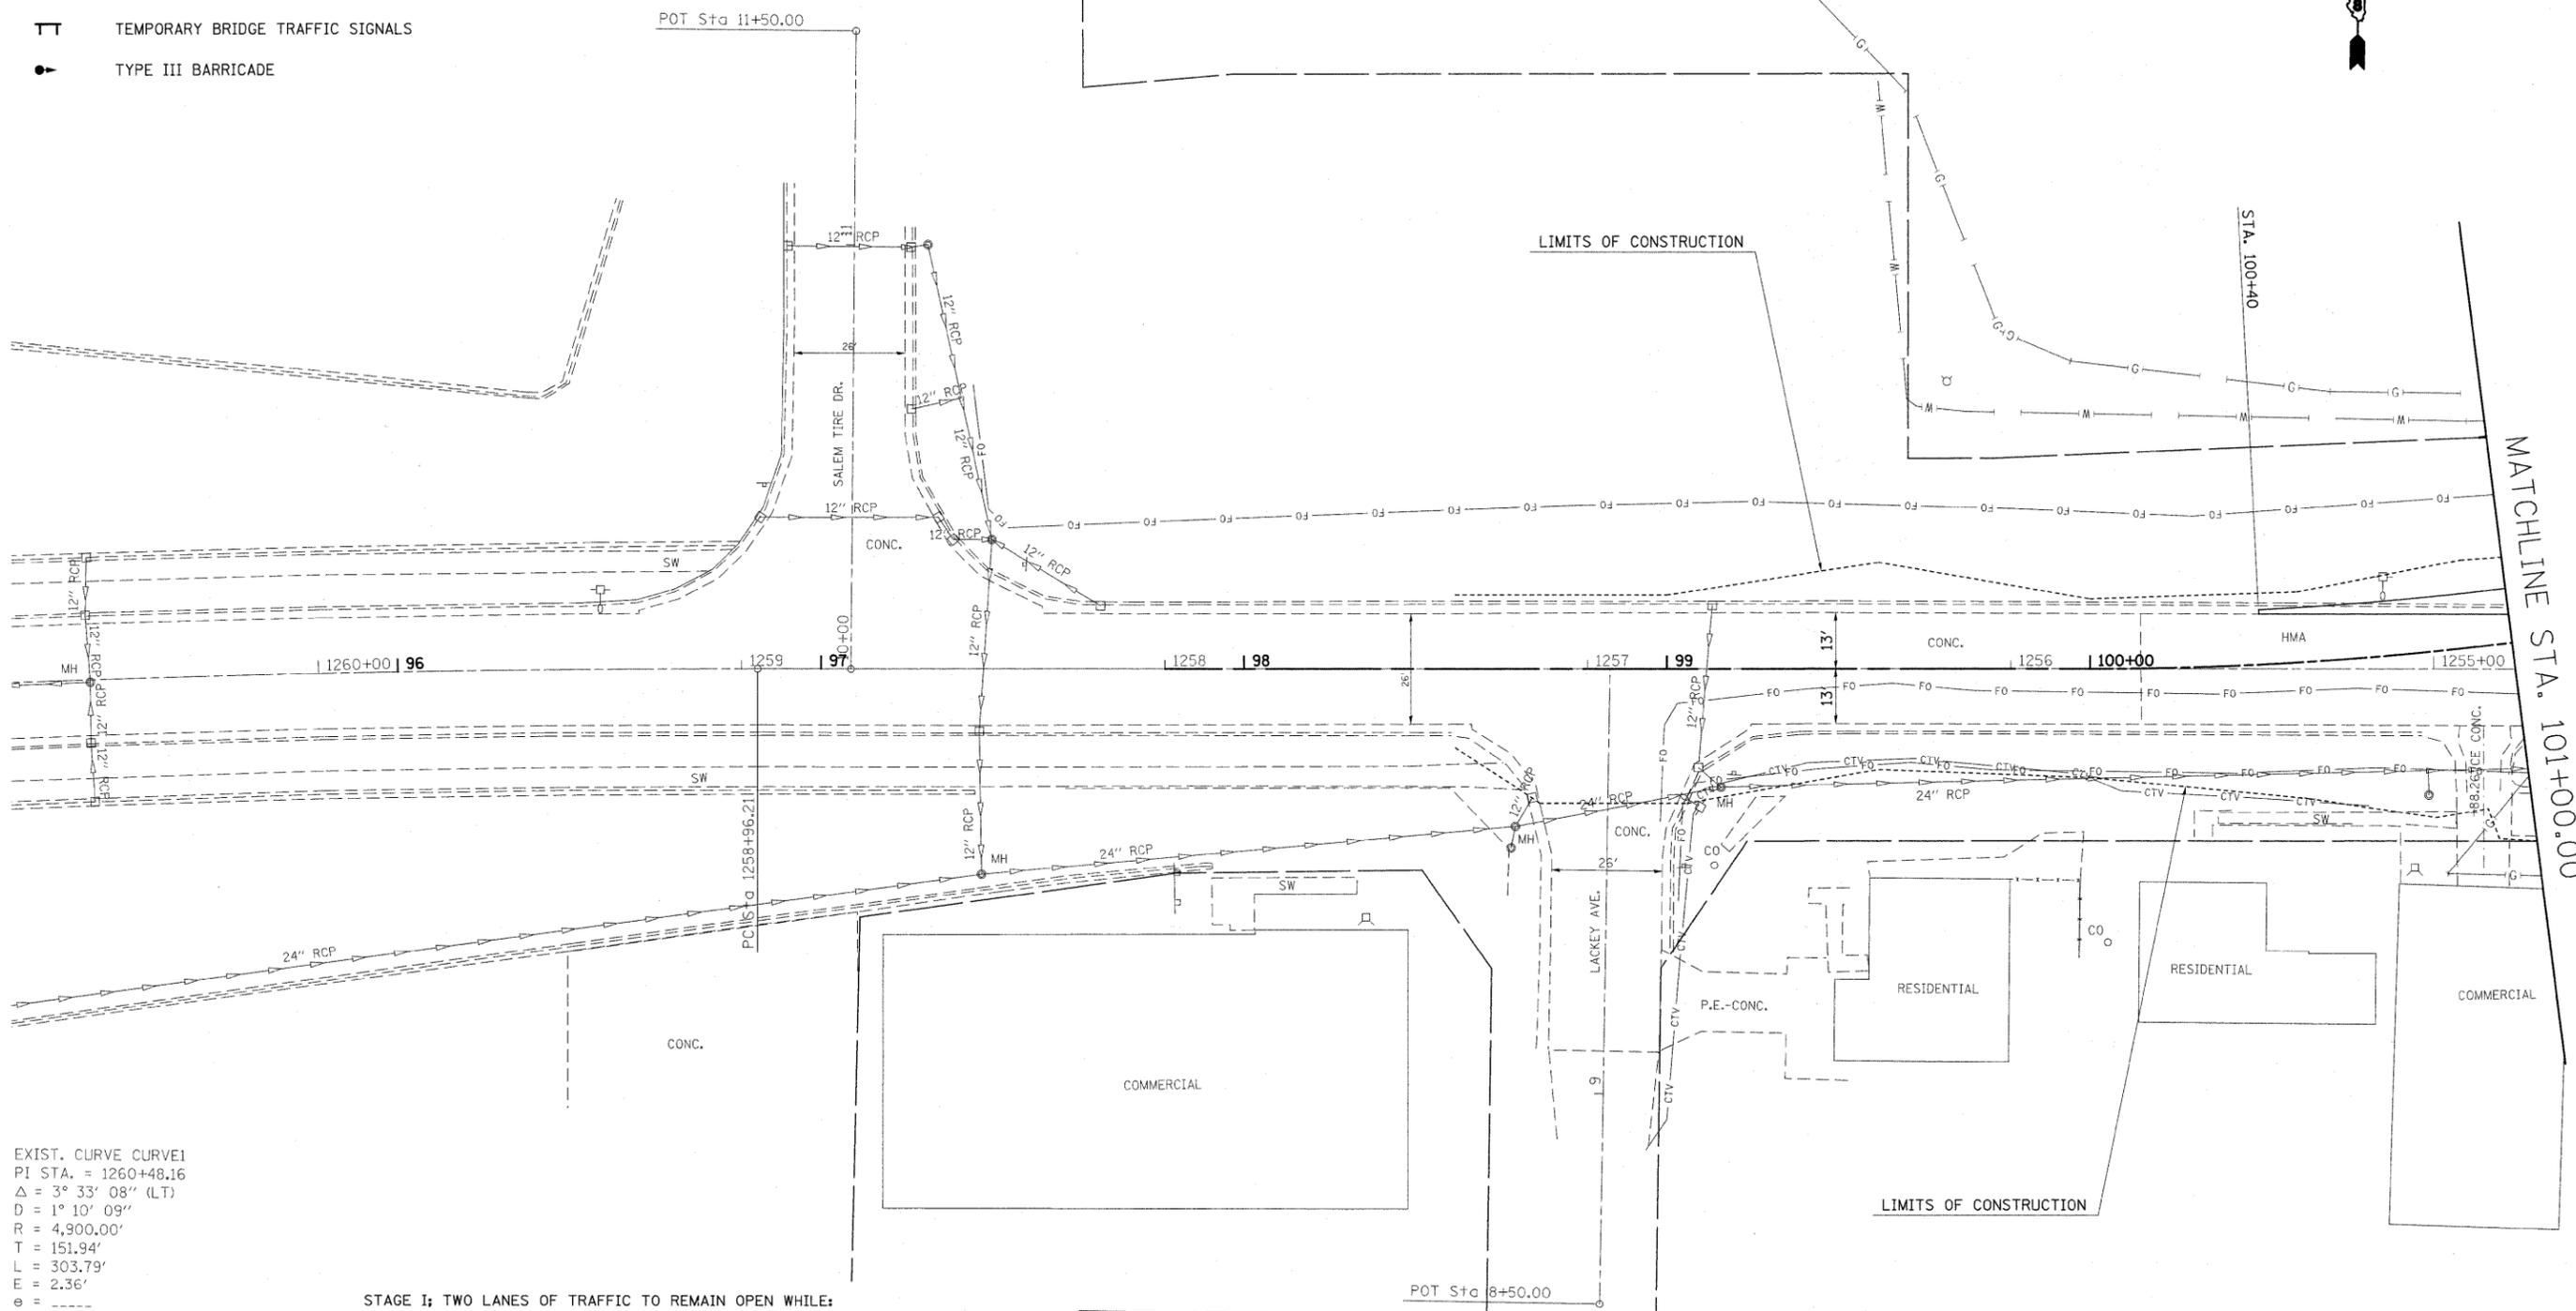

EXIST. CURVE CURVE1
 PI STA. = 1260+48.16
 $\Delta = 3^\circ 33' 08''$ (LT)
 $D = 1^\circ 10' 09''$
 $R = 4,900.00'$
 $T = 151.94'$
 $L = 303.79'$
 $E = 2.36'$
 $e =$
 $T.R. =$
 $S.E. RUN =$
 $P.C. STA. = 1258+96.21$
 $P.T. STA. = 1262+00.00$

- STAGE I; TWO LANES OF TRAFFIC TO REMAIN OPEN WHILE:
- USE STANDARD 701006 TO:
 - BUILD THE TRIPLE BOX CULVERT TO THE NORTH OF THE EXISTING CULVERT.
 - BRING IN EARTH FILL TO THE NORTH.
 - BUILD THE PROPOSED RELOCATED PAVEMENT AND NORTHERN SHOULDER.
 - USE STANDARD 701326 TO CONNECT THE PROPOSED PAVEMENT TO THE EXISTING PAVEMENT.
 - DO NOT PUT THE SUPER-ELEVATED SECTION IN ON THE EXISTING PAVEMENT, JUST TIE IT ON.



| | | | | | | | | | | | | | |
|--|------------------------|-----------------------------|-----------|---|-----------------------------------|-------------------------|----------|----------------|---------|--------|-----------------|--------------|----|
| FILE NAME = | USER NAME = herbaughnd | DESIGNED - | REVISED - | STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION | STAGE I CONSTRUCTION SHEET | | | F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. | |
| et:\pw\work\PMIDOT\HARBAUGHND\dms52271\fig03007a.dgn | | DRAWN - | REVISED - | | SCALE: 20 | SHEET NO. 1 OF 6 SHEETS | STA. --- | TO STA. 101+00 | 327 | 15B-1 | MARION | 58 | 15 |
| | | PLOT SCALE = 28,0000' / IN. | REVISED - | | CONTRACT NO. 76A59 | | | | | | | | |
| | | PLOT DATE = 1/11/2018 | REVISED - | | ILLINOIS FED. AID PROJECT | | | | | | | | |