INFORMATION ONLY

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-155	D4 BRG PNTG MTLZG 08	TAZEWELL	7	11



ELEVATION AT ABUT.

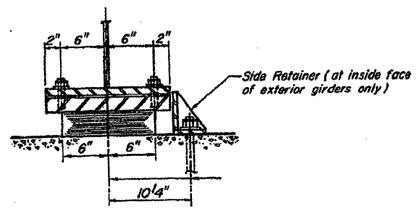

SECTION A-A

TYPE I ELASTOMERIC EXP. BRG.
(18 Required)

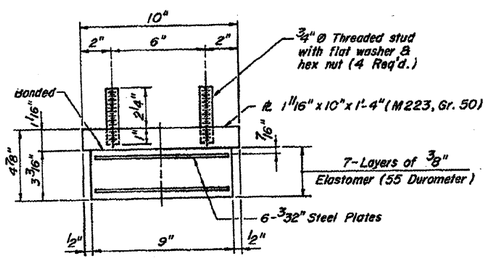

BEARING ASSEMBLY



SECTION A-A

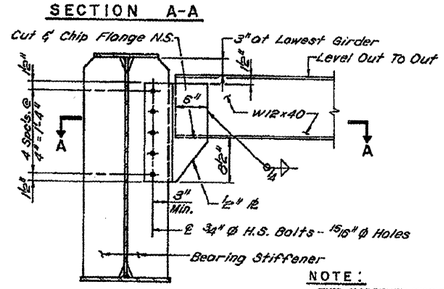

END DIAPHRAGM D
(16 REQ'D.)

NOTE:
TWO HARDENED WASHERS SHALL BE REQUIRED OVER ALL 15/16" Ø HOLES IN DIAPHRAGM CONNECTIONS.

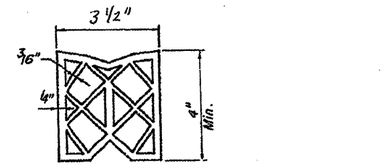

PREFORMED JOINT SEAL

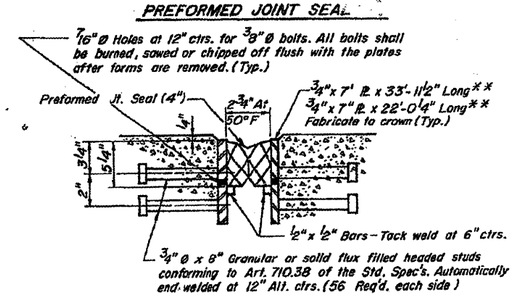

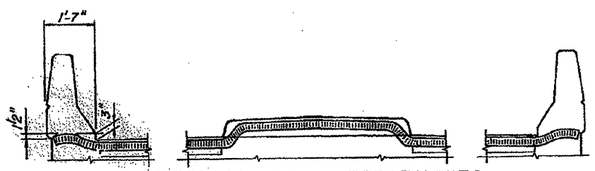

TYPICAL SEAL TREATMENTS

NOTE: After fabrication all surfaces of the steel plates shall be given one shop coat of paint specified for Structural Steel.

PREFORMED JOINT SEAL 3 1/2"

BILL OF MATERIAL

Item	Unit	Total
Preformed Joint Seal (3 1/2)	Lin. Ft.	132

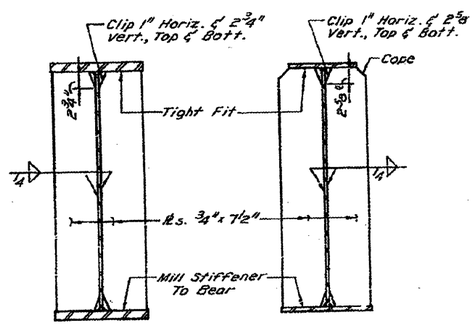

SECTION AT PIERS

SECTION AT ABUTMENTS

DETAIL OF BEARING STIFFENERS

090-0138

JOINT DETAIL & DIAPHRAGMS