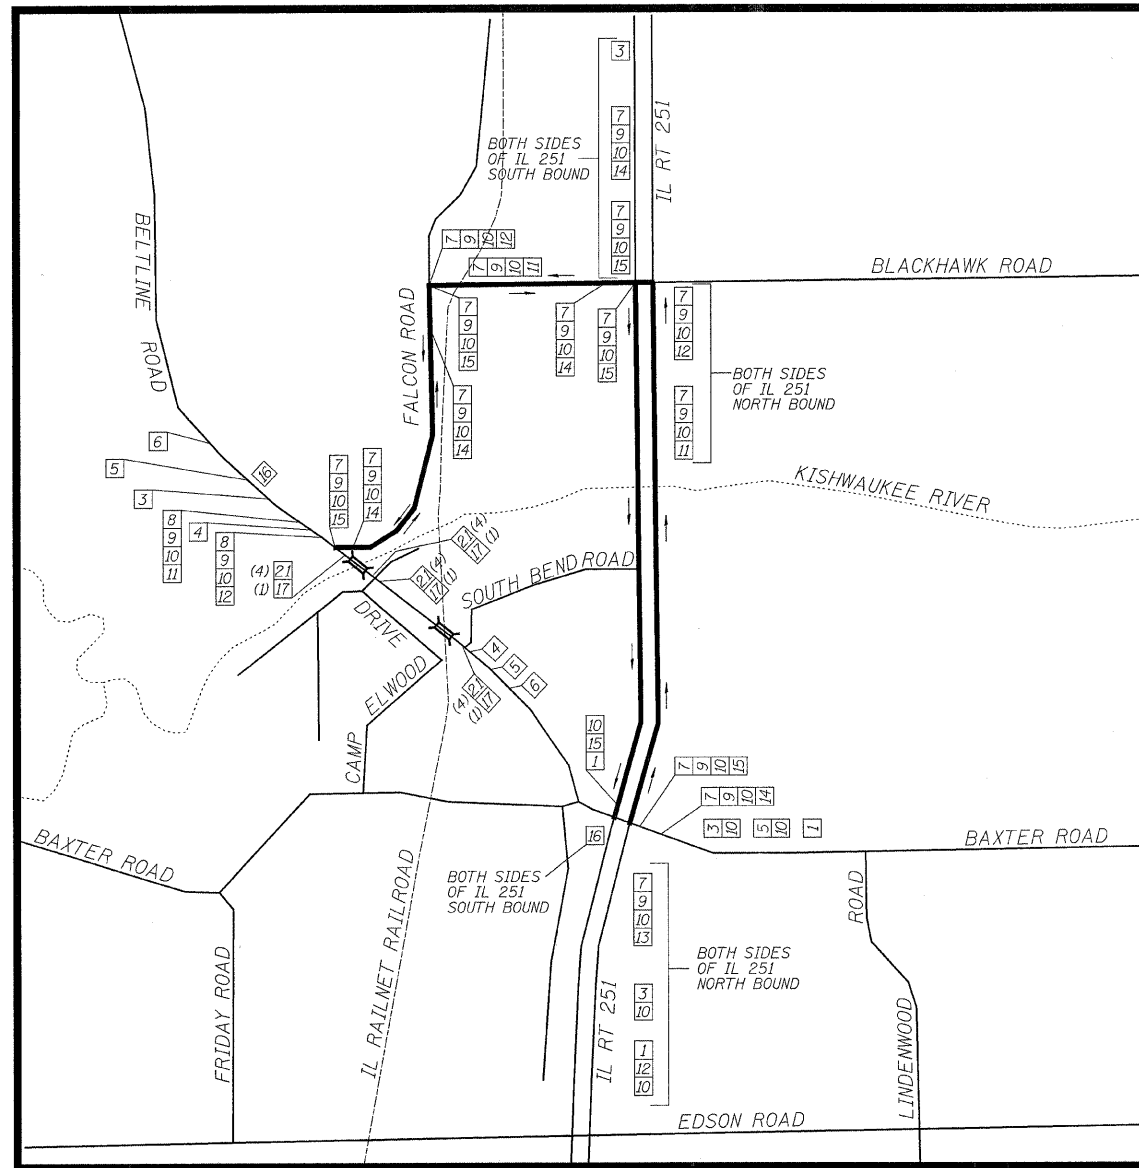







FBI AVE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
5154	04-00343-00-BR	WINNEBAGO	92	23
STA.		TO STA.		
FED. ROAD DIST. NO.	SUBDIVISION	FED. AID PROJECT		

TYPICAL INTERSECTION AT POINT OF DETOUR
































LEGEND

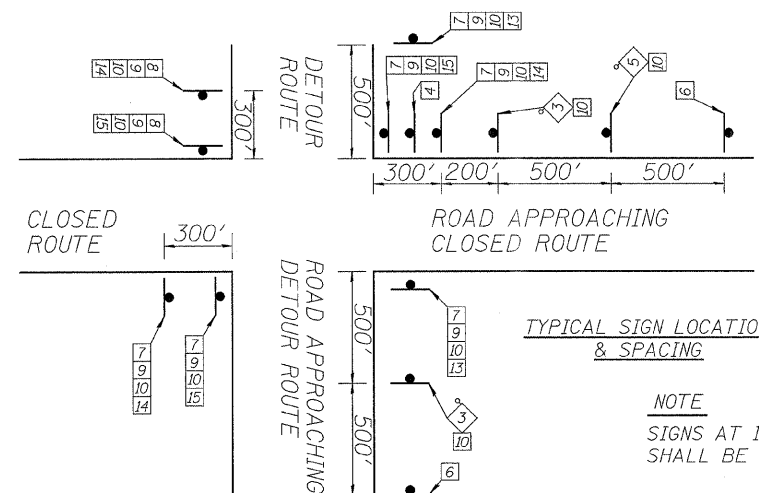
-  DETOUR ROUTE
-  ROAD OPEN TO LOCAL TRAFFIC ONLY
-  48" X 48" CONSTRUCTION SIGN WITH AMBER FLASHING LIGHT NUMBER DENOTES SIGN TYPE
-  M4-9 SERIES DETOUR SIGN WITH DIRECTION AND ROAD NAME PLATES NUMBER DENOTES TYPE
-  OTHER DETOUR SIGNS, NUMBER DENOTES TYPE

SPECIAL DETOUR NOTES

1. THE CONTRACTOR SHALL PAY PARTICULAR ATTENTION TO THE DETOUR GENERAL NOTES, SEE SHEET 24 FOR THE DETOUR GENERAL NOTES.
2. SEE SHEET 24 FOR INFORMATION ON THE DESIGN AND LOCATION OF THE DETOUR INFORMATION SIGNS.
3. THE TOTAL LENGTH OF THE DETOUR IS 6 MILES.
4. ALL DETOUR SIGNS, SHALL BE COMPLETELY COVERED AT ALL TIMES THE ROADWAY IS NOT CLOSED TO TRAFFIC

SIGN LEGEND

-   W20-3, 48" X 48" WITH AMBER FLASHING LIGHT. (4 REQ'D)
-   W20-2, 48" X 48" WITH AMBER FLASHING LIGHT. (6 REQ'D)
-   W21-1100, 48" X 48" WITH AMBER FLASHING LIGHT. (2 REQ'D)
-   W20-3, 48" X 48" WITH AMBER FLASHING LIGHT. (3 REQ'D)
-   W20-3, 48" X 48" WITH AMBER FLASHING LIGHT. (2 REQ'D)
-  WEST M3-2 (20 REQ'D)
-  EAST M4-8 (2 REQ'D)
-  DETOUR M4-8 (20 REQ'D)
-  BELPLINE ROAD M1-1100 (28 REQ'D)
-   M5-1 L (3 REQ'D)
-   M6-1 (6 REQ'D)
-   M6-3 (2 REQ'D)
-   M5-1 R (6 REQ'D)
-   M6-1 (7 REQ'D)
-   M4-8A (3 REQ'D)
-   RJ1-2 (4 REQ'D)
-  TYPE III BARRICADES WITH TWO FLASHING LIGHTS EACH. (16 REQ'D)



TYPICAL SIGN LOCATION & SPACING

NOTE
SIGNS AT INTERSECTIONS
SHALL BE SET BACK 50'